

ATCA-7221, R3

AdvancedTCA Processor Blade

■ Embedded Computing for
Business-Critical Continuity™

The ATCA-7221 processor blade is designed to operate within both the Centellis™ 3000 and Avantellis™ 3000 series of communications servers

- High performance processor blade with SMP support
- Dual 2.8 GHz Intel® Xeon™ LV processors
- Support for up to 16GB memory
- Complete software operating environment including OS
- PICMG 3.0 Gigabit Ethernet base interface support
- PICMG 3.1, Option 1 and 2 fabric interface support
- PMC site for I/O flexibility
- SATA or SAS hard disk drive options
- Service Availability Forum™ (SA Forum) compliant HPI and AIS software interfaces
- Designed for NEBS and ETSI compliance


The Emerson Network Power ATCA-7221 processor blade delivers a combination of performance, functionality and cost efficiency to help drive the successful implementation of next generation telecom networks. It builds on the AdvancedTCA® (ATCA®) standard to provide the right product at the right time to meet the needs of the telecom industry.

The Emerson ATCA-7221 processor blade is designed to operate within both the Emerson Centellis™ 3000 and Avantellis™ 3000 series of communications servers. Dual Intel Xeon LV processors operating at 2.8 GHz in a two-way symmetric multiprocessing (SMP) configuration deliver outstanding performance. The ATCA-7221 blade is ideal for implementing almost any control plane applications for next generation wireless and wireline telecommunications infrastructure equipment.

The ATCA-7221 blades are RoHS (6 of 6) compliant, eliminating the need for customers to incur the time, resource and expense associated with creating and/or converting existing product to meet this international requirement.

With dual Intel Xeon processors, the ATCA-7221 processor blade is the highest performance processing blade in the AdvancedTCA form factor. It also provides Gigabit Ethernet interfaces to the PICMG® 3.0 base interface and the PICMG 3.1 fabric interface in a dual star configuration. This allows the base interface to be used for control, signaling, or management while the fabric interface can be used for high performance data transport, providing control and data traffic separation.

An array of memory options, including up to 16GB of main memory, SAS and SATA storage interfaces and multiple hard drive options add to the performance and flexibility of the ATCA-7221 processor blade.

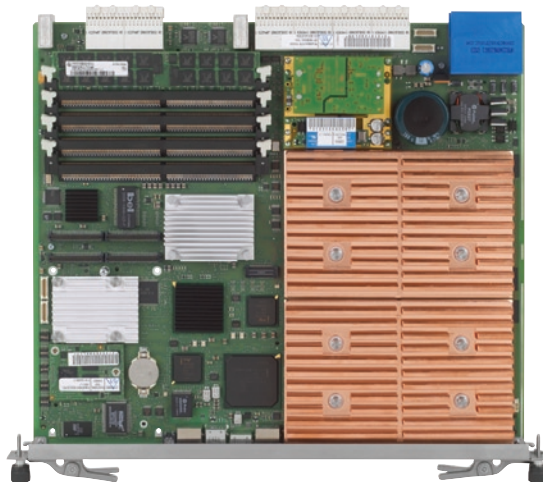

AdvancedTCA®


EMERSON™
Network Power

Available system S/W services:

- DHCP server located on the ATCA-F103 and ATCA-F300 switch blades responds to shelf internal DHCP requests
- Remote Update services to update the firmware of all IPMCs and Shelf Management Controller
- PXE-based boot of diskless clients
- Rolling upgrade of application software

CENTELLIS 3000 SOFTWARE PACKAGES

This software package comes complete with, and is verified with, a standard CGL distribution; MontaVista CGE 4.0, the market leader in Carrier Grade Linux. MontaVista CGE 4.0 comes complete with all required Linux Support Packages (LSPs) and Basic Blade Services software.

Basic Blades Services (BBS) software is provided to enable a set of ATCA hardware and software components into a fully integrated and verified telecom platform. The Centellis 3000 platform is ready for customers HA middleware and application environment.

Basic Blade Services (generic to all ATCA blades):

- Hardware Platform Management including local IPMC, LED, EKeying and blade extraction software
- Switch management
- Firmware upgrade utility
- Local management access (SNMP, CLI)

RELEVANT STANDARDS

- Linux Foundation
- SA Forum
 - ▲ Hardware Platform Interface (HPI) – rev. 1.0, A .01.01
- For more information on the Centellis and Avantellis 3000 platforms, please refer to the Centellis 3000 and Avantellis 3000 series datasheets.

Intelligent Platform Management Control

The PICMG 3.0 AdvancedTCA standard specifies a low-level, environmental management architecture referred to as intelligent platform management interface (IPMI). The ATCA-7221 blade implements this functionality using an off-the-shelf hardware and software based IPM controller that monitors all local, blade-specific environmental information. Management access to this information is provided through the SA Forum defined HPI interface.

Rear Transition Modules

Emerson offers two rear transition modules (RTMs) for the ATCA-7221 processor blade for the ultimate flexibility in storage interconnect and capacity options as well as external Gigabit Ethernet connectivity.

PMC Site

The ATCA-7221 blade includes a single width IEEE1386.1-2001 PMC site. The PMC site supports PCI-X 64-bit 133 MHz capable PMC modules.

Hardware

PROCESSOR

- Dual 2.8 GHz Intel Xeon LV processors in an SMP configuration
- 1MB L2 on-chip cache
- 800 MHz frontside bus
- Intel® E7520 system controller

MEMORY

- Up to 16GB, ECC-protected SDRAM. Supported configurations – 2GB, 4GB, 8GB, 16GB
- 256Byte CMOS NVRAM for BIOS configuration
- 1.0MB boot flash, dual bank architecture
- 32MB application flash, dual bank architecture
- 16MB CPU reset-persistent memory

COUNTERS/TIMERS

- Real-time clock
- Programmable watchdog timer

PCI MEZZANINE CARD

- PMC site with 64-bit 133 MHz PCI-X interface
- Dual Gigabit Ethernet interface

BASE AND FABRIC INTERFACES

- Dual star configuration
- PICMG 3.0 base interface compliant, Gigabit Ethernet (1.0Gbps)
- PICMG 3.1 fabric interface compliant, Gigabit Ethernet
 - ▲ PICMG 3.1, Option 1 – Single, redundant Gigabit Ethernet pair (1.0Gbps)
 - ▲ PICMG 3.1, Option 2 – Dual, redundant Gigabit Ethernet pairs (2.0Gbps)

EXTERNAL INTERFACES

- Front Panel
 - ▲ USB 2.0, mini USB Type AB (2)
 - ▲ Serial, RJ-45 (2)
 - ▲ 10/100/1000BaseT Ethernet, RJ-45 (1)

- Via Optional RTM (RTM-ATCA-7221/SCS/6E)
 - ▲ USB 2.0, Type A (2)
 - ▲ Serial, RJ-45 (2)
 - ▲ SAS interface (1)
 - ▲ Keyboard/mouse, PS2 (1)
 - ▲ SCSI interface (2)
 - ▲ Gigabit Ethernet (2)
 - ▲ SAS HDD slot (1)

- Via Optional RTM (RTM-ATCA-7221/FC/6E)
 - ▲ USB 2.0, Type A (2)
 - ▲ Serial, RJ-45 (2)
 - ▲ Keyboard/mouse, PS2 (1)
 - ▲ SATA HDD slot (1)

POWER REQUIREMENTS

- Dual-redundant –48V rail
- Input range: 39.5 – 72 VDC
- Typical power: 120 – 140W

THERMAL CHARACTERISTICS

- Operating range: –5° C to 55° C

RELEVANT BLADE SIZE

- 8U form factor, 280 mm X 322.5 mm, single slot

RELEVANT STANDARDS

- PICMG 3.0 (form factor, IPMI, base interface, hot swap, RTM)
- PICMG 3.1, Option 1 and 2

Ordering Information

Please contact a Emerson sales representative to order this product.

Regulatory Compliance

Item	Description
Designed to comply with NEBS	GR-63-CORE, NEBS Physical Protection, Level 3
	GR-1089-CORE, Electromagnetic Compatibility and Electrical Safety – Generic Criteria for Network Telecommunications Equipment. Level 3, Equipment Type 2
Designed to comply with ETSI	ETSI Storage, ETS 300 019-2-1, Class 1.2 equipment, Not Temperature Controlled Storage Locations
	ETSI Transportation, ETS 300 019-2-2, Class 2.3 equipment, Public Transportation
	ETSI Operation, ETS 300 019-2-3, Class 3.2 equipment, Partly Temperature Controlled Locations
Designed to comply with Acoustic	ETS-300-753, Equipment Engineering (EE); Acoustic noise emitted by telecommunications equipment
EMC	EN-300-386 Electromagnetic compatibility and Radio spectrum Matters (ERM); telecommunication network equipment; ElectroMagnetic Compatibility (EMC) requirements, Telecommunication equipment room (attended)
	FCC 47 CFR Part 15 Subpart B (US), Class A
	EMC Directive 89/336/EEC (EU)
	AS/NZS 3548 (Australia/New Zealand), Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment
	VCCI Class A (Japan), Voluntary Control Council for Interference by Information Technology Equipment
Safety	Compliance to UL/CSA 60950-1, EN 60950-1 and IEC 60950-1 CB Scheme. Marked with U.S. NRTL, Canadian Safety and CE Mark. Safety of information technology equipment, including electrical business equipment
	ETS 300-132-2 Environmental Engineering (EE); Power supply interface at the input to telecommunications equipment; Part 2: Operated by direct current (dc)
RoHS/WEEE compliance	DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL on the restriction of the use of certain hazardous substances in electrical and electronic equipment (RoHS)
	DIRECTIVE 2002/96/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL on waste electrical and electronic equipment (WEEE)

SOLUTION SERVICES

Emerson Network Power provides a portfolio of solution services optimized to meet your needs throughout the product lifecycle. Design services help speed time-to-market. Deployment services include global 24x7 technical support. Renewal services enable product longevity and technology refresh. Plus solution extras include enhanced warranty and repairs.

PICMG, AdvancedTCA and the AdvancedTCA logo are registered trademarks of the PCI Industrial Computer Manufacturers Group. Service Availability is a proprietary trademark used under license. Intel is a registered trademark and Xeon is a trademark of Intel Corporation or its subsidiaries in the U.S. and other countries. All other product or service names are the property of their respective owners.

This document identifies products, their specifications, and their characteristics, which may be suitable for certain applications. It does not constitute an offer to sell or a commitment of present or future availability, and should not be relied upon to state the terms and conditions, including warranties and disclaimers thereof, on which Emerson Network Power may sell products. A prospective buyer should exercise its own independent judgment to confirm the suitability of the products for particular applications. Emerson Network Power reserves the right to make changes, without notice, to any products or information herein which will, in its sole discretion, improve reliability, function, or design. Emerson Network Power does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent or other intellectual property rights or under others. This disclaimer extends to any prospective buyer, and it includes Emerson Network Power's licensee, licensee's transferees, and licensee's customers and users. Availability of some of the products and services described herein may be restricted in some locations.

Emerson Network Power.
The global leader in enabling
Business-Critical Continuity™.

- AC Power Systems
- Connectivity
- DC Power Systems
- Embedded Computing**

- Embedded Power
- Integrated Cabinet Solutions
- Outside Plant
- Power Switching & Control

- Precision Cooling
- Services
- Site Monitoring
- Surge & Signal Protection

Emerson Network Power

Sales Offices: Tempe, AZ U.S.A. 1 800 759 1107 or +1 602 438 5720, Shanghai, China +86 215292 5693
Paris, France +33 1 69 35 77 00, Tokyo, Japan +81 3 5424 3101, Munich, Germany +49 (0) 89 9 608 2 333
Hong Kong, China +852 2966 3210, Tel Aviv, Israel +972 3 568 4387

EmersonNetworkPower.com/embeddedcomputing

Business-Critical Continuity, Emerson Network Power and the Emerson Network Power logo are trademarks and service marks of Emerson Electric Co.
©2008 Emerson Electric Co.