


10Watts Wall Mount AC Adapter



UNIT : $\frac{\text{INCH}}{\text{MM}}$

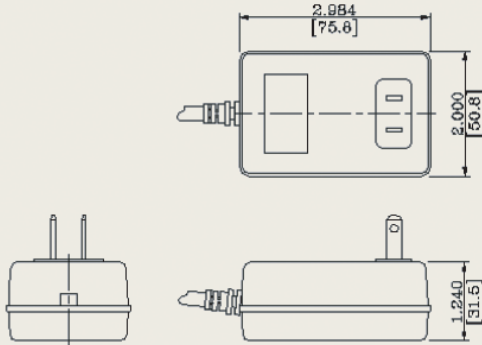

Electrical specifications

Input

Voltage 90 - 264 VAC
 Current 1.0Arms Max.
 Frequency 47 - 63 Hz

Output

Voltage (Vo)..... (see table)
 Tolerance 5%
 Power (Po) 12.5W Max.
 Hold up time 12ms min. at full load, 115 VAC
 Overvoltage protection ... Build-in
 Overcurrent protection ... 150% of full load
 Short circuit protection ... Pulsing mode, auto recovery
 Efficiency 70% typ. at full load and 115 VAC
 Ripple/Noise(Vp -p) 1% (20MHz bandwidth)

Output Electronic Specifications

Model No.	Po	Vo	Io max
VTC289237	6.6W	3.3V	2.0A
VTC289238	10W	5.0V	2.0A
VTC289242	10W	6.0V	1.66A
VTC289244	10W	7.5V	1.33A
VTC289247	10W	9.0V	1.11A
VTC289250	10W	12.0V	0.83A
VTC289253	12.5W	5.0V	2.5A
VTC289255	12.5W	12.0V	1.0A

Features

- Three pin wall mount input plug
- Wide range AC input
- Level B EMI filter
- Fully enclosed plastic case
- Fully regulated output
- High efficiency
- High Quality

Environmental

Operating temperature

0 deg. C to +40 deg. C ambient

Storage temperature

-20 deg. C to +80 deg. C ambient

EMI

FCC class B DOC (WN10A Series)
 Meet VCCI class B, CISPR 22 class

Safety

- BSMI
- CB
- CE
- FCC
- PSE
- UL/CUL
- CCC

