


## ENERGIZER NO. 1CR2 (EL1CR2)



Industry Standard Dimensions in mm (inches)

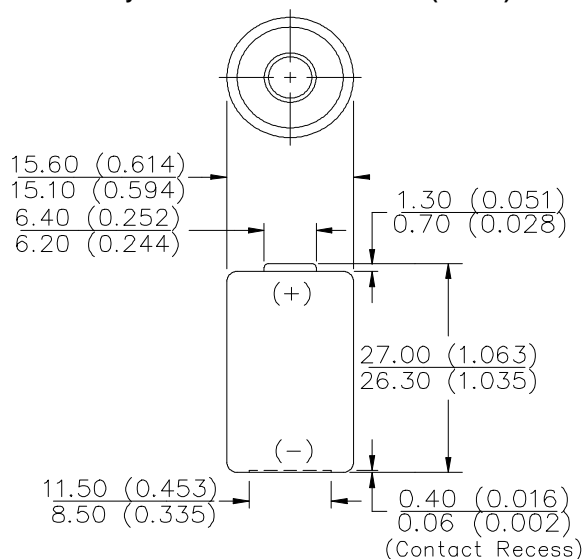

THIS BATTERY HAS UNDERWRITERS LABORATORIES COMPONENT RECOGNITION

This battery Contains a Positive Temperature Coefficient (PTC) Device to Limit Current Flow

Simulated Application Test  
 Estimated Average Service at 21°C (70°F)


Schedule:	Typical Drains (mA)	Load (ohms)	Cutoff Voltage		
			2.0 V Hours	1.55 V Cycles	1.3 V Cycles
24 hours/day	-	100	31.4	-	-
24 hours/day	1000	-	0.37	-	-
3 sec ON / 7 sec OFF	1200	-	-	-	800
3 sec ON / 27 sec OFF	900	-	-	1942	-

**Chemical System:** Lithium  
 Lithium/Manganese Dioxide (Li/MnO<sub>2</sub>)


**Designation:** IEC-CR15H270  
**Battery Voltage:** 3.0 Volts  
**Average Weight:** 11.0 grams (0.4 oz.)  
**Volume:** 5.2 cubic centimeters (0.3 cubic inch)  
**Average Capacity:** 800 mAh to 2.0 volts  
 (Rated Capacity at 100 ohms at 21°C)

**Maximum Reverse Charge Current:** 3 microampere  
**Max Discharge:** 1000 mA continuous - 2500 mA pulse

Typical Discharge Characteristics  
 Schedule: 3 sec ON / 27 sec OFF  
 Typical Drain: 900 milliamperes

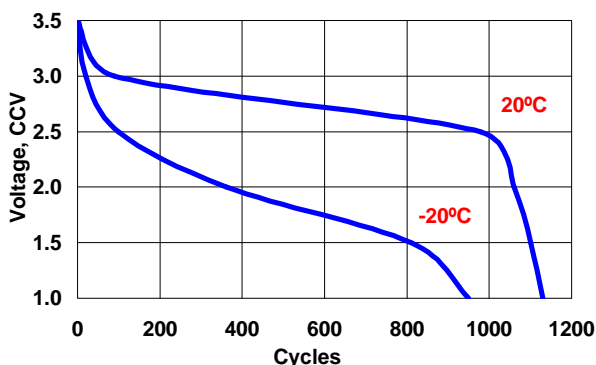

Typical Discharge Characteristics  
 Schedule: 3 sec ON / 7 sec OFF  
 Typical Drain: 1200 milliamperes

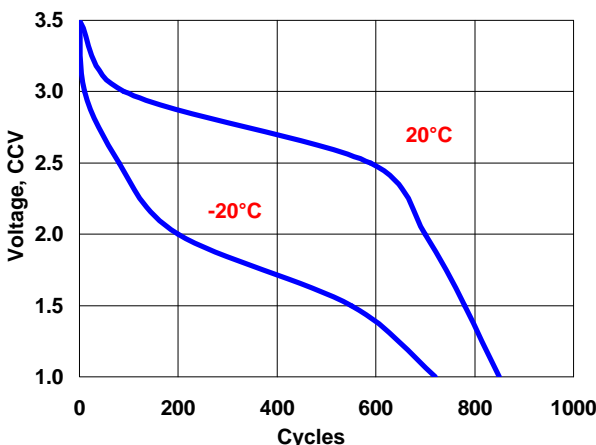

### Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. Inc. - All Rights Reserved