


ENERGIZER NO. CRV3 (ELCRV3)



Typical Dimensions in mm (inches)

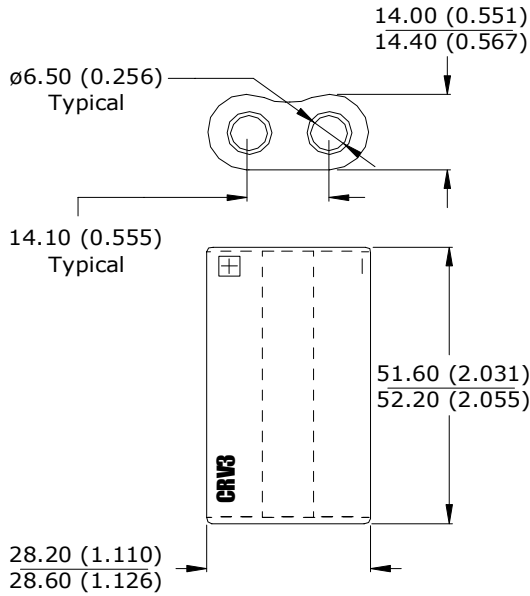

This battery Contains a Positive Temperature Coefficient (PTC) Device to Limit Current Flow

Simulated Application Test
Estimated Service at 21°C (70°F)

Schedule:	Typical Constant Current Drains at 2.6V	Cutoff Voltage 2.0V
Continuous Discharge	200 mA	14.7 Hours
Continuous Discharge	1000 mA	2.7 Hours

Schedule:	Typical Constant Power Drains at 2.6V	Cutoff Voltage 2.0V
Continuous Discharge	1000 mW	7.6 Hours
Continuous Discharge	2000 mW	3.4 Hours

Chemical System: Lithium/Iron Disulfide (Li/FeS₂)


Designation: Not Issued Yet
Battery Voltage: 3.0 Volts
Typical Weight: 32 grams (1.1 oz.)
Typical Volume: 24 cubic centimeters (1.5 cubic inch)
Average Capacity: 2900 mAh to 2.0 volts

(Rated Capacity at 200 mA at 21°C)


Storage Temp: -40°C to 60°C (-40°F to 140°F)
Operating Temp: -40°C to 60°C (-40°F to 140°F)
Max Discharge: 2 Amps Continuous
 3 Amps Pulse (2 seconds max)

Cells: Two-15LF in series
Jacket: Non-magnetic Plastic Label

Typical Constant Current @21°C
Continuous Discharge Characteristics

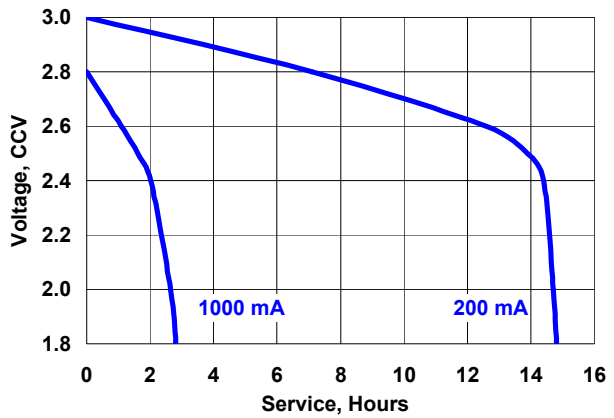

Typical Constant Power @21°C
Continuous Discharge Characteristics

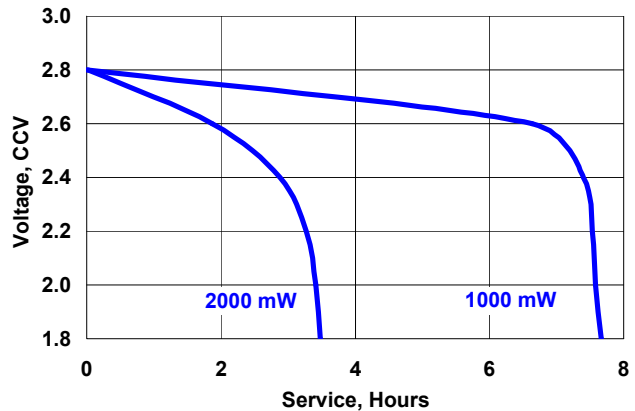

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. Inc. - All Rights Reserved