



Input Modules



A5B32 Units

DC Current Input

A5B32 modules plug into a backpanel to provide a single channel of analog input which is filtered, isolated, amplified, and converted to a proportional high-level DC voltage output signal.

Signal filtering is accomplished with a six-pole filter. Two poles of this filter are on the field side of the isolation barrier and the other four are in the output stage. After the initial field-side filtering, the input signal is chopped by a proprietary chopper circuit. Isolation is provided by transformer coupling, again using a proprietary technique to suppress transmission of common mode spikes or surges.

A precision 20 ohm current conversion resistor is supplied with the module. Extra resistors (AXR1) can be ordered.

Ordering Information

Model	Input	Output
A5B32-01	DC mA input	4 to 20mA
A5B32-02	DC mA input	0 to 20mA

Accessories

AXR1

Current conversion resistor (precision 20 ohm 0.1%)

Performance

Input Range

0 to 20mA or 4 to 20mA

Input Resistor (Current Sense Resistor)

Value: 20 ohms

Accuracy: $\pm 0.1\%$

Stability: $\pm 10\text{ppm}/^\circ\text{C}$

Input Protection

Continuous: 240V_{RMS} max

Transient: ANSI/IEEE C37.90.1-1989

CMV, Input to Output

Continuous: 1500V_{RMS} max

Transient: ANSI/IEEE C37.90.1-1989

CMR (50 or 60Hz)

160dB

NMR

95dB @ 60Hz, 90dB @ 50Hz

Accuracy

$\pm 0.05\%$ Span ($\pm 0.08\%$ max)

Nonlinearity

$\pm 0.02\%$ Span ($\pm 0.035\%$ max)

Stability

Input Offset: $\pm 1\mu\text{V}/^\circ\text{C}$ ($\pm 2\mu\text{V}/^\circ\text{C}$ max)

Output Offset: $\pm 20\mu\text{V}/^\circ\text{C}$ ($\pm 30\mu\text{V}/^\circ\text{C}$ max)

Gain: $\pm 25\text{ppm}/^\circ\text{C}$ ($\pm 50\text{ppm}/^\circ\text{C}$ max) of reading

$\pm 10\text{ppm}$ for Resistor

Noise

Input, 0.1 to 10Hz: 10nA rms (20nA_{RMS} max)

Output, 100KHz: 200 μV _{RMS} (400 μV _{RMS}, 800 μV _{P-P} max)

Bandwidth, -3dB

4Hz

Response Time, 90% span

200mS

Output Range

0 to +5V

Output Resistance

50 ohms

Output Protection

Continuous short to ground

Output Selection Time, (to $\pm 1\text{mV}$ of V_{out})

2.5 μS @ 200pF, 3.5 μS @ 500pF,

4.0 μS @ 1000pF, 6.0 μS @ 2000pF

Output Enable Control

Max Logic "0": +0.8V

Min Logic "1": +2.4V

Max Logic "1": +36V

Input Current, "0, 1": 0.5 μA

Power Supply Voltage

+5VDC $\pm 5\%$

Power Supply Current

30mA max

Power Supply Sensitivity

$\pm 2\mu\text{V}/\%$

Environmental

Operating Temperature Range: -40 to 85 $^\circ\text{C}$

Storage Temperature Range: -40 to 85 $^\circ\text{C}$

Relative Humidity: 0 to 95% noncondensing

RFI Susceptibility: $\pm 0.5\%$ span error @ 400MHz, 5W, 3 ft.

Approvals (CSA, FM)

Class I; Division 2; Groups A, B, C, D.



Ordering Information

Backpanels and Accessories

User's Manual

8500-299

A5B User's Manual. Acromag provides (1) manual with first purchase order at NO CHARGE. Additional manuals must be purchased. The first manual must be specified on the purchase order to ensure delivery.

Backpanels

APB01

16-channel, non-multiplexed backpanel. Non-addressable analog I/O signal channels provide each module with its own analog bus. The module output switch is continuously "on" when using this backpanel. A temperature sensor is mounted on each channel to provide cold junction compensation for thermocouple modules. Field connections are terminated with four screw terminals at each module site.

APB02

16-channel, multiplexed backpanel. Has two analog buses; one for input, one for output. Two-bus configuration takes advantage of the switch-controlled outputs on the input modules and the track-and-hold inputs on the output modules. Up to four APB02 backpanels can be daisy-chained. Includes temperature sensor and four screw terminals at each module site.

APB03

Single channel, non-multiplexed backpanel. See tables below for additional parts required.

APB04

Dual channel, non-multiplexed backpanel. See tables below for additional parts required.

The following parts are required for DIN rail mounting of one APB03 or APB04 backpanel:

Quantity	Part No.	Description
1	UM-BEFE35	Base element with snap foot
2	UM-SE	Side element

The following parts are required to DIN rail mount two or more APB03 or APB04 backpanels:

Quantity	Part No.	Description
2	UM-BEFE35	Base element with snap foot
2	UM-SE	Side element
Note 1	UM-BE35	Base element w/o snap foot
Note 2	UM-VS	Connection pin

Note 1: Quantity = # of panels - 2

Note 2: Quantity = 4 x (# of panels - 2)


Cables

AXCA004-xx

Interface cable for host system connection. General-purpose 26 conductor ribbon cable for use with APB01/02 backpanels. Specify length, -xx, in feet when ordering.

AXCA005

Daisy-chain cable, interconnects up to four APB02 backpanels.

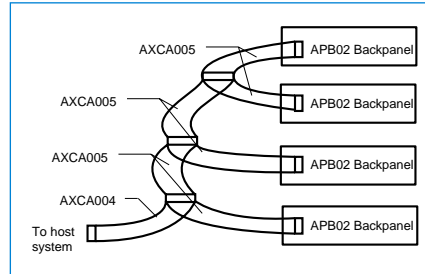

Power Supplies

AXPRT-003

Power supply, 120V AC input (104 to 132V range).

AXPRE-003

Power supply, 220V AC input (207 to 265V range).

Interface Accessories

AXEV

Evaluation board (single channel) with a test socket. See table below for additional parts required.

The following parts are required for DIN rail mounting of one AXEV evaluation board:

Quantity	Part No.	Description
2	UM-BEFE35	Base element with snap foot
2	UM-SE	Side element
4	UM-VS	Connection pin

AXIF

Universal interface board. Converts a 26-pin ribbon cable to 26 screw terminals for discrete wire. Mounts on AXRK-002 rack (standoffs, mounting hardware included). Use AXCA004 cable.

AVMEIF

VMEbus interface board, 32 inputs. Interfaces APB01 backpanel with a 26-pin ribbon cable to Acromag VME A/D boards.

Mounting Accessories

AXRK-002

19-inch metal rack for mounting the backpanels, power supplies, and universal interface board.

UM-BEFE 35

Base element with snap foot (for DIN rail mounting).

UM-BE 35

Base element without snap foot (for DIN rail mounting).

UM-SE

Side element (for DIN rail mounting).

UM-VS

Connection pin (for DIN rail mounting).

Miscellaneous Accessories

AXFS-003


Fuses for backpanel, 4 amp, package of 10.

AXJP-003

Jumper strap, package of 10 jumpers. Connects I/O modules to direct the output of any input module to the adjacent output module on the APB01 backpanel. The jumpers can also be used to configure I/O addresses on APB02 backpanel.

AXR1


Current conversion resistor (precision 20 ohm 0.1%) for A5B32 current input module. Sockets are provided on APB01/02.

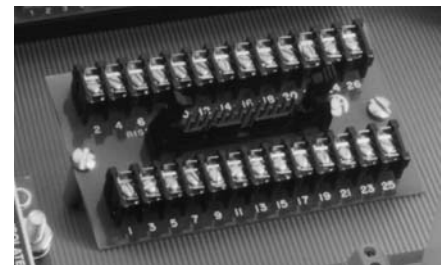


AXIF interface board




Dimensions

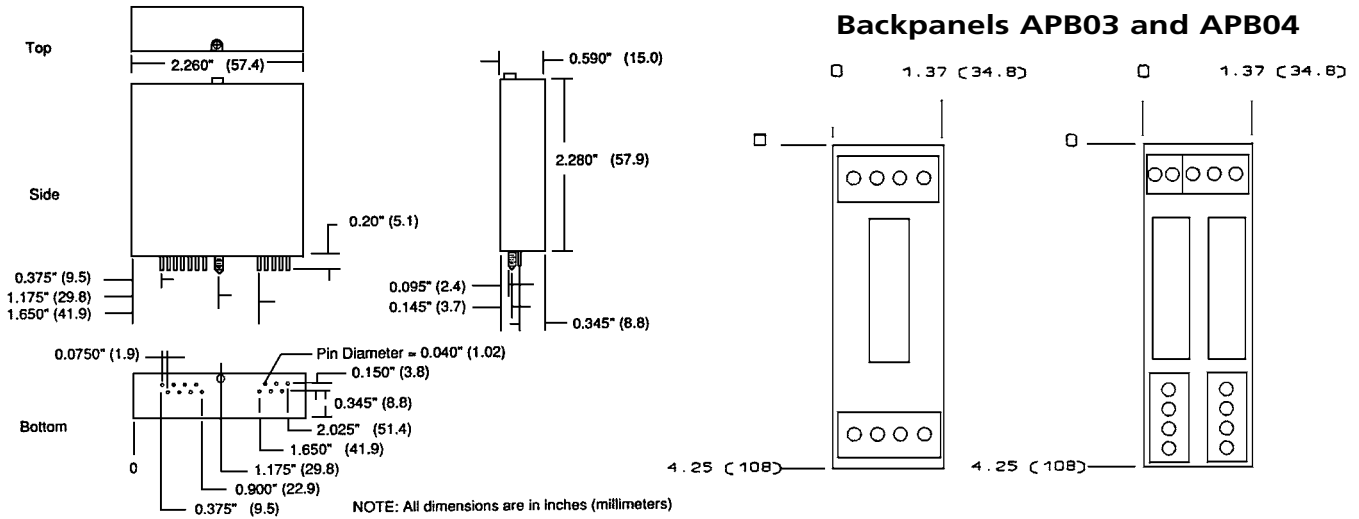

Backpanel APB01, APB02

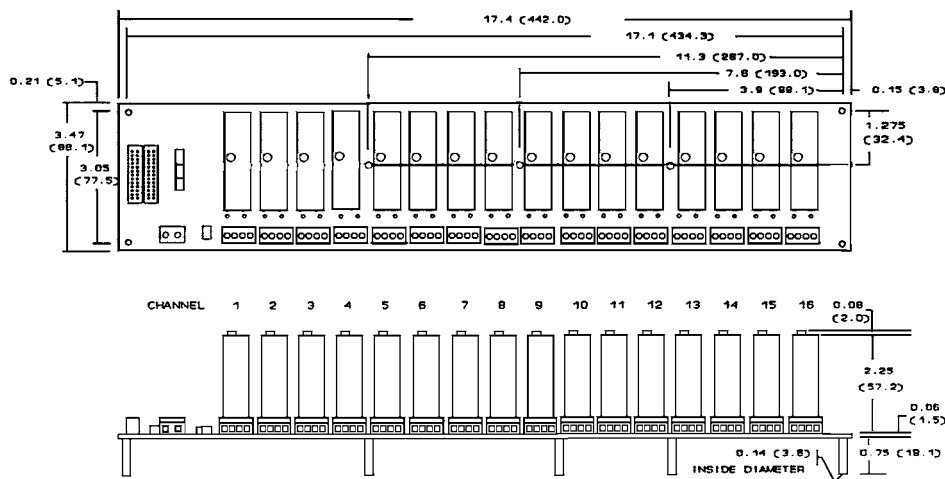

Rack Mount Kit AXRK-002

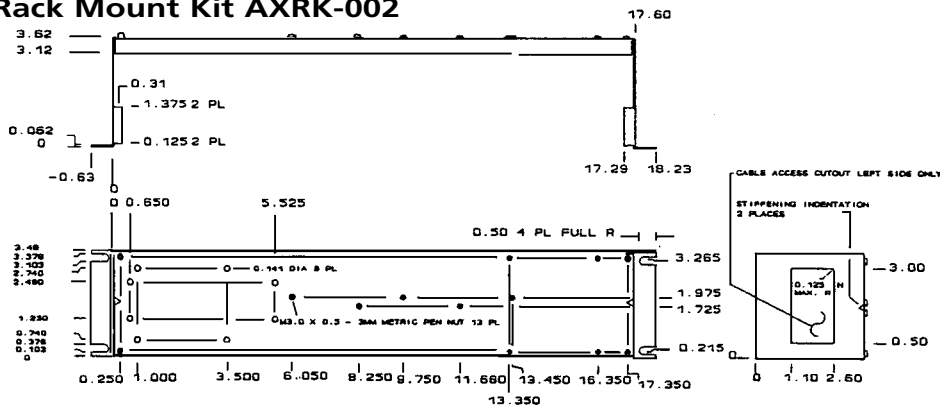


ASB Series




Dimensions


AXIF Outline Drawing

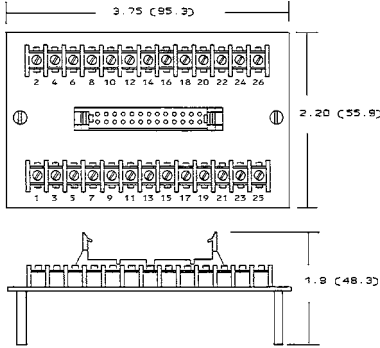

Digital I/O Panel APB16H-SSR

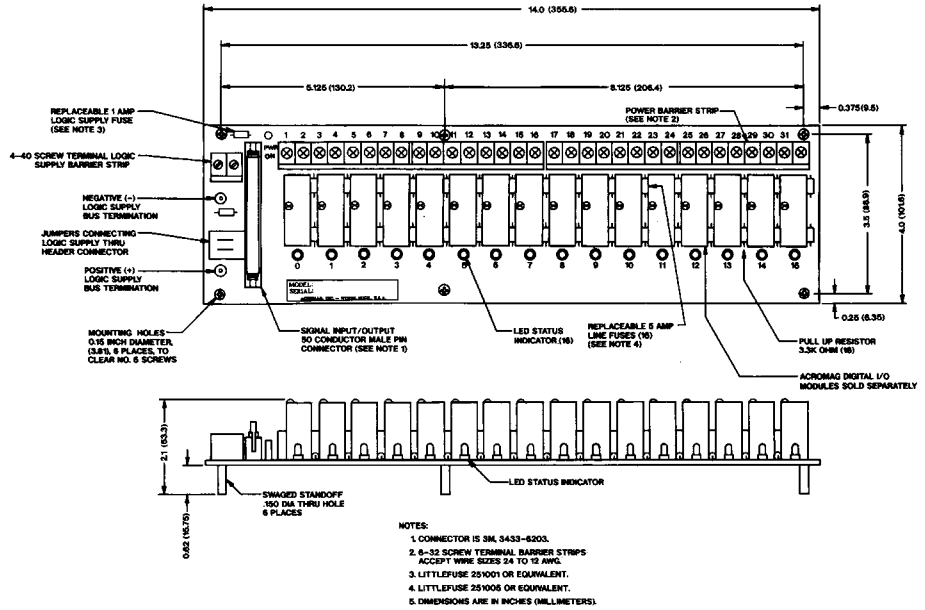

Power Supplies AXPRT-003 (115V) and AXPRE-003 (230V)

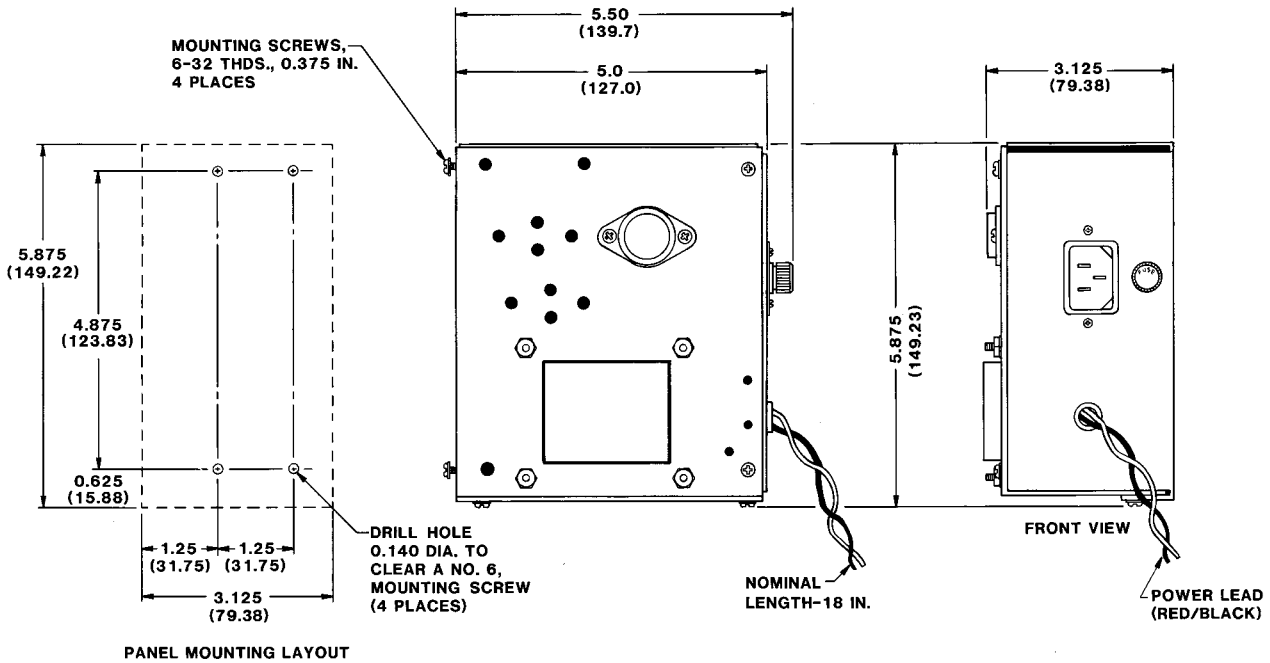

Dimensions are in inches (millimeters).