



Narrow Profile

DC-DC Converters (to 288 watts)

REGULATED

wide input ranges
single output

- Shipped Within 3 Days
- Five Year Warranty



Don't forget these facts about Acopian....

1. We ship within 3 Days (see our 3 Day Shipping Promise below).
2. Acopian power supplies last a *very long time*.
3. The Voltage Finder is the quickest way to find a power supply with the specs you need.
4. The Online System builder (www.acopian.com/SystemBuilder) is a convenient way to get your own custom Power System (and they ship within 9 Days).
5. You always talk to a real person when you call Acopian.
6. You can order your Acopian power supplies factory direct.
7. You can order your Acopian power supplies online.
8. All Acopian products are made in the USA.



Acopian Technical Company • Easton, PA
 1-800-523-9478 • www.acopian.com
 Order Factory Direct   
 Made in USA 



Narrow Profile DC-DC Converters (to 288 watts)

REGULATED

wide input ranges

single output

- Shipped Within 3 Days
- Five Year Warranty



These state-of-the-art DC-DC converters combine excellent regulation and ripple specifications with broad input ranges. They are available in a large selection of

STANDARD FEATURES

- Tight regulation, low ripple
- Extensive filtering and shielding
- Output status indicator
- Input/output isolation exceeds 2828Vdc
- Extruded aluminum case

SPECIFICATIONS

Nominal Input	Operating Input Voltage Range
24 Vdc	18-36 Vdc (or 18-75 Vdc; see table)
48 Vdc	36-75 Vdc (or 18-75 Vdc; see table)
125 Vdc	110-350 Vdc (see table)
250 Vdc	110-350 Vdc (see table)

Input Reverse Polarity Protection: Internal shunt diode (external fuse required).

Startup Time: 800 mS typical.

Regulation:

Line: $\pm 0.05\%$

Load: $\pm 0.05\%$

Output Voltage Remote Adjustment: The output voltage may be controlled by means of an external 1K potentiometer.

Output Indicator (DC out): Green LED.

Polarity: Output is floating and may be used in either polarity.

Drift: $\pm 0.1\%$ typical over 8 hours, after 30 minute warmup.

Temperature Coefficient: $\pm 0.02\%/^{\circ}\text{C}$ (Typical).

Transient Response: 300 μS to return to $\pm 1\%$ of output setting. Maximum of $\pm 3\%$ output excursion following a load step change from 50% to 100%.

Remote Sensing: Compensates up to 0.5 volt drop per output line, within the limits of the output voltage adjustment range.

output voltages and current ratings. Accessory mounting kits permit easy installation on a vertical panel, wall or on a DIN rail.

Overload/Short Circuit Protection: Current limiting with automatic recovery.

Overvoltage Protection:

Case sizes DN6A, DN6B: automatic reset.

Case sizes DN8, DN8A: latches power supply OFF, reset by momentarily removing DC input power.

Output Inhibit (DN8 and DN8A case sizes only):

Applying between +3 and +25 Vdc (relative to the -Out terminal) to the inhibit terminal will disable the supply.

EMI: Designed to meet FCC Part 15 and EN55022, Class A.

Thermal Protection:

Case sizes DN8, DN8A, DN6A: thermostat, self-resetting. Case size DN6B: inherently protected.

Efficiency: (Typical, at nominal input voltage, with full load.) 65 to 80%

Ambient Operating Temperature: 0 to +71°C.

Storage Temperature: -40 to +85°C.

Cooling: Case sizes DN8, DN8A, DN6A: forced-air cooled; air enters rear of power supply and exits from top. Case size DN6B: convection cooled.

Switching Frequency: 100 kHz (Typical).

Dielectric Withstand Voltage:

	inputs to 75 Vdc	110-350 Vdc input	Isolation
Input to output:	2828 Vdc	4242 Vdc	300 Vdc
Input to case:	2828 Vdc	2121 Vdc	300 Vdc
Output to case:	750 Vdc	750 Vdc	300 Vdc

Drawings: See page 80.

Mounting: Threaded mounting holes permit mounting to a chassis, cabinet wall or bracket. To mount from the power supply side of the mounting surface or for DIN rail mounting, see accessory Mounting Kits on page 91.

Narrow Profile DC-DC CONVERTERS

Nominal Output Voltage	Adjust Range ±V	Output Current Amps. at		Ripple mV (@ 25 MHz BW)		Case Size	18 to 36 Vdc Input		36 to 75 Vdc Input		18 to 75 Vdc Input		110 to 350 Vdc Input *	
		40°C	71°C	RMS	P-P		Price (\$)	Model	Price (\$)	Model	Price (\$)	Model	Price (\$)	Model
3.3	.5	10	7	10	50	DN6B	185	24C3.3FT1000	185	48C3.3FT1000	-----	-----	-----	-----
3.3	.5	15	10.5	10	50	DN6A	225	24C3.3FT1500	225	48C3.3FT1500	-----	-----	-----	-----
3.3	.5	18.5	12.9	10	50	DN8A	-----	-----	-----	-----	275	18-75C3.3NT1850	275	230C3.3NT1850
3.3	.5	25	17.5	10	50	DN8	-----	-----	-----	-----	-----	-----	350	230C3.3NT2500
5	.5	10	7	10	50	DN6B	185	24C5FT1000	185	48C5FT1000	-----	-----	-----	*
5	.5	15	10.5	10	50	DN6A	225	24C5FT1500	225	48C5FT1500	-----	-----	-----	-----
5	.5	18.5	12.9	10	50	DN8A	-----	-----	-----	-----	275	18-75C5NT1850	275	230C5NT1850
5	.5	25	17.5	10	50	DN8	-----	-----	-----	-----	-----	-----	350	230C5NT2500
6	.5	8.5	6	10	50	DN6B	185	24C6FT850	185	48C6FT850	-----	-----	-----	*
6	.5	12.5	8.6	10	50	DN6A	225	24C6FT1250	225	48C6FT1250	-----	-----	-----	-----
6	.5	15.4	10.7	10	50	DN8A	-----	-----	-----	-----	275	18-75C6NT1540	275	230C6NT1540
6	.5	24	16.8	10	50	DN8	-----	-----	-----	-----	-----	-----	350	230C6NT2400
7	.5	7	4.9	10	50	DN6B	185	24C7FT700	185	48C7FT700	-----	-----	-----	*
7	.5	10.6	7.4	10	50	DN6A	225	24C7FT1060	225	48C7FT1060	-----	-----	-----	-----
7	.5	15	10.5	10	50	DN8A	-----	-----	-----	-----	275	18-75C7NT1500	275	230C7NT1500
7	.5	23	16.1	10	50	DN8	-----	-----	-----	-----	-----	-----	350	230C7NT2300
8	.5	6	4.2	15	100	DN6B	185	24C8FT600	185	48C8FT600	-----	-----	-----	*
8	.5	9.4	6.6	15	100	DN6A	225	24C8FT940	225	48C8FT940	-----	-----	-----	-----
8	.5	14.7	10.3	15	100	DN8A	-----	-----	-----	-----	275	18-75C8NT1470	275	230C8NT1470
8	.5	23	16.1	15	100	DN8	-----	-----	-----	-----	-----	-----	350	230C8NT2300
9	.5	5.5	3.8	15	100	DN6B	185	24C9FT550	185	48C9FT550	-----	-----	-----	*
9	.5	9.3	6.5	15	100	DN6A	225	24C9FT930	225	48C9FT930	-----	-----	-----	-----
9	.5	14.4	10	15	100	DN8A	-----	-----	-----	-----	275	18-75C9NT1440	275	230C9NT1440
9	.5	23	16.1	15	100	DN8	-----	-----	-----	-----	-----	-----	350	230C9NT2300
10	.5	5	3.5	15	100	DN6B	185	24C10FT500	185	48C10FT500	-----	-----	-----	*
10	.5	9.2	6.4	15	100	DN6A	225	24C10FT920	225	48C10FT920	-----	-----	-----	-----
10	.5	14.1	9.8	15	100	DN8A	-----	-----	-----	-----	275	18-75C10NT1410	275	230C10NT1410
10	.5	22	15.4	15	100	DN8	-----	-----	-----	-----	-----	-----	350	230C10NT2200
12	.5	4.5	3.1	15	100	DN6B	185	24C12FT450	185	48C12FT450	-----	-----	-----	*
12	.5	9.1	6.3	15	100	DN6A	225	24C12FT910	225	48C12FT910	-----	-----	-----	-----
12	.5	13.7	9.6	15	100	DN8A	-----	-----	-----	-----	275	18-75C12NT1370	275	230C12NT1370
12	.5	22	15.4	15	100	DN8	-----	-----	-----	-----	-----	-----	350	230C12NT2200
13	.5	4.3	3	15	100	DN6B	185	24C13FT430	185	48C13FT430	-----	-----	-----	*
13	.5	8.1	5.6	15	100	DN6A	225	24C13FT810	225	48C13FT810	-----	-----	-----	-----
13	.5	12.3	8.6	15	100	DN8A	-----	-----	-----	-----	275	18-75C13NT1230	275	230C13NT1230
13	.5	20	14	15	100	DN8	-----	-----	-----	-----	-----	-----	350	230C13NT2000
14	.5	4.2	3	15	100	DN6B	185	24C14FT420	185	48C14FT420	-----	-----	-----	*
14	.5	7.7	5.4	15	100	DN6A	225	24C14FT770	225	48C14FT770	-----	-----	-----	-----
14	.5	11.7	8.2	15	100	DN8A	-----	-----	-----	-----	275	18-75C14NT1170	275	230C14NT1170
14	.5	19	13.3	15	100	DN8	-----	-----	-----	-----	-----	-----	350	230C14NT1900
15	.5	4	2.8	15	100	DN6B	185	24C15FT400	185	48C15FT400	-----	-----	-----	*
15	.5	7.4	5.2	15	100	DN6A	225	24C15FT740	225	48C15FT740	-----	-----	-----	-----
15	.5	11.1	7.8	15	100	DN8A	-----	-----	-----	-----	275	18-75C15NT1110	275	230C15NT1110
15	.5	18	12.6	15	100	DN8	-----	-----	-----	-----	-----	-----	350	230C15NT1800
18	.5	3.3	2.3	15	100	DN6B	185	24C18FT330	185	48C18FT330	-----	-----	-----	*
18	.5	6	4.2	15	100	DN6A	225	24C18FT600	225	48C18FT600	-----	-----	-----	-----
18	.5	9.2	6.4	15	100	DN8A	-----	-----	-----	-----	275	18-75C18NT920	275	230C18NT920
18	.5	15	10.5	15	100	DN8	-----	-----	-----	-----	-----	-----	350	230C18NT1500
20	.5	3	2.1	15	100	DN6B	185	24C20FT300	185	48C20FT300	-----	-----	-----	*
20	.5	5.6	3.9	15	100	DN6A	225	24C20FT560	225	48C20FT560	-----	-----	-----	-----
20	.5	8.6	6	15	100	DN8A	-----	-----	-----	-----	275	18-75C20NT860	275	230C20NT860
20	.5	14	9.8	15	100	DN8	-----	-----	-----	-----	-----	-----	350	230C20NT1400
24	.5	2.5	1.8	15	100	DN6B	185	24C24FT250	185	48C24FT250	-----	-----	-----	*
24	.5	5	3.5	15	100	DN6A	225	24C24FT500	225	48C24FT500	-----	-----	-----	-----
24	.5	7.5	5.3	15	100	DN8A	-----	-----	-----	-----	275	18-75C24NT750	275	230C24NT750
24	.5	12	8.4	15	100	DN8	-----	-----	-----	-----	-----	-----	350	230C24NT1200
25	.5	2.4	1.6	15	100	DN6B	185	24C25FT240	185	48C25FT240	-----	-----	-----	*
25	.5	4.8	3.3	15	100	DN6A	225	24C25FT480	225	48C25FT480	-----	-----	-----	-----
25	.5	7.2	5	15	100	DN8A	-----	-----	-----	-----	275	18-75C25NT720	275	230C25NT720
25	.5	11.2	7.8	15	100	DN8	-----	-----	-----	-----	-----	-----	350	230C25NT1120
28	.5	2.1	1.5	15	100	DN6B	185	24C28FT210	185	48C28FT210	-----	-----	-----	*
28	.5	4.2	2.9	15	100	DN6A	225	24C28FT420	225	48C28FT420	-----	-----	-----	-----
28	.5	6.2	4.3	15	100	DN8A	-----	-----	-----	-----	275	18-75C28NT620	275	230C28NT620
28	.5	10	7	15	100	DN8	-----	-----	-----	-----	-----	-----	350	230C28NT1000
30	.5	2	1.4	25	150	DN6B	185	24C30FT200	185	48C30FT200	-----	-----	-----	*
30	.5	4	2.8	25	150	DN6A	225	24C30FT400	225	48C30FT400	-----	-----	-----	-----
30	.5	5.6	3.9	25	150	DN8A	-----	-----	-----	-----	275	18-75C30NT560	275	230C30NT560
30	.5	9	6.3	25	150	DN8	-----	-----	-----	-----	-----	-----	350	230C30NT900
32	1	1.9	1.3	25	150	DN6B	185	24C32FT190	185	48C32FT190	-----	-----	-----	*
32	1	3.7	2.5	25	150	DN6A	225	24C32FT370	225	48C32FT370	-----	-----	-----	-----
32	1	5.4	3.7	25	150	DN8A	-----	-----	-----	-----	275	18-75C32NT540	275	230C32NT540
32	1	8.6	6	25	150	DN8	-----	-----	-----	-----	-----	-----	350	230C32NT860
36	1	1.7	1.2	25	150	DN6B	185	24C36FT170	185	48C36FT170	-----	-----	-----	*
36	1	3.3	2.3	25	150	DN6A	225	24C36FT330	225	48C36FT330	-----	-----	-----	-----
36	1	5	3.5	25	150	DN8A	-----	-----	-----	-----	275	18-75C36NT500	275	230C36NT500
36	1	8	5.6	25	150	DN8	-----	-----	-----	-----	-----	-----	350	230C36NT800
40	1	1.5	1	25	150	DN6B	185	24C40FT150	185	48C40FT150	-----	-----	-----	*
40	1	3	2.1	25	150	DN6A	225	24C40FT300	225	48C40FT300	-----	-----	-----	-----
40	1	4.3	3	25	150	DN8A	-----	-----	-----	-----	275	18-75C40NT430	275	230C40NT430
40	1	7	4.9	25	150	DN8	-----	-----	-----	-----	-----	-----	350	230C40NT700
48	1	1.2	.8	25	150	DN6B	185	24C48FT120	185	48C48FT120	-----	-----	-----	*
48	1	2.5	1.7	25	150	DN6A	225	24C48FT250	225	48C48FT250	-----	-----	-----	-----
48	1	3.7	2.6	25	150	DN8A	-----	-----	-----	-----	275	18-75C48NT370	275	230C48NT370
48	1	6	4.2	25	150	DN8	-----	-----	-----	-----	-----	-----	350	230C48NT600



50 to 125


See next page!

* See pages 38-39 for information on Mini Switching Power Supplies that will operate on a 120-180 Vdc input and provide 30 and 50 watt DC outputs.

Narrow Profile DC-DC CONVERTERS (continued)


Nominal Output Voltage	Adjust Range ±V	Output Current Amps. at		Ripple mV (@ 25 MHz BW)		Case Size	18 to 36 Vdc Input		36 to 75 Vdc Input		18 to 75 Vdc Input		110 to 350 Vdc Input	
		40°C	71°C	RMS	P-P		Price (\$)	Model	Price (\$)	Model	Price (\$)	Model	Price (\$)	Model
50	1	3.3	2.3	50	150	DN8A	-----	-----	-----	-----	-----	-----	275	230C50NT330
50	1	5	3.5	50	150	DN8	-----	-----	-----	-----	-----	-----	350	230C50NT500
55	1	3	2.1	50	150	DN8A	-----	-----	-----	-----	-----	-----	275	230C55NT300
55	1	4.5	3.2	50	150	DN8	-----	-----	-----	-----	-----	-----	350	230C55NT450
60	1	2.8	1.9	50	150	DN8A	-----	-----	-----	-----	-----	-----	275	230C60NT280
60	1	4.2	2.9	50	150	DN8	-----	-----	-----	-----	-----	-----	350	230C60NT420
70	1	2.4	1.7	67	200	DN8A	-----	-----	-----	-----	-----	-----	275	230C70NT240
70	1	3.6	2.5	67	200	DN8	-----	-----	-----	-----	-----	-----	350	230C70NT360
75	1	2.2	1.5	67	200	DN8A	-----	-----	-----	-----	-----	-----	275	230C75NT220
75	1	3.3	2.3	67	200	DN8	-----	-----	-----	-----	-----	-----	350	230C75NT330
80	1	2.1	1.4	67	200	DN8A	-----	-----	-----	-----	-----	-----	275	230C80NT210
80	1	3.1	2.2	67	200	DN8	-----	-----	-----	-----	-----	-----	350	230C80NT310
90	1	1.8	1.3	100	300	DN8A	-----	-----	-----	-----	-----	-----	275	230C90NT180
90	1	2.8	1.9	100	300	DN8	-----	-----	-----	-----	-----	-----	350	230C90NT280
100	1	1.7	1.2	150	450	DN8A	-----	-----	-----	-----	-----	-----	275	230C100NT170
100	1	2.5	1.8	150	450	DN8	-----	-----	-----	-----	-----	-----	350	230C100NT250
110	1	1.5	1.1	150	450	DN8A	-----	-----	-----	-----	-----	-----	275	230C110NT150
110	1	2.3	1.6	150	450	DN8	-----	-----	-----	-----	-----	-----	350	230C110NT230
120	1	1.4	1	150	450	DN8A	-----	-----	-----	-----	-----	-----	275	230C120NT140
120	1	2.1	1.5	150	450	DN8	-----	-----	-----	-----	-----	-----	350	230C120NT210
125	1	1.3	0.9	150	450	DN8A	-----	-----	-----	-----	-----	-----	275	230C125NT130
125	1	2	1.4	150	450	DN8	-----	-----	-----	-----	-----	-----	350	230C125NT200

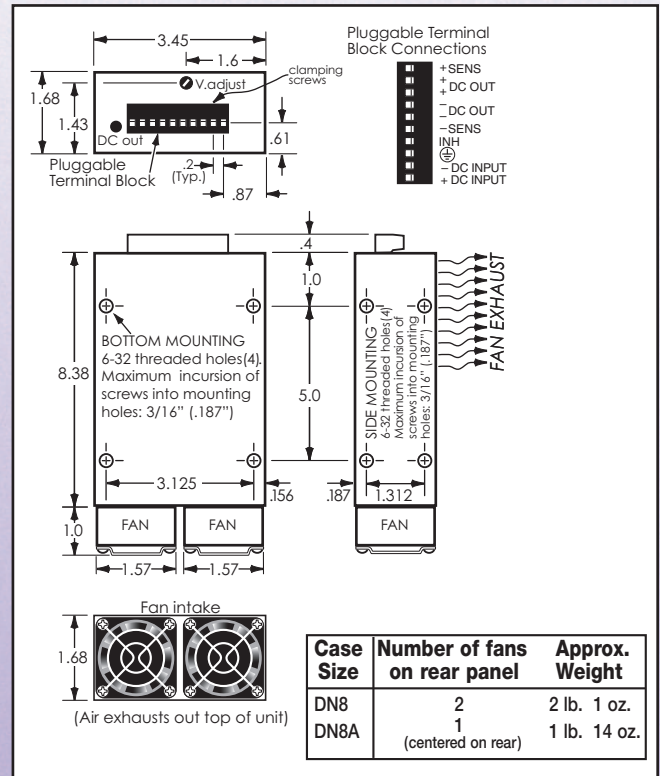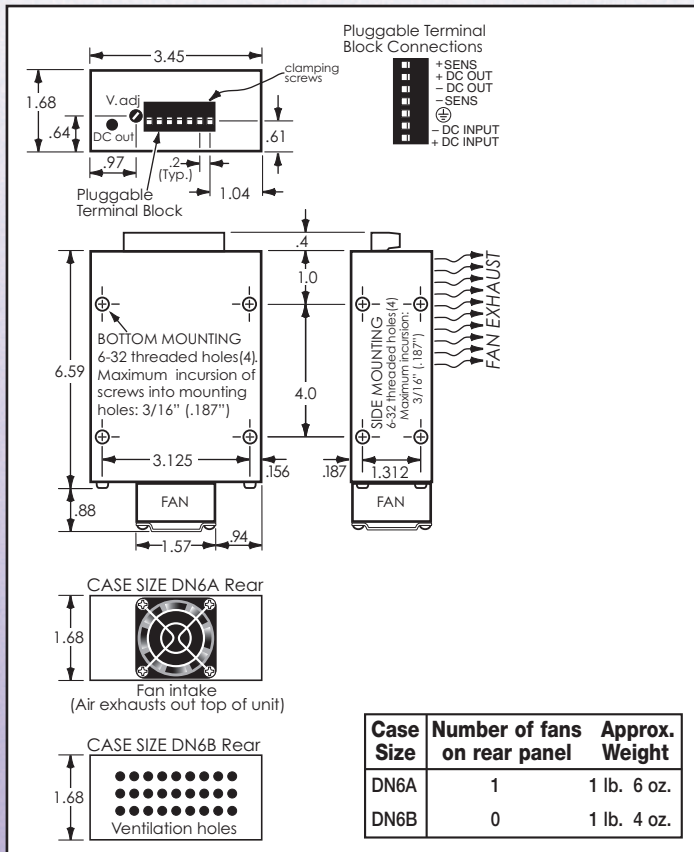



WALL MOUNTING KITS ...\$10

These kits provide a way of mounting power supplies on a wall or panel when the other side of the mounting surface is inaccessible. Each kit consists of four aluminum brackets and four machine screws for fastening them to the power supply, effectively adding mounting flanges to the power supply.




For Gold Box and modular High Voltage power supplies:

GB8 Mounting Kit (#8-32 mounting holes)

Can be used on these case sizes:

CM6, CM9, CM13, CH11, CH16, DG5, DG6, DG9, G3, G5, G5D, G6, G9, G13, GT5, GT6, GT9, GT13, H8, H11, H16, HD345, HD355, HA349, HA359, HT11, HT16, M6, M9, M13, RM6, RW6 TG5, TG6, TG9, TG13, TH11, WG7, WM6, WM9, Y3, Y5, Y6, YH11, YA



For Narrow Profile power supplies:

NP6 Mounting Kit (#6-32 mounting holes)

Can be used on these case sizes:


AMC, CN8T, DN6B, DN6A, DN8A, DN8, F6T, F8T, N8T, WL9, WN6A, WN6B, WN8, WN8A, TN6T

NP6L Mounting Kit (#6-32 mounting holes)

Model NP6L consists of two brackets 1.5" long as shown above, and two 2.5" long brackets (to extend beyond heat sink).

Can be used on these case sizes:

CN8H, N8H, TN8H




DIN RAIL MOUNTING KITS ...\$15

NPH35DIN Mounting Kit (Horizontal mounting)

Can be used on these case sizes:

CN8H	DN6A	F6T	N8H	TN6T	WN6A
CN8T	DN6B	F8T	N8T	TN8H	WN6B
	DN8				WN8
	DN8A				WN8A




GR35DIN Mounting Kit (Rear mounting)

Can be used on these case sizes:

CM6	DG5	G3	GT5	HD345	M6	RM6	TG5	Y3
CM9	DG6	G5	GT6	HD355	M9	RW6	TG6	Y5
	DG9	G5D	GT9				TG9	Y6
		G6						
		G9						

(Can be used, but not recommended on case sizes: G13, GT13, M13, TG13)



NPV35DIN Mounting Kit (Vertical mounting)

Can be used on these case sizes:


CN8H	DN6A	F6T	N8H	TN6T	WN6A
CN8T	DN6B	F8T	N8T	TN8H	WN6B
	DN8				WN8
	DN8A				WN8A



GH35DIN Mounting Kit (Horizontal mounting)

Can be used on these case sizes:

CM6	DG5	G3	GT5	M6	TG5	Y3
CM9	DG6	G5	GT6	M9	TG6	Y5
CM13	DG9	G5D	GT9	M13	TG9	Y6
		G6	GT13		TG13	
		G9				
		G13				





WL35DIN Mounting Kit (Vertical mounting)

Can be used on these case sizes: WL7, WL9

NPR35DIN Mounting Kit (Rear mounting)

Can be used on these case sizes:

CN8H	F6T	N8H	TN6T
CN8T	F8T	N8T	TN8H



WLH35DIN Mounting Kit (Horizontal mounting)

Can be used on these case sizes: WL7, WL9


CH35DIN Mounting Kit (Horizontal mounting)

Can be used on these case sizes: RM6, RW6

WH35DIN Mounting Kit (Horizontal mounting)

Can be used on these case sizes: WM6, WM9



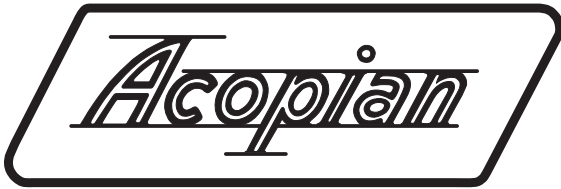

About Acopian's 3 Day Shipment Guarantee:

In 1964, Acopian initiated its "3 Day Shipping Guarantee." Since then our product offerings have expanded to include many more lines of power supplies that ship within 3 Days as well as others that ship within 6 or 9 Days. These guarantees apply to every model in the Acopian catalog.

Our unique 3-day shipping guarantee has prompted many questions. Below are some of those most often asked:

What does Acopian's 3-day shipping promise mean?

It means that power modules listed in this catalog are shipped within 3 days after we receive your order. High Voltage, Redundant, Rack Mounting, Systems and certain Switching power supplies are shipped within 9 days.

Has Acopian ever failed to meet this promise?

Never.

Do options affect shipping time?

The 230 volt input option and moisture/fungus-proofing option require two additional days. All other options do not affect shipping time.

Is the 3-day promise affected by quantity? Suppose we need 50 or 100 pieces?

The 3-day promise applies to orders for five or less modules. (Two or less for 9-day items). If requested, Acopian will ship five pieces of a larger order in 3 days and, with consideration of your requirement, schedule the balance. (Since each shipment is processed and priced as a separate order, for lowest prices request shipment in one lot.)

What if I need four or five different models? Does the 3-day promise still apply?

Yes. Guaranteed 3-day shipment applies to one model or to a combination of models.

Do I have to ask for 3-day shipment of my order?

3-day shipment is automatic. In fact, you must tell us if you want the shipment delayed.

How long after you ship will I have the power supplies?

Transportation time varies with the carrier used. Unless otherwise requested, Acopian ships small orders by UPS Ground.

You say Acopian has never failed to meet the 3-day promise. How do you do it?

Our facilities have been designed and equipped to meet our 3-day shipment promise. When your order is received, your power supplies are built specifically for you and shipped within three days. We do not ship from stock. (For this reason, we are unable to accept returns for credit.)

I've seen other power supply manufacturers advertise "same-day shipment." Isn't that better than 3-day shipment?

A typical vendor's "same-day shipment" advertisement can only be fulfilled if the power supplies you need are in stock. Otherwise, a four to six week delay is not unusual before inventory is replenished and your order is shipped.

Acopian's 3-day shipment promise applies to ALL 3 Day models (larger units ship within 9 Days) and is not dependent on the quantity in stock. We build each unit after the order for that unit is received. If an order is needed faster, often times we can ship in less than 3 days.

If you require shipment even earlier than our standard promise, just let us know, we can usually ship sooner. We welcome the opportunity to work with you.

ACOPIAN...

...answers your phone call with a live salesperson

No automated menus. The person who answers your call will courteously and promptly answer your questions, quote price and delivery, expedite your urgent requirements, and offer you immediate access to our engineers.

Call toll free 800-523-9478.

...can customize power supplies for you

If a standard power supply does not meet all of your requirements, speak with one of our engineers. We can often modify the specifications, ratings and configuration of a supply. We can also combine several power supplies into a Multiple Output Power System with the operating features you specify (such as meters and switches) and ship it within 9 Days!

...has a 5-year warranty

This is typical: One of our customers sent us an old power supply with a note indicating that the supply had been in continuous use since 1972 (33 years!), but he had recently noticed that the output voltage was low. We found that the capacitors had dried up, replaced them and returned the supply to the customer, who thanked us and said he intends to keep using it. We focus on making power supplies that will last a long time. There are power supplies that cost less than ours, or that are smaller than ours, but you won't find any that last longer than ours. All too often, low-priced supplies are densely packed, run hot, have short lifetimes and short warranties. All Acopian metal-cased power products have a 5-year warranty, but you can expect them to last a lot longer.

Purchase Acopian... 3-day shipment, long lasting power supplies, and unsurpassed customer service.

"In my business, Acopian is referred to as bulletproof. It never fails and lasts forever."

- Steve Andrews, President
Technical Options, Inc.

"If Acopian made automobiles, I'd buy one without question."

- David A. Price, Research Technologist
Georgia Tech Research Institute

ORDERING INFORMATION & Terms and Conditions

ACOPIAN SELLS FACTORY DIRECT WORLDWIDE: We do not use representatives or distributors. Contact Acopian for technical information or a quote.

WARRANTY: Acopian power supplies are warranted to be free from defects in material and workmanship for a period of five years (encapsulated devices, for one year) from date of original shipment. Acopian's obligation under this warranty is limited to repairing any power supply returned to the factory Service Department in Easton, PA and replacing any defective parts. Mini Encapsulated power supplies are not repairable. Authorization must be obtained from Acopian before a power supply may be returned for repair. Units must be well packed when shipping to Acopian; the repair of any damage incurred during shipment will be charged. Transportation charges are to be paid by the purchaser. A reinspection and handling charge will be applied to returned units found to have no defects. If a failure has been caused by misuse, operation in excess of specifications, or modification by the customer, repairs will be billed at cost; in such cases, a cost estimate will be submitted before work is started.

Acopian reserves the right to make changes or improvements in its products without incurring any obligation to install the same on products previously manufactured.

This warranty is in lieu of all other warranties, obligations, and liabilities, expressed or implied, and is the purchaser's exclusive remedy. Acopian makes no warranty, either express or implied, of merchantability, fitness for a particular purpose or otherwise. In no event shall Acopian be liable whether in contract, tort, or negligence, for special, indirect, incidental or consequential damages of any kind, including loss of business or profits, or any other losses incurred by the purchaser or any third party, the Customer's remedies being limited, at Acopian's option, to replacement, repair or credit at the price on the date of claim.

The validity, performance and construction of all terms and conditions and any sale made by Acopian shall be determined by the law of Pennsylvania, without regard to its conflict of law principles, and all parties to the transaction expressly consent to the jurisdiction of such courts and consent to the venue of the Court of Common Pleas for Northampton County, Pennsylvania.

PRICES: The prices shown are F.O.B. our factory; Easton, PA. or Melbourne, FL.. All prices and specifications are subject to change without notice. Minimum order is \$50.00.

TERMS: Net 30 days, subject to credit approval. Visa, MasterCard and American Express also accepted.

SHIPPING: Location permitting, small shipments are made by United Parcel Service, or by Parcel Post; larger shipments, by insured motor freight collect. Shipments can be made by air upon request. Risk of loss shall be F.O.B. Our Factory, even in cases where freight may be prepaid or allowed to destination by Acopian. If equipment is received in damaged condition, it is the customer's responsibility to contact the carrier and file a claim for damages.

TIME FOR DELIVERY: The time for delivery quoted by Acopian is the time required to ship from our plants. We will not be liable for delays in delivery caused by any reason beyond our control, including but not limited to acts of God, casualty, civil disturbance, labor disputes, transportation or supply difficulties, or any interruption of our facilities, and the quoted time for delivery shall be extended during the continuance of such conditions and for a reasonable time thereafter. In no event will Acopian be liable for any premium transportation, procurement, or similar costs incurred by the Customer as a result of conditions beyond Acopian's control resulting in Acopian's inability to deliver product in accordance with customer's requested delivery schedules.

QUANTITY DISCOUNTS: Discounts are available to quantity buyers and are dependent upon the order quantity and the manufacturing scheduling anticipated by the order, and apply only to the quantity and delivery ordered. Partial shipments are considered as separate orders for discounting purposes.

EXPORT ORDERS: A minimum export documentation charge of \$60.00 applies. (A minimum charge of \$25.00 applies on orders requiring customs forms for Canadian orders and for orders to certain U.S. territories.)

MOISTURE/FUNGUS PROOFING: Power supplies can be furnished with a moisture and fungus resistant varnish applied to interior surfaces. To order, add the suffix letter F to the model number. The additional cost is \$25.00 per output and requires two additional days. Not available on High Voltage, Mini Encapsulated, Rack Mounting, and Gold Box Switching models.

TAGGING: Maximum of 15 characters/spaces. Add \$10.00 to price.

TEST DATA: Cost, \$35.00 or 2% of order, whichever is greater.

SPECIAL MODELS/MODIFICATIONS: Cataloged models can be altered at the factory to meet special requirements. Contact the Applications Engineering Department to discuss your needs.

PARTS: The designs used in Acopian power supplies utilize standard components to the greatest practical extent. When replacements are required, the types originally used, or their equivalents, can usually be obtained most quickly from a local electronic components distributor.

Special components, such as transformers, are stocked at the factory warehouses. Contact the Applications Engineering Department for information on the parts required, referencing the model number of the power supply, the circuit designation of the component, and a description.

PURCHASE ORDER ACCEPTANCE: Orders are accepted subject to Acopian's Terms and Conditions. Any Terms and Conditions of any Purchaser's order, agreement, or understanding which are in addition to or inconsistent with Acopian's shall not be binding upon Acopian unless made in writing and accepted over the signature of an authorized officer of Acopian. Orders shall not be considered accepted until entered into production at our plant. Acopian reserves the right to refuse any order. All typographical and clerical errors are subject to correction by Acopian.

RETURNED GOODS: Acopian products are built on a per-order basis, and ordinarily no credit can be extended for their return. No goods will be accepted for return unless authorized in writing by Acopian.

CHANGES: The customer may, by a written notice, request changes within the general scope of the order, in the drawings, designs or specifications; method of shipment; and place of delivery. If any such change causes an increase or decrease in the cost, or the time required for the processing of any part of the order, an equitable adjustment shall be made in the price or delivery schedule, or both, and the order shall be modified in writing accordingly.

CANCELLATION: Suspension or cancellation of orders may be made only upon our written approval and on terms that will indemnify us against all loss.

OVERTIME: It is anticipated that any order will be processed during regular working hours on regular working days. If for any reason the Purchaser requests Acopian to process the order, or any portion of it, outside of such regular working hours, any overtime or other additional expense occasioned thereby shall be billed to and paid by the Purchaser as an extra cost. Acopian reserves the right to decline to process the order outside regular working hours.

CUSTOMER DELAY OF WORK: If the performance of all or any part of the work is delayed or interrupted by Customer's failure to act within the time specified (or within a reasonable time if no time is specified) and such act is not expressed or implied by the order, an adjustment shall be made in the cost of performance of the order caused by such delay or interruption and the order modified in writing accordingly. Adjustment will also be made in the delivery or performance dates and any other contractual provisions affected by such delay or interruption.

GOVERNMENT SPECIFICATIONS: Pricing is based upon industrial-grade construction, marking, packing, and packaging. Exception is taken to any MIL specifications, and to any requirements for the use of special forms, documentation other than quoted, and Government Source Inspection. Acopian must decline to quote on any other basis.

APPLICATIONS ASSISTANCE: *Questions regarding the specifications, features, and use of any Acopian product should be directed to the Applications Engineering Department. A staff of power supply specialists will be pleased to assist you.*

www.acopian.com - Online Ordering and Instant Quotes Online!



Since 1957

Acopian Technical Company
P.O. Box 638, Easton, PA 18044 • Phone: (610) 258-5441 • FAX: (610) 258-2842
Call toll free: (800) 523-9478 (International: Country Code 01)

ALL ACOPIAN
POWER SUPPLIES
MADE IN U.S.A.

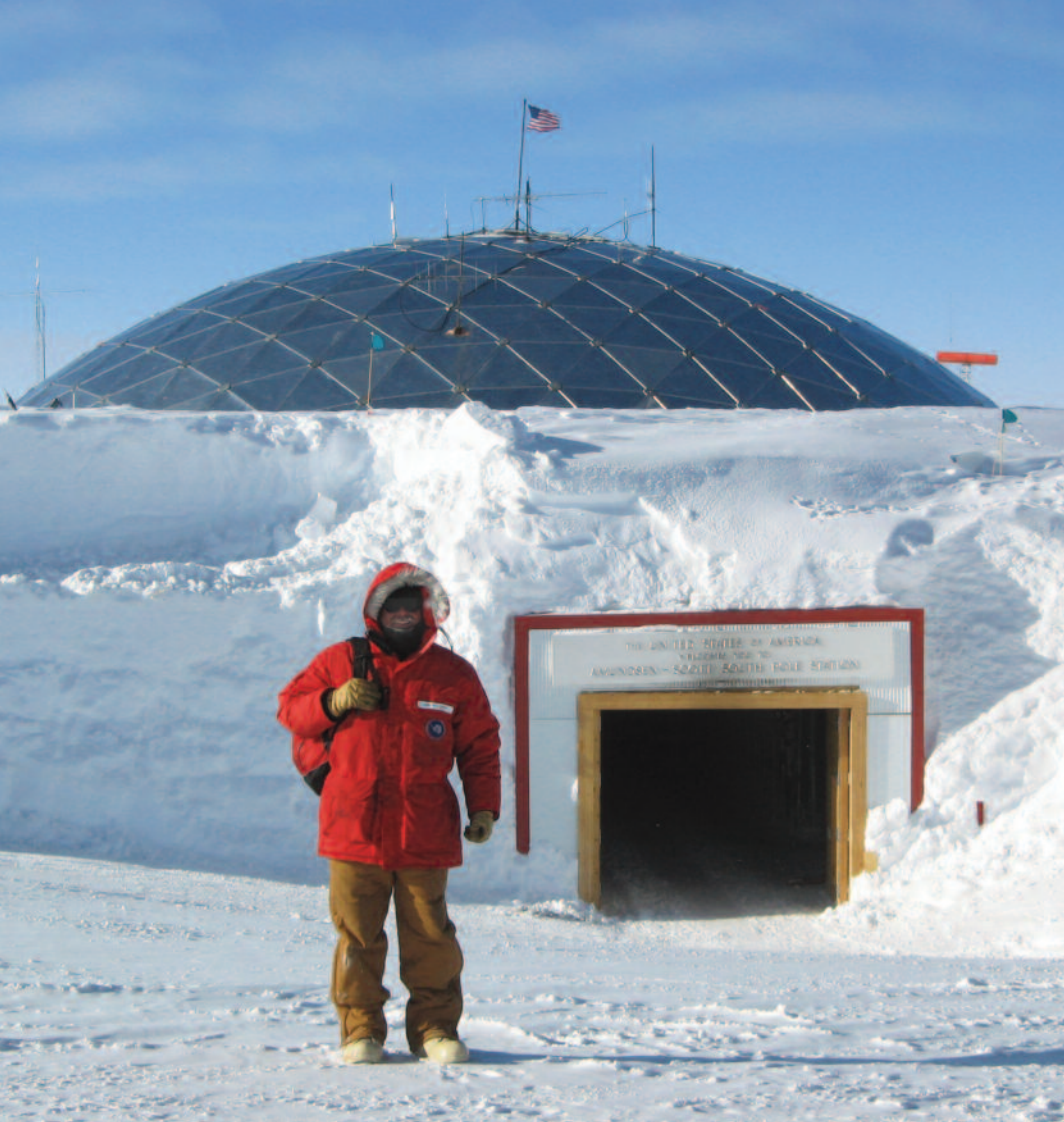


PHOTO COURTESY OF THE ICECUBE PROJECT

“At Project IceCube, it’s absolutely critical to have a good power supply. The ice must be as pure and clear as possible. If the power to the ice top sensor system were to fail, we would risk the tank water freezing without being controlled, resulting in bubbles and impurities, and very much reducing the quality of ice and quality of information that we can see with our detectors. We chose Acopian power supplies to power our pumping and degassing systems because of their reputation for reliability. The people at Acopian met all of our highly demanding specifications and, despite very little time until our window to ship to the Pole, they met our schedule. We were 100% satisfied.”


Jim Baccus
Cable System Manager
Project IceCube

(the international high-energy neutrino observatory being built and installed in the ice below South Pole Station)

The world’s most demanding environments demand Acopian power systems.

Design your own Acopian power system online with the System Builder at www.acopian.com. Simply enter your requirements, and you’ll receive a quotation for fully wired multiple-output power systems, without the need for you to prepare mechanical layouts or search through a power supply catalog.

Each system will be completely wired, tested and shipped within 9 days after receipt of the order. Choose Acopian – the power supplies of choice for the world’s leading engineers.

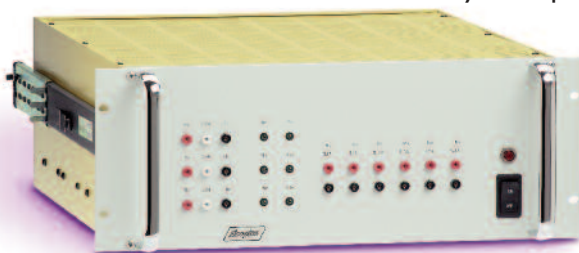

ALL ACOPIAN POWER SUPPLIES
MADE IN U.S.A.



Acopian Technical Company

1-800-523-9478 • www.acopian.com