




## FX815ELT-LF

Intel® Pentium® III / Celeron® Mini ITX

### Features

- Intel® Pentium® III / Celeron® PGA 370 Socket with 66/100/133 MHz FSB
- Intel® 82815E GMCH Chipset
- Two DIMMs up to 512 MB Non ECC Memory
- ADI AD1885 AC'97 support 2 CH Audio
- Intel® 82562ET 10/100 Mbps LAN
- TV-out
- 2 x COM, 4 x USB, 2 x IEEE 1394
- 1 x PCI
- Mini ITX Form Factor (6.75" x 7.25")
- RoHS Compliant

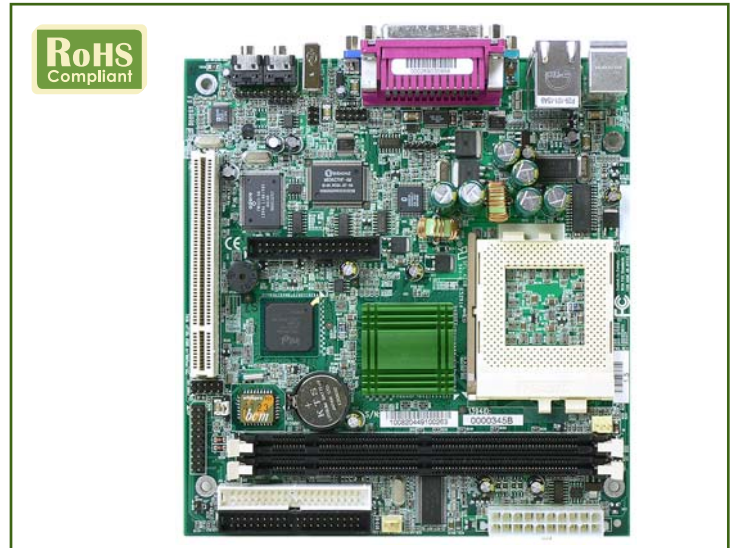

**RoHS**  
Compliant

### Specifications

#### System

CPU	Intel® Pentium® III / Celeron® PGA 370 Socket 66/100/133MHz FSB
Core Logic Chipsets	Intel® 82815E GMCH + Intel® 82801BA ICH2
System Memory	Two 168-pin DIMM sockets support up to 512 MB Non ECC
BIOS	Whizpro 4MB FWH BIOS
Expansion Interface	1 x 32-bit PCI Slot
Additional Features	Power Management APM version 1.2 WOL (Wake On LAN) and WOR (Wake On Ring)

#### I/O

MIO	1 x PS/2 Mouse/KB, 2 x IDE, 1 x LPT
USB	2 x USB 1.1 ports (Rear I/O), 2 x USB pin headers for additional 2 USB
COM Port	1 x RS232 for COM1 (Rear I/O), 1 x RS232 pin headers for COM2
IEEE 1394	2 x IEEE1394 Ports
IrDA	1 x IrDA Tx/Rx Header


#### Display

Chipset	Intel® 82815E GMCH
Resolution	CRT Mode: Up to 1600 x 1200 @ 8bpp
VGA/LCD Interface	1 x DB-15
TV-out	Support both S-Video and Composite Video

#### Audio

AC'97 Codec	ADI AD1885 support 2 Channel Audio
Audio Interface	Line-Out, Mic-In and CD Audio-In

- TV-out
- 2 x IEEE 1394
- 2 COM
- WOL
- WOR

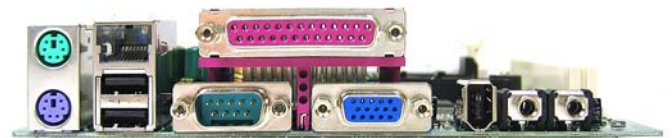

#### Ethernet

LAN 1	Intel® 82562ET 100Base-Tx Fast Ethernet
-------	---

#### Mechanical and Environment

Power Supply Voltage	+3.3 V, +5 V, +12 V, +5 VSB, -5 V
Power Type	ATX
Operating Temperature	0° C to 60° C
Operating Humidity	-20° C to 80°
Form Factor	Flex ATX
Dimensions	6.75" (L) x 7.25" (W)
Weight	0.8 lbs

#### Ordering Information

Part Number	Description
FX815ELT-LF	FX815ELT RoHS replacement - Intel® 815E chipset, PGA 370 Socket, 1 10/100 LAN, TV-Out, IEEE 1394, 1 PCI, 2 COM, 4 USB

\* All product specifications are subject to change without notice. Last update: 05/18/07