

320W Single Output Switching Power Supply

HLG-320H series

Features :

- Universal AC input / Full range (up to 305VAC)

· Built-in active PFC function

- High efficiency up to 95%
- · Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- · OCP point adjustable through output cable or internal potentiometer
- · IP67 / IP65 design for indoor or outdoor installations
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- · Suitable for LED lighting and street lighting applications
- · Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet location
- 5 years warranty (Note.10)

24	
TAIWAN Excellence 2011	80

₩ W SELV IP65 IP67 🕞 c¶us 🛎 🖬 🕰 CBCE \F/ 110/ 7)

HLG-320H-12 A Blank : IP67 rated. Cable for I/O connection.


- A : IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B : IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or PWM signal or resistance.
- C : Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal potentiometer.
- D (option) : IP67 rated. Timer dimming function, contact MEAN WELL for details.

SPECIFICATION

ATED CURRENT ATED POWER PPLE & NOISE (max.) Note.2 DLTAGE ADJ. RANGE Note.6 JRRENT ADJ. RANGE DLTAGE TOLERANCE Note.3 NE REGULATION AD REGULATION	10.8 ~ 13.5V Can be adjust 11 ~ 22A ±3.0%		20V 10 ~ 20V 15A 300W 150mVp-p 17 ~ 22V	HLG-320H-24 24V 12 ~ 24V 13.34A 320.16W 150mVp-p	HLG-320H-30 30V 15 ~ 30V 10.7A 321W	HLG-320H-36 36V 18 ~ 36V 8.9A 320.4W	HLG-320H-42 42V 21~42V 7.65A	HLG-320H-48 48V 24 ~ 48V 6.7A	HLG-320H-54 54V 27 ~ 54V 5.95A			
NSTANT CURRENT REGION Note.4 ITED CURRENT ITED POWER PPLE & NOISE (max.) Note.2 DLTAGE ADJ. RANGE Note.6 JRRENT ADJ. RANGE DLTAGE TOLERANCE Note.3 IVE REGULATION DAD REGULATION	6 ~12V 22A 264W 150mVp-p 10.8 ~ 13.5V Can be adjust 11 ~ 22A ±3.0%	7.5 ~ 15V 19A 285W 150mVp-p 13.5 ~ 17V ed by internal p	10 ~ 20V 15A 300W 150mVp-p 17 ~ 22V	12~24V 13.34A 320.16W 150mVp-p	15 ~ 30V 10.7A 321W	18 ~ 36V 8.9A	21 ~ 42V 7.65A	24 ~ 48V	27~54V			
ATED CURRENT ATED POWER PPLE & NOISE (max.) Note.2 DLTAGE ADJ. RANGE Note.6 JRRENT ADJ. RANGE DLTAGE TOLERANCE Note.3 NE REGULATION DAD REGULATION	22A 264W 150mVp-p 10.8 ~ 13.5V Can be adjust 11 ~ 22A ±3.0%	19A 285W 150mVp-p 13.5 ~ 17V ed by internal p	15A 300W 150mVp-p 17 ~ 22V	13.34A 320.16W 150mVp-p	10.7A 321W	8.9A	7.65A					
NTED POWER PPLE & NOISE (max.) Note.2 DLTAGE ADJ. RANGE Note.6 IRRENT ADJ. RANGE DLTAGE TOLERANCE Note.3 NE REGULATION DAD REGULATION	264W 150mVp-p 10.8 ~ 13.5V Can be adjust 11 ~ 22A ±3.0%	285W 150mVp-p 13.5 ~ 17V ed by internal p	300W 150mVp-p 17 ~ 22V	320.16W 150mVp-p	321W			6.7A	5 95A			
PPLE & NOISE (max.) Note.2 DLTAGE ADJ. RANGE Note.6 IRRENT ADJ. RANGE DLTAGE TOLERANCE Note.3 NE REGULATION DAD REGULATION	150mVp-p 10.8 ~ 13.5V Can be adjust 11 ~ 22A ±3.0%	150mVp-p 13.5 ~ 17V ed by internal p	150mVp-p 17 ~ 22V	150mVp-p	-	320 4W			0.00/1			
DLTAGE ADJ. RANGE Note.6 IRRENT ADJ. RANGE DLTAGE TOLERANCE Note.3 NE REGULATION DAD REGULATION	10.8 ~ 13.5V Can be adjust 11 ~ 22A ±3.0%	13.5 ~ 17V ed by internal p	17 ~ 22V			0201111	321.3W	321.6W	321.3W			
IRRENT ADJ. RANGE	Can be adjust 11 ~ 22A ±3.0%	ed by internal p	1	04 0014	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p			
DLTAGE TOLERANCE Note.3 NE REGULATION DAD REGULATION	11 ~ 22A ±3.0%		otentiometer	21~26V	26 ~ 32V	32 ~ 39V	38 ~ 45V	43 ~ 52V	49~58V			
DLTAGE TOLERANCE Note.3 NE REGULATION DAD REGULATION	±3.0%	9.5~19A	Can be adjusted by internal potentiometer or through output cable									
NE REGULATION			7.5 ~ 15A	6.67~13.34A	5.35~10.7A	4.45~8.9A	3.8~7.65A	3.35 ~ 6.7A	2.97 ~ 5.95			
AD REGULATION		±2.0%	±1.5%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%			
	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
TUP RISE TIME Note 8	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%			
	2500ms, 80ms at full load 230VAC /115VAC											
DLD UP TIME (Typ.)	15ms at full load 230VAC /115VAC											
LTAGE RANGE Note.5	90 ~ 305VAC 127 ~ 431VDC											
EQUENCY RANGE	47 ~ 63Hz											
WER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.94/277VAC at full load (Please refer to "Power Factor Characteristic" curve)											
FICIENCY (Typ.) (230Vac)	91%	92.5%	93.5%	94%	94%	94.5%	95%	95%	95%			
FICIENCY (Typ.) (277Vac)	91.5%	93%	94%	94.5%	94.5%	95%	95%	95%	95%			
CURRENT (Typ.)												
RUSH CURRENT(Typ.)	COLD START 75A/230VAC											
AKAGE CURRENT	<0.75mA/277VAC											
OVER CURRENT Note.4												
	Protection type : Constant current limiting, recovers automatically after fault condition is removed											
	31		<u></u>		,							
						40~46V	46.5 ~ 53V	53.5~60V	59~65V			
ER VOLTAGE												
	$100^{\circ}C \pm 10^{\circ}C$ (RTH2)											
ER TEMPERATURE												
BRATION												
FETY STANDARDS Note.7												
THSTAND VOLTAGE												
BF					Joz4, light linuu	isti y level (sul						
			<u>(-21/1 (200)</u>									
		· · ·	т									
				ut rated load a	and 25°C of an	nhient temper	ature					
Ripple & noise are measure Tolerance : includes set up 1 Constant current operation r reconfirm special electrical r Derating may be needed un Type A and type C only. Safety and EMC design refe Length of set up time is mea	ple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. lerance : includes set up tolerance, line regulation and load regulation. Instant current operation region is within 50% ~100% rated output voltage. This is the suitable operation region for LED related applications, but please confirm special electrical requirements for some specific system design. Irrating may be needed under low input voltages. Please check the static characteristics for more details. pe A and type C only. fety and EMC design refer to EN60598-1, subject CNS15233, GB7000.1, FCC part18. ngth of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time.											
M FF F C RLA /E O /E /E OF O M BF F TI DLC IC B MI C AFTO TI TS LT O	VER FACTOR (Typ.) CIENCY (Typ.) (230Vac) CIENCY (Typ.) (277Vac) CURRENT (Typ.) JSH CURRENT (Typ.) KAGE CURRENT R CURRENT Note.4 RT CIRCUIT R VOLTAGE RKING TEMP. RKING HUMIDITY RAGE TEMP., HUMIDITY P. COEFFICIENT RATION ETY STANDARDS Note.7 ISTAND VOLTAGE EMISSION IMMUNITY F ENSION VING Ul parameters NOT special lipple & noise are measure lorance : includes set up lorastant current operation reconfirm special electrical reconfirms special electrical reconditeres special electrical reconditeres speci	ZER FACTOR (Typ.) PF>0.98/115V CIENCY (Typ.) (230Vac) 91% CIENCY (Typ.) (277Vac) 91.5% CURRENT (Typ.) 3.5A/115VAC JSH CURRENT (Typ.) COLD START KAGE CURRENT <0.75mA/27	ZER FACTOR (Typ.) PF>0.98/115VAC, PF>0.95/2 CIENCY (Typ.) (230Vac) 91% 92.5% CIENCY (Typ.) (230Vac) 91% 93% CURRENT (Typ.) 3.5A/115VAC 1.65A/ SURRENT (Typ.) 3.5A/115VAC 1.65A/ ISH CURRENT (Typ.) COLD START 75A/230VAC KAGE CURRENT <0.75mA/277VAC	ZER FACTOR (Typ.) PF>0.98/115VAC, PF>0.95/230VAC, PF>0 CIENCY (Typ.) (230Vac) 91% 92.5% 93.5% CIENCY (Typ.) (277Vac) 91.5% 93% 94% SURRENT (Typ.) 3.5A/115VAC 1.65A/230VAC SISH CURRENT (Typ.) COLD START 75A/230VAC 1.65A/230VAC KAGE CURRENT <0.75mA/277VAC	ZER FACTOR (Typ.) PF>0.98/115VAC, PF>0.95/230VAC, PF>0.94/277VAC at the constant co	Term PF>0.98/115VAC, PF>0.95/230VAC, PF>0.94/277VAC at full load (Pleas CIENCY (Typ.) (230Vac) 91% 92.5% 93.5% 94% 94% CIENCY (Typ.) (277Vac) 91.5% 93% 94% 94.5% 94.5% URRENT (Typ.) 3.5A / 115VAC 1.65A / 230VAC 1.45A / 277VAC Intervent of the interv	Terr PF>0.98/115VAC, PF>0.95/230VAC, PF>0.94/27TVAC at full load (Please refer to "Pow CIENCY (Typ.) (230Vac) 91% 92.5% 93.5% 94% 94% 94.5% 94.5% 95% CIENCY (Typ.) (277Vac) 91.5% 93.5% 94.6% 94.5% 95% CURRENT (Typ.) 3.5A/115VAC 1.65A/230VAC 1.45A/277VAC 95% SURRENT (Typ.) COLD START 75A/230VAC 40.5% 95% 95% SURRENT (Typ.) COLD START 75A/230VAC 40.75M/2 94.5% 94.5% R CURRENT Note.4 95 ~ 108% Protection type : Constant current limiting, recovers automatically after fault condition is removed. 14 ~ 17V 17.5 ~ 21V 22.5 ~ 27V 27 ~ 33V 33 ~ 37V 40 ~ 46V R VOLTAGE Protection type : Shut down and latch off o/p voltage, re-power on to recover 100°C ±10°C (RTH2) Protection type : Shut down and latch off o/p voltage, re-power on to recover 100°C ±10°C (RTH2) Protection type : Shut down and latch off o/p voltage, re-power on to recover 100°C ±10°C (0 (- 50°C) 10 ~ 500°L, 56 12min./1cycle, period for 72min. each along X, Y, Z axes ULR570, CSA C22 No. 250.0-08, EN61347-1, EN61347-2-13 independent (except for J61347-2-13 approved ; design refer to UL605	ER FACTOR (Typ.) PF>0.98/115VAC, PF>0.95/230VAC, PF>0.94/27TVAC at full load (Please refer to "Power Factor Char CIENCY (Typ.) (230Vac) 91% 92.5% 93.5% 94% 94.5% 94.5% 95% CIENCY (Typ.) (230Vac) 91.5% 93.5% 94.6% 94.5% 94.5% 95% 95% DIRRENT (Typ.) 3.5A /115VAC 1.65A / 230VAC 1.45A / 277VAC 55% SISH CURRENT (Typ.) COLD START 75A/230VAC 1.45A / 277VAC 55% SISH CURRENT (Typ.) COLD START 75A/230VAC 95.108% Protection type : Constant current limiting, recovers automatically after fault condition is removed. RT CIRCUIT Hiccup mode, recovers automatically after fault condition is removed. 14. ~17V 17.5 ~21V 22.5 ~27V 27 ~33V 33 ~37V 40 ~46U 46.5 ~53V R TEMPERATURE Protection type: Shut down and latch off o/p voltage, re-power on to recover 100°C ±10°C (RTH2) Protection type: Shut down and latch off o/p voltage, re-power on to recover RXING TEMP. 40 ~+70°C (Refer to "Derating Curve") 20.95% RH 95% Shut down and latch off o/p voltage, re-power on to recover RAGE TEMP, HUMIDITY 20 ~95% RH 96.05% Clope -50°C (1ATION RESISTANCE)	ER FACTOR (Typ.) PF>0.96/115VAC, PF>0.96/230VAC, PF>0.94/277VAC at full load (Please refer to "Power Factor Characteristic" curv CIENCY (Typ.) (230Vac) 91% 92.5% 93.5% 94% 94% 94.5% 95% 95% 95% CIENCY (Typ.) (277Vac) 91.5% 93.% 94.6% 94.5% 95%			




HLG-320H series

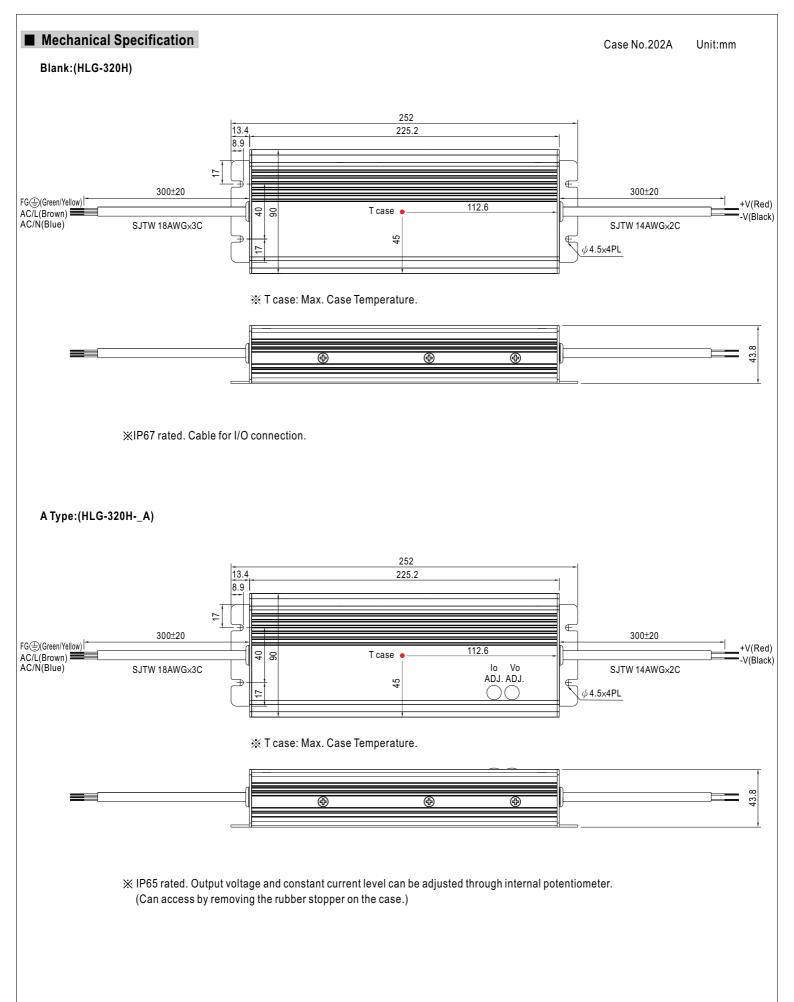



B Type:(HLG-320H-_B)

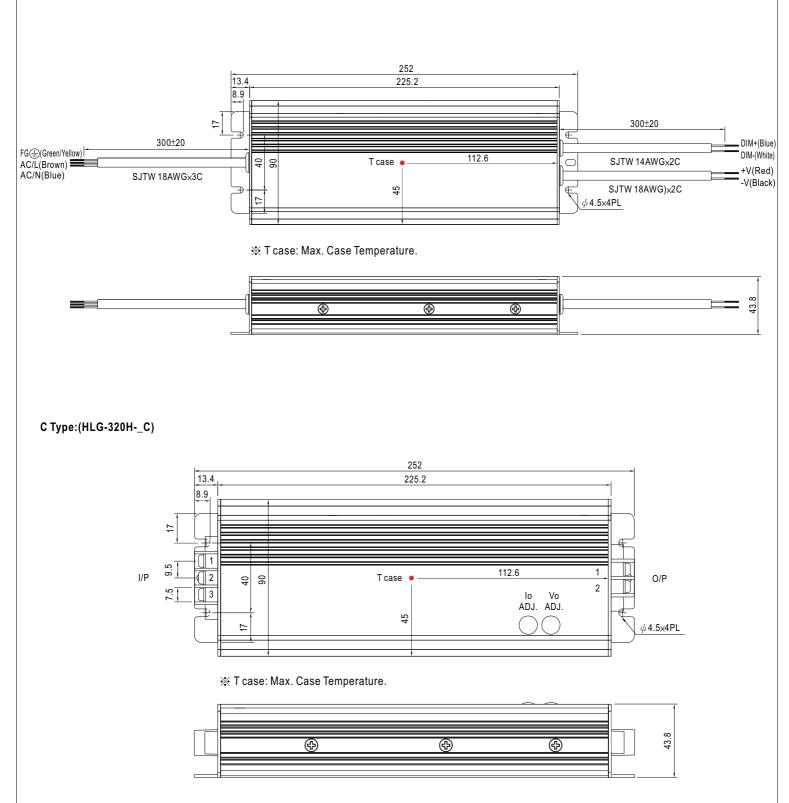

X Output voltage and constant current level can be adjusted through internal potentiometer. (Can access by removing the rubber stopper on the case.)


AC Input Terminal Pin No. Assignment

Pin No.	Assignment
1	FG ≟
2	AC/L
3	AC/N

DC Output Terminal Pin No. Assignment


Pin No.	Assignment					
1	+V					
2	-V					



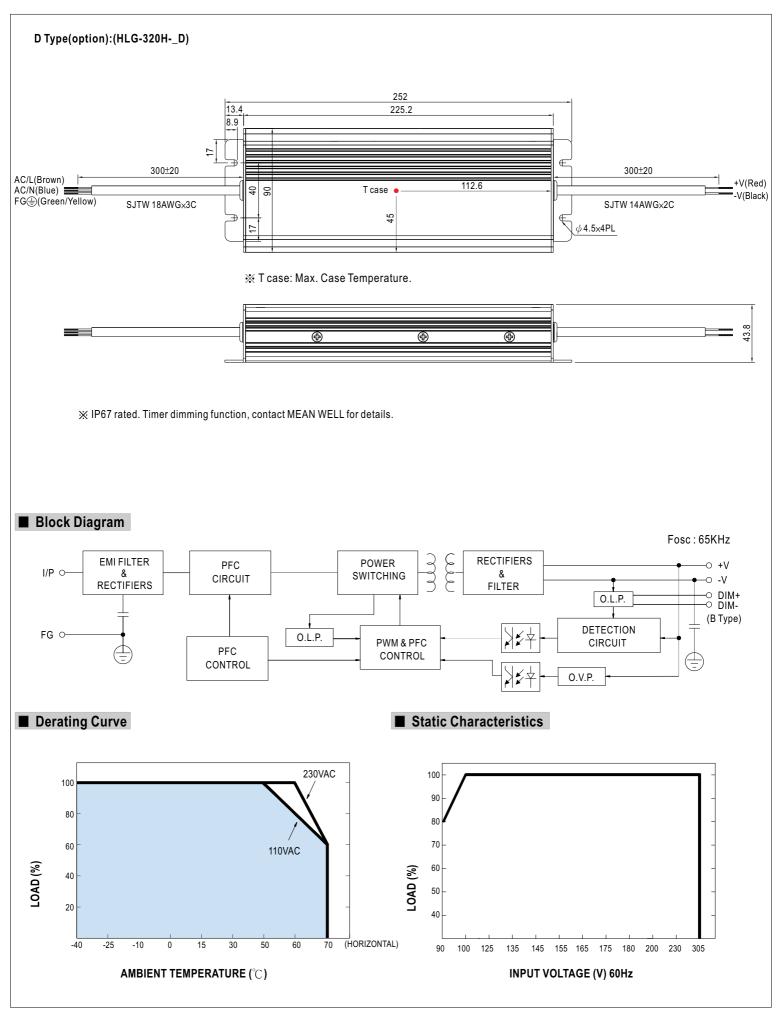




Power Factor Characteristic

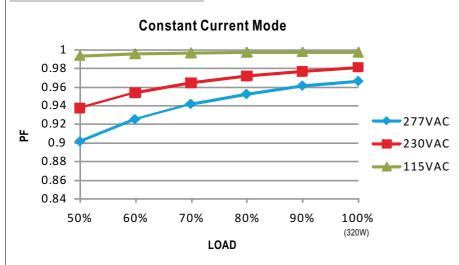

■ EFFICIENCY vs LOAD (48V Model)


HLG-320H series possess superior working efficiency that up to 95% can be reached in field applications.

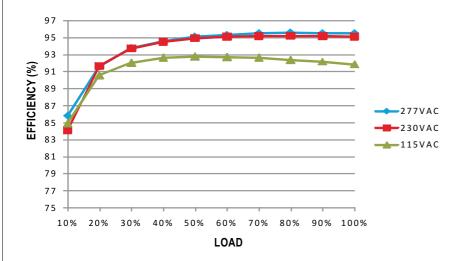

■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs. Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).




Typical LED power supply I-V curve



HLG-320H series

■ DIMMING OPERATION

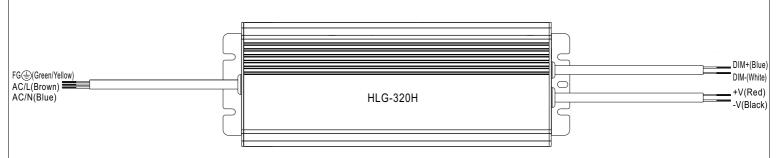

※ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.

※ Please DO NOT connect "DIM-" to "-V".


※ Reference resistance value for output current adjustment (Typical)

Resistance	Single driver	10K Ω	20Κ Ω	30Κ Ω	$40 \mathrm{K}\Omega$	50K Ω	$60 \mathrm{K}\Omega$	70Κ Ω	80K Ω	90Κ Ω	100K Ω	OPEN
value Multiple ((N=driver quantity	Multiple drivers (N=driver quantity for synchronized dimming operation)	10KΩ/N	20K Ω/N	30K Ω/N	40K Ω/N	50KΩ/N	60KΩ/N	70K Ω/N	80KΩ/N	90KΩ/N	100KΩ/N	
Percentage of rated current		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	98%~108%
ж 1 ~ 10V d	× 1 ~ 10V dimming function for output current adjustment (Typical)											
Dimming va	alue	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage	e of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	98%~108%
× 10V PWM signal for output current adjustment (Typical): Frequency range :100HZ ~ 3KHz												
Duty value		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage	e of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	98%~108%

XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

%Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/OFF :

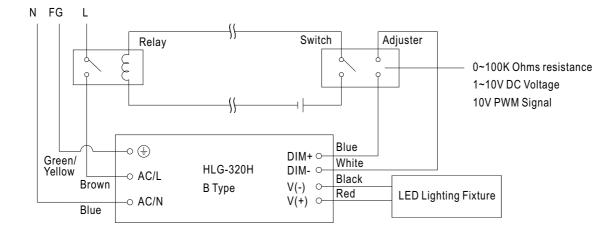

Using a switch and relay can turn ON/OFF the lighting fixture.

1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-. 2. The LED lighting fixture can be turned ON/OFF by the switch.