


* The heat sink has been removed for photo purpose.

Features

- Onboard VIA Eden(400/667MHz)/Ezra(800MHz) EPGA mobile CPU
- Supports Type II CompactFlash™ Memory
- Supports two Type II PCMCIA Slots (Optional)
- Dual 10/100Base-T Fast Ethernet
- 5V only operation

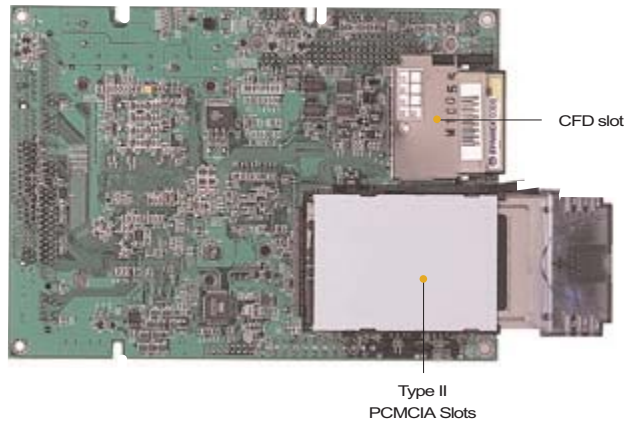

Specifications

System

- **CPU** VIA C3 Ezra(800MHz)/Eden(400MHz/667MHz) EPGA CPU
- **System Memory** SDRAM DIMM x 1, Max. 512MB
- **Chipset** VIA VT8606/VT82C686B
- **I/O Chipset** VIA VT82C686B, Winbond 83977EF as 2nd SIO for COM3, COM4 port.
- **BIOS** Award 256KB FLASH ROM
- **Ethernet** RTL8139C x 2, 10/100Base-T RJ-45 connector x 2
- **SSD** Type II CompactFlash Socket
- **Watchdog timer** Generate a system reset. Software selectable time-out interval
- **Expansion Interface** PCI slot x 1, PC/104 socket x 1, Type II PCMCIA slot x 2(Optional)
- **Battery** Lithium Battery
- **H/W status monitoring** Supports power supply voltages, fan speed and temperature monitoring.
- **Power supply voltage** +5V (4.75V to 5.25V), ATX or AT
- **Size/Weight** 8" (L) x 5.75" (W) (203mm x 146mm)
1.2lb. (0.5kg)
- **Operating temperature** 32°F ~ 140°F (0°C ~60°C)

I/O

- **MIO** IDE (UDMA100) x 1, FDD x 1, KB+Mouse x 1, RS232 x 3, RS-232/422/485 x 1, Parallel x 1.
- **IrDA** One IrDA Tx/Rx header
- **Audio** VIA VT82C686B, VIA 1612 Codec. AC-97, Mic In, Line In, Line out, CD Audio in.
- **USB** Two 5x2 pin headers support 4 USB 1.1 ports

Display

- **Chip** VIA VT8606 AGP 4X 3D Engine
- **Memory Size** Shared system memory up to 32MB
- **Resolution** up to 1600 x 1200@16bpp colors for CRT
up to 1024 x 768@24bpp for LCD
- **LCD Interface** 18/36-bit TTL/dual channel LVDS TFT/DSTN LCD.
- **TV-out** VIA 1621 supports NTSC/PAL composite outputs
- **Supports CRT and LCD simultaneous display**

Packing List

- Jumper cap 9657666600
- Quick Installation Guide
- Utility CD