# 0 WATTS 1

## REL-110 SERIES AC-DC

## FEATURES:

- High Efficiency
- Advanced SMT Design
- Fits 1U Applications
- RoHS Compliant
   EN 60950-1 ITE Certification
   Universal 85-264 VAC Input
   EN 60601-1 Medical Certification
  - Class B Emissions per EN 55011/22
  - Harmonic Current per EN 61000-3-2
- Compact 3" x 5" x 1.3" Size EMC to EN 61000-6-2 & EN 60601-1-2
  - Optional Chassis and Cover

CHASSIS/COVER

• One to Four Outputs



**OPEN FRAME** 

#### SAFETY SPECIFICATIONS

SAFETY S	PECIFICATI				
			Protection Cla	ss: I	
General			Overvoltage C		
General			Pollution Degr		
			5		
	Underwriters			nd Edition, 2007	
c 🔁 us	Laboratories			st Edition, 2006	
	File E137708/	/E140259		5 60601-1, 2005	
				ertificates (including a	ll
TEREE				Group Deviations)	
			IEC 60950-1/A	1:2009, Second Edit	ion
SCHEME			IEC 60601-1:1	988 +A1:1991 +A2:19	995
			IEC 60601-1:2	005 Third Edition	
	UL Recognitio	n	CAN/CSA-C22	2.2 No. 60950-1-07,	
c 🔁 us			2 <sup>nd</sup> Edition		
C <b>The</b> US	US Mark for Canada File E137708/E140259		CAN/CSA-C22	2.2 No. 601-1-M90, 20	05
	FIIE E137708/	E140259	CAN/CSA-C22	2.2 No. 60601-1:2008	
			EN 60950-1/A	1:2010	
TUV	TUV		EN 60601-1/A	2:1995	
SUD			EN 60601-1:20	006	
			Law Maltana D	des attens	
(			Low Voltage D		
			(2000/95/EC 0	f December 2006)	
MODEL LIS					
MODEL	OUTPUT 1		2(8) OUTPUT 3	3 <sub>(7)</sub> OUTPUT 4 <sub>(7)</sub>	
DEL 110 4001					
REL-110-4001	+3.3V/10A <sub>(1)</sub>	+5V/6A	+12V/2A	-12V/2A	
REL-110-4002	+5V/10A(1)	+3.3V/6A	+12V/2A	-12V/2A	
REL-110-4002 REL-110-4003	+5V/10A <sub>(1)</sub> +5V/10A <sub>(1)</sub>	+3.3V/6A +3.3V/6A	+12V/2A +15V/2A	-12V/2A -15V/2A	
REL-110-4002 REL-110-4003 REL-110-4004	+5V/10A <sub>(1)</sub> +5V/10A <sub>(1)</sub> +5V/10A <sub>(1)</sub>	+3.3V/6A +3.3V/6A -5V/6A	+12V/2A +15V/2A +12V/2A	-12V/2A -15V/2A -12V/2A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4005	+5V/10A <sub>(1)</sub> +5V/10A <sub>(1)</sub> +5V/10A <sub>(1)</sub> +5V/10A <sub>(1)</sub>	+3.3V/6A +3.3V/6A -5V/6A -5V/6A	+12V/2A +15V/2A +12V/2A +15V/2A	-12V/2A -15V/2A -12V/2A -15V/2A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4005 REL-110-4006	+5V/10A <sub>(1)</sub> +5V/10A <sub>(1)</sub> +5V/10A <sub>(1)</sub> +5V/10A <sub>(1)</sub> +5V/10A <sub>(1)</sub>	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4005 REL-110-4006 REL-110-4007	$\begin{array}{c} +5V/10A_{(1)} \\ +5V/10A_{(1)} \\ +5V/10A_{(1)} \\ +5V/10A_{(1)} \\ +5V/10A_{(1)} \\ +5V/10A_{(1)} \end{array}$	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -12V/2A -15V/2A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4005 REL-110-4006 REL-110-4007 REL-110-4009	$\begin{array}{c} +5V/10A_{(1)} \\ +5V/10A_{(1)} \\ +5V/10A_{(1)} \\ +5V/10A_{(1)} \\ +5V/10A_{(1)} \\ +5V/10A_{(1)} \\ +5V/10A_{(1)} \end{array}$	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +24V/2A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -15V/2A -7V/2.5A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4005 REL-110-4006 REL-110-4007 REL-110-4009 REL-110-3001	+5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1)	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +24V/2A +12V/3A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A	-12V/2A -15V/2A -12V/2A -12V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4005 REL-110-4007 REL-110-4007 REL-110-4009 REL-110-3001 REL-110-3002	+5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1)	+3.3V/6A +3.3V/6A -5V/6A +24V/2A +24V/2A +24V/2A +12V/3A +15V/2A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A -15V/2A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4005 REL-110-4007 REL-110-4009 REL-110-3001 REL-110-3002 REL-110-3003	$\begin{array}{c} +5V/10A(1)\\ +8V/6A\\ \end{array}$	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +24V/2A +12V/3A +15V/2A -8V/1A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A +7V/2.5A	-12V/2A -15V/2A -12V/2A -12V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4005 REL-110-4007 REL-110-4007 REL-110-3001 REL-110-3002 REL-110-3003 REL-110-3004	$\begin{array}{c} +5V/10A_{(1)} \\ +8V/6A \\ +9V/3A \end{array}$	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +24V/2A +12V/3A +15V/2A -8V/1A -24V/3A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A -15V/2A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4005 REL-110-4007 REL-110-4007 REL-110-4009 REL-110-3001 REL-110-3002 REL-110-3004 REL-110-3004	$\begin{array}{c} +5V/10A(1)\\ +8V/6A\\ +9V/3A\\ +3.3V/10A(1)\end{array}$	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +12V/3A +15V/2A -8V/1A -24V/3A +5V/6A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A +7V/2.5A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A -15V/2A	
REL-110-4002 REL-110-4003 REL-110-4005 REL-110-4005 REL-110-4007 REL-110-4007 REL-110-4007 REL-110-3001 REL-110-3003 REL-110-3003 REL-110-2001 REL-110-2002	+5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +8V/6A +9V/3A +3.3V/10A(1) +5V/10A(1)	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +24V/2A +12V/3A +15V/2A -8V/1A -24V/3A +5V/6A +12V/5A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A +7V/2.5A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A -15V/2A	-
REL-110-4002 REL-110-4003 REL-110-4005 REL-110-4005 REL-110-4007 REL-110-4007 REL-110-4007 REL-110-3001 REL-110-3002 REL-110-3004 REL-110-2001 REL-110-2002 REL-110-2003	+5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1)	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +12V/2A +15V/2A +15V/2A -8V/1A -24V/3A +5V/6A +12V/5A +24V/3A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A +7V/2.5A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A -15V/2A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4005 REL-110-4007 REL-110-4007 REL-110-4007 REL-110-3001 REL-110-3003 REL-110-3003 REL-110-2001 REL-110-2003 REL-110-2004	+5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +8V/6A +9V/3A +3.3V/10A(1) +5V/10A(1)	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +12V/2A +12V/2A +15V/2A -8V/1A -24V/3A +15V/6A +12V/5A +24V/3A -12V/4A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A +7V/2.5A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A -15V/2A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4005 REL-110-4007 REL-110-4007 REL-110-4007 REL-110-3001 REL-110-3003 REL-110-3003 REL-110-2001 REL-110-2003 REL-110-2003 REL-110-2004 REL-110-2005	+5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +8V/6A +9V/3A +3.3V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1)	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +12V/2A +15V/2A +15V/2A -8V/1A -24V/3A +5V/6A +12V/5A +24V/3A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A +7V/2.5A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A -15V/2A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4005 REL-110-4007 REL-110-4007 REL-110-4007 REL-110-3001 REL-110-3003 REL-110-3003 REL-110-2001 REL-110-2003 REL-110-2004	+5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +8V/6A +9V/3A +33V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +12V/5A +15V/4A	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +24V/2A +12V/3A +15V/2A -8V/1A -24V/3A +5V/6A +12V/5A +24V/3A -12V/4A -15V/3A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A +7V/2.5A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A -15V/2A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4006 REL-110-4007 REL-110-4007 REL-110-3001 REL-110-3002 REL-110-3003 REL-110-3004 REL-110-2002 REL-110-2002 REL-110-2004 REL-110-2005 REL-110-2006	+5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +8V/6A +9V/3A +3.3V/10A(1) +5V/10A(1) +5V/10A(1) +12V/5A +15V/4A +18V/4A	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +24V/2A +12V/3A +15V/2A -8V/1A -24V/3A +5V/6A +12V/5A +24V/3A -12V/4A -15V/3A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A +7V/2.5A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A -15V/2A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4005 REL-110-4007 REL-110-4007 REL-110-3001 REL-110-3003 REL-110-3003 REL-110-3004 REL-110-2001 REL-110-2003 REL-110-2004 REL-110-2005 REL-110-2006 REL-110-2006	+5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +8V/6A +9V/3A +3.3V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +12V/5A +15V/4A +18V/4A 2.5V/22A(2)	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +24V/2A +12V/3A +15V/2A -8V/1A -24V/3A +5V/6A +12V/5A +24V/3A -12V/4A -15V/3A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A +7V/2.5A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A -15V/2A	
REL-110-4002 REL-110-4003 REL-110-4005 REL-110-4005 REL-110-4007 REL-110-4007 REL-110-4007 REL-110-3001 REL-110-3003 REL-110-3003 REL-110-2001 REL-110-2003 REL-110-2005 REL-110-2005 REL-110-2005 REL-110-2006	+5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +8V/6A +9V/3A +3.3V/10A(1) +5V/10A(1) +5V/10A(1) +12V/5A +15V/4A +18V/4A 2.5V/22A(2) 3.3V/22A(2)	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +24V/2A +12V/3A +15V/2A -8V/1A -24V/3A +5V/6A +12V/5A +24V/3A -12V/4A -15V/3A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A +7V/2.5A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A -15V/2A	
REL-110-4002 REL-110-4003 REL-110-4005 REL-110-4005 REL-110-4007 REL-110-4007 REL-110-4007 REL-110-3001 REL-110-3002 REL-110-3004 REL-110-2001 REL-110-2004 REL-110-2005 REL-110-2006 REL-110-1001 REL-110-1002 REL-110-1003	+5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +12V/5A +15V/4A +18V/4A	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +24V/2A +12V/3A +15V/2A -8V/1A -24V/3A +5V/6A +12V/5A +24V/3A -12V/4A -15V/3A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A +7V/2.5A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A -15V/2A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4006 REL-110-4007 REL-110-4007 REL-110-4007 REL-110-3002 REL-110-3003 REL-110-3003 REL-110-2002 REL-110-2003 REL-110-2005 REL-110-2005 REL-110-2006 REL-110-1001 REL-110-1002 REL-110-1003 REL-110-1005 REL-110-1006	+5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +12V/5A +15V/4A +15V/4A +15V/4A +15V/4A +15V/2A(2) 5V/22A(2)	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +24V/2A +12V/3A +15V/2A -8V/1A -24V/3A +5V/6A +12V/5A +24V/3A -12V/4A -15V/3A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A +7V/2.5A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A -15V/2A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4006 REL-110-4007 REL-110-4007 REL-110-4007 REL-110-3001 REL-110-3003 REL-110-3003 REL-110-3004 REL-110-2002 REL-110-2004 REL-110-2005 REL-110-2006 REL-110-2006 REL-110-1001 REL-110-1002 REL-110-1003 REL-110-1004 REL-110-1005 REL-110-1006 REL-110-1007	+5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +12V/5A +15V/4A +18V/4A 2.5V/22A(2) 5V/22A(2) 5V/22A(2) 12V/9.2A 15V/7.3A 24V/4.6A 28V/3.9A	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +24V/2A +12V/3A +15V/2A -8V/1A -24V/3A +5V/6A +12V/5A +24V/3A -12V/4A -15V/3A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A +7V/2.5A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A -15V/2A	
REL-110-4002 REL-110-4003 REL-110-4004 REL-110-4006 REL-110-4007 REL-110-4007 REL-110-4007 REL-110-3002 REL-110-3003 REL-110-3003 REL-110-2002 REL-110-2003 REL-110-2005 REL-110-2005 REL-110-2006 REL-110-1001 REL-110-1002 REL-110-1003 REL-110-1005 REL-110-1006	+5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +5V/10A(1) +12V/5A +15V/4A +15V/4A +15V/4A +15V/4A +15V/2A(2) 5V/22A(2)	+3.3V/6A +3.3V/6A -5V/6A -5V/6A +24V/2A +24V/2A +24V/2A +12V/3A +15V/2A -8V/1A -24V/3A +5V/6A +12V/5A +24V/3A -12V/4A -15V/3A	+12V/2A +15V/2A +12V/2A +15V/2A +12V/2A +12V/2A +15V/2A +7V/2.5A	-12V/2A -15V/2A -12V/2A -15V/2A -12V/2A -15V/2A -7V/2.5A -12V/3A -15V/2A	


OUTPUT SPECIFICAT Total Output Power at 50°C	80W	Convection Cooled	
	110W	300 LFM Forced Air	
Output Voltage Centering	Output 1:	$\pm 0.5\%$ (All outputs	
	Output 2:	$\pm 5.0\%$ at 50% load)	
	Output 3:	± 5.0%	
	Output 4:	± 5.0%	
Output Voltage Adjust Range	Output 1:	95-105%	
Load Regulation	Output 1:	0.5% (10-100% load change)	
	Output 2:	5.0%	
	(4001-5 Models)	8.0%	
	(2001 Model)	6.0%	
	Output 3:	5.0%	
	Output 4:	5.0%	
Source Regulation	Outputs 1 – 4:	0.5%	
Cross Regulation	Outputs 2 – 4:	5.0%	
Output Noise	Outputs 1 – 4:	1.0%	
Turn on Overshoot	None		
Transient Response	Outputs 1 – 4		
Voltage Deviation Recovery Time	5.0%		
5	500µS		
Load Change Output Overvoltage Protection	50% to 100% Output 1:	110% to 150%	
Output Overvoilage Protection		110% to 150% Pout, cycle on/off, auto recovery	
Hold Up Time	16 mS min Full	Power, 85V Input	
Start Up Time	4 Seconds, 120V		
INPUT SPECIFICATIO	A Seconds, 120V	Input	
Source Voltage	85 – 264 Volts A	0	
	47 – 63 Hz		
Frequency Range Peak Inrush Current	40A		
Efficiency		ower, 230V, varies by model	
Power Factor	0.95 (Full Power,		
ENVIRONMENTAL SP			
AMBIENT OPERATING	0° C TO + 70° C		
Temperature Range		wer Rating Chart	
Ambient Storage Temp. Range Temperature Coefficient	- 40° C to + 85° Outputs 1 – 4:		
		0.02%/°C	
GENERAL SPECIFICA	TIONS		
Means of Protection		of Onerator Dratestion)	
Primary to Secondary Primary to Ground	2MOOP (Means of Operator Protection) 1MOOP (Means of Operator Protection)		
Secondary to Ground		ation(Consult factory for 1MOOP or 1MOF	
Dielectric Strength(17)	operationarinsul		
Reinforced Insulation	5656 VDC. Prima	ary to Secondary, 1 Sec.	
Basic Insulation	2545 VDC, Prima	ary to Ground, 1 Sec.	
Operational Insulation		dary to Ground, 1 Sec.	
		1	
Leakage Current			
Leakage Current Earth Leakage	<300uA NC, <10	00uA SFC	
	<300uA NC, <10 <100uA NC, <50		
Earth Leakage Touch Current	<100uA NC, <50 Logic low with inp	OuA SFC out power failure 10 mS	
Earth Leakage Touch Current	<100uA NC, <50 Logic low with inp minimum prior to	0uA SFC out power failure 10 mS Output 1 dropping 1%	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only)	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens	0uA SFC out power failure 10 mS Output 1 dropping 1% ation of output cable losses	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m	0uA SFC put power failure 10 mS Output 1 dropping 1% ation of output cable losses in., MIL-HDBK-217F, 25° C, GB	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Weight	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open	0uA SFC put power failure 10 mS Output 1 dropping 1% ation of output cable losses in., MIL-HDBK-217F, 25° C, GB Frame/ 1.28 Lbs. Chassis and Cover	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Weight ELECTROMAGNETIC	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open COMPATIBIL	0uA SFC put power failure 10 mS Output 1 dropping 1% ation of output cable losses in., MIL-HDBK-217F, 25° C, GB	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Weight Electrostatic Discharge	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open COMPATIBIL EN 61000-4-2	0uA SFC put power failure 10 mS Output 1 dropping 1% ation of output cable losses in., MIL-HDBK-217F, 25° C, GB Frame/ 1.28 Lbs. Chassis and Cover ITY SPECIFICATIONS ±8kV Contact/ ±8kV Air Discharge	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Weight ELECTROMAGNETIC Electrostatic Discharge Radiated Electromagnetic Field	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open COMPATIBIL EN 61000-4-2 En 61000-4-3	0uA SFC put power failure 10 mS Output 1 dropping 1% ation of output cable losses in., MIL-HDBK-217F, 25° C, GB Frame/ 1.28 Lbs. Chassis and Cover ITY SPECIFICATIONS	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Weight ELECTROMAGNETIC Electrostatic Discharge Radiated Electromagnetic Field	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open COMPATIBIL EN 61000-4-2	0uA SFC put power failure 10 mS Output 1 dropping 1% ation of output cable losses in., MIL-HDBK-217F, 25° C, GB Frame/ 1.28 Lbs. Chassis and Cover ITY SPECIFICATIONS ±8kV Contact/ ±8kV Air Discharge	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Weight ElectroROMAGNETIC Electrostatic Discharge Radiated Electromagnetic Field EFT/Bursts	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open COMPATIBIL EN 61000-4-2 En 61000-4-3	0uA SFC put power failure 10 mS Output 1 dropping 1% ation of output cable losses in., MIL-HDBK-217F, 25° C, GB Frame/ 1.28 Lbs. Chassis and Cover <b>LTY SPECIFICATIONS</b> ±8kV Contact/ ±8kV Air Discharge 80MHz-2.5GHz, 10/m, 80% AM	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Weight ElectroROMAGNETIC Electrostatic Discharge Radiated Electromagnetic Field EFT/Bursts	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open COMPATIBIL EN 61000-4-2 En 61000-4-3 EN 61000-4-4	0uA SFC put power failure 10 mS Output 1 dropping 1% ation of output cable losses in., MIL-HDBK-217F, 25° C, GB Frame/ 1.28 Lbs. Chassis and Cover <b>LTY SPECIFICATIONS</b> ±8kV Contact/ ±8kV Air Discharge 80MHz-2.5GHz, 10/m, 80% AM ±2 kV ±1 kV Common Mode	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Neight ELECTIROMAGNIETIC Electrostatic Discharge Radiated Electromagnetic Field EFT/Bursts Surges	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open COMPATIBIL EN 61000-4-2 En 61000-4-3 EN 61000-4-4	0uA SFC put power failure 10 mS Output 1 dropping 1% ation of output cable losses in., MIL-HDBK-217F, 25° C, GB Frame/ 1.28 Lbs. Chassis and Cover <b>LTY SPECIFICATIONS</b> ±8kV Contact/ ±8kV Air Discharge 80MHz-2.5GHz, 10/m, 80% AM ±2 kV	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Weight <b>ELECTROMAGNETIC</b> Electrostatic Discharge Radiated Electromagnetic Field EFT/Bursts Surges Conducted Immunity	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open <b>COMPATIBIL</b> EN 61000-4-2 En 61000-4-3 EN 61000-4-4 EN 61000-4-5	0uA SFC put power failure 10 mS Output 1 dropping 1% ation of output cable losses in., MIL-HDBK-217F, 25° C, GB Frame/ 1.28 Lbs. Chassis and Cover <b>LTY SPECIFICATIONS</b> #3kV Contact/ ±8kV Air Discharge 80MHz-2.5GHz, 10/m, 80% AM ±2 kV ± 1 kV Common Mode ±2 kV Differential Mode	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Weight <b>ELECTROMAGNETIC</b> Electrostatic Discharge Radiated Electromagnetic Field EFT/Bursts Surges Conducted Immunity	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open <b>COMPATIBIL</b> EN 61000-4-2 En 61000-4-3 EN 61000-4-4 EN 61000-4-5 EN 61000-4-6	0uA SFC put power failure 10 mS Output 1 dropping 1% ation of output cable losses in., MIL-HDBK-217F, 25° C, GB Frame/ 1.28 Lbs. Chassis and Cover <b>ITY SPECIFICATIONS</b> ±8kV Contact/ ±8kV Air Discharge 800Hz-2.5GHz, 10/m, 80% AM ±2 kV ± 1 kV Common Mode ±2 kV ± 1 kV Common Mode ±2 kV Differential Mode .15 to 800Hz, 10V, 80% AM	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Weight <b>ELECTROMAGNETIC</b> Electrostatic Discharge Radiated Electromagnetic Field EFT/Bursts Surges Conducted Immunity	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open <b>COMPATIBIL</b> EN 61000-4-2 En 61000-4-3 EN 61000-4-4 EN 61000-4-5 EN 61000-4-6	0uA SFC         pout power failure 10 mS         Output 1 dropping 1%         ation of output cable losses         sin., MIL-HDBK-217F, 25° C, GB         Frame/ 1.28 Lbs. Chassis and Cover         LTY SPECIFICATIONS         ±8kV Contact/ ±8kV Air Discharge         80MHz-2.5GHz, 10/m, 80% AM         ±2 kV         ±1 kV Common Mode         ±2 kV Differential Mode         .15 to 80MHz, 10V, 80% AM         30% Reduction, 500ms         95% Reduction, 10ms	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Weight <b>ELECTROMAGNETIC</b> Electrostatic Discharge Radiated Electromagnetic Field EFT/Bursts Surges Conducted Immunity	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open <b>COMPATIBIL</b> EN 61000-4-2 En 61000-4-3 EN 61000-4-4 EN 61000-4-5 EN 61000-4-6	0uA SFC         pout power failure 10 mS         Output 1 dropping 1%         ation of output cable losses         iin., MIL-HDBK-217F, 25° C, GB         Frame/ 1.28 Lbs. Chassis and Cover         ITY SPECIFICATIONS         ±8kV Contact/ ±8kV Air Discharge         80MHz-2.5GHz, 10/m, 80% AM         ±2 kV         ±1 kV Common Mode         ±2 kV Differential Mode         .15 to 80MHz, 10V, 80% AM         30% Reduction, 500ms         95% Reduction, 10ms         60% Reduction, 1s (Criteria B)	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Weight ELECTROMAGNETIC Electrostatic Discharge Radiated Electromagnetic Field EFT/Bursts Surges Conducted Immunity Voltage Dips and Interruptions	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open <b>COMPATIBIL</b> EN 61000-4-2 En 61000-4-3 EN 61000-4-5 EN 61000-4-5 EN 61000-4-6 EN 61000-4-11	0uA SFC         pout power failure 10 mS         Output 1 dropping 1%         ation of output cable losses         sin., MIL-HDBK-217F, 25° C, GB         Frame/ 1.28 Lbs. Chassis and Cover         ITY SPECIFICATIONS         ±8kV Contact/ ±8kV Air Discharge         80MHz-2.5GHz, 10/m, 80% AM         ±2 kV         ±1 kV Common Mode         ±2 kV Differential Mode         .15 to 80MHz, 10V, 80% AM         30% Reduction, 500ms         95% Reduction, 1s (Criteria B)         95% Reductions, 5000ms	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Weight ELECTROMAGNETIC Electrostatic Discharge Radiated Electromagnetic Field EFT/Bursts Surges Conducted Immunity Voltage Dips and Interruptions Radiated Emissions	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open <b>COMPATIBIL</b> EN 61000-4-2 EN 61000-4-3 EN 61000-4-5 EN 61000-4-5 EN 61000-4-6 EN 61000-4-11 EN 55011/22	OuA SFC         but power failure 10 mS         Output 1 dropping 1%         ation of output cable losses         iin., MIL-HDBK-217F, 25° C, GB         Frame/ 1.28 Lbs. Chassis and Cover         ITY SPECIFICATIONS         ±8kV Contact/ ±8kV Air Discharge         80MHz-2.5GHz, 10/m, 80% AM         ±2 kV         ±1 kV Common Mode         ±2 kV Differential Mode         .15 to 80MHz, 10V, 80% AM         30% Reduction, 500ms         95% Reduction, 1 (Criteria B)         95% Reductions, 5000ms         Class B	
Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Weight ELECTROMAGNETIC Electrostatic Discharge Radiated Electromagnetic Field EFT/Bursts Surges Conducted Immunity Voltage Dips and Interruptions Radiated Emissions Conducted Emissions Conducted Emissions	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open <b>COMPATIBIL</b> EN 61000-4-2 EN 61000-4-3 EN 61000-4-4 EN 61000-4-5 EN 61000-4-6 EN 61000-4-11 EN 55011/22 EN 55011/22	0uA SFC         pout power failure 10 mS         Output 1 dropping 1%         ation of output cable losses         sin., MIL-HDBK-217F, 25° C, GB         Frame/ 1.28 Lbs. Chassis and Cover         LTY SPECIFICATIONS         ±8kV Contact/ ±8kV Air Discharge         80MHz-2.5GHz, 10/m, 80% AM         ±2 kV         ±1 kV Common Mode         ±2 kV Differential Mode         .15 to 80MHz, 10V, 80% AM         30% Reduction, 500ms         95% Reduction, 1s (Criteria B)         95% Reductions, 5000ms	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Weight <b>ELECTROMAGNETIC</b> Electrostatic Discharge Radiated Electromagnetic Field EFT/Bursts Surges Conducted Immunity Voltage Dips and Interruptions Radiated Emissions Conducted Emissions Harmonic Current Emissions	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open <b>COMPATIBIL</b> EN 61000-4-2 En 61000-4-3 EN 61000-4-4 EN 61000-4-4 EN 61000-4-6 EN 61000-4-6 EN 61000-4-11 EN 55011/22 EN 55011/22 EN 55011/22 EN 61000-3-2	OuA SFC         but power failure 10 mS         Output 1 dropping 1%         ation of output cable losses         iin., MIL-HDBK-217F, 25° C, GB         Frame/ 1.28 Lbs. Chassis and Cover         ITY SPECIFICATIONS         ±8kV Contact/ ±8kV Air Discharge         80MHz-2.5GHz, 10/m, 80% AM         ±2 kV         ±1 kV Common Mode         ±2 kV Differential Mode         .15 to 80MHz, 10V, 80% AM         30% Reduction, 500ms         95% Reduction, 1 (Criteria B)         95% Reductions, 5000ms         Class B	
Earth Leakage Touch Current Power Fail Signal Remote Sense (singles only) Mean-Time Between Failures Weight ELECTROMAGNETIC Electrostatic Discharge Radiated Electromagnetic Field EFT/Bursts Surges Conducted Immunity Voltage Dips and Interruptions Radiated Emissions Conducted Emissions	<100uA NC, <50 Logic low with inp minimum prior to 250mV compens 100,000 Hours m 0.80 Lbs. Open <b>COMPATIBIL</b> EN 61000-4-2 EN 61000-4-3 EN 61000-4-4 EN 61000-4-5 EN 61000-4-6 EN 61000-4-11 EN 55011/22 EN 55011/22	OuA SFC         but power failure 10 mS         Output 1 dropping 1%         ation of output cable losses         iin., MIL-HDBK-217F, 25° C, GB         Frame/ 1.28 Lbs. Chassis and Cover         ITY SPECIFICATIONS         ±8kV Contact/ ±8kV Air Discharge         80MHz-2.5GHz, 10/m, 80% AM         ±2 kV         ±1 kV Common Mode         ±2 kV Differential Mode         .15 to 80MHz, 10V, 80% AM         30% Reduction, 500ms         95% Reduction, 1 (Criteria B)         95% Reductions, 5000ms         Class B	

Refer to Applications Information for complete output power ratings.

All specifications are maximum at 25° C, 110W unless otherwise stated, may vary by

model and are subject to change without notice.


Specify optional chassis and cover when ordering.

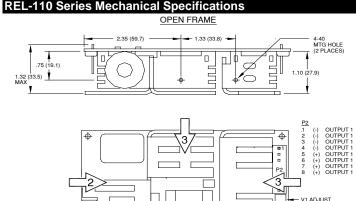


AC INPUT


GND



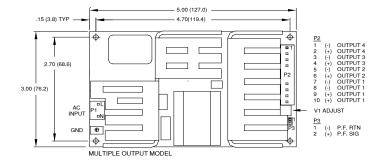



<u>OPTIONAL CHASSIS/COVER</u> 4.70 (119.4)

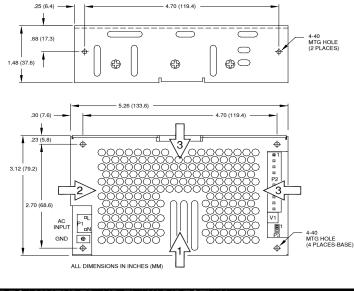


 RECOMMENDED AIR FLOW DIRECTION

 1 – Optimum
 2 – Good
 3 – Fair

### **APPLICATIONS INFORMATION**

- 1. Rated 8A maximum with convection cooling.
- 2. Rated 16A maximum with convection cooling.
- 3. Total power must not exceed 80 watts with convection cooling on open frame models except where noted.
- Total power must not exceed 110 watts with 300 LFM forced air cooling on open frame models.
- 5. Total power must not exceed 65 watts with convection cooling and chassis/cover option.
- Total power must not exceed 110 watts with 300 LFM forced air cooling and chassis/cover option.
- 7. Total current from Outputs 3 & 4 must not exceed 3 amps with convection cooling.
- Total current from Outputs 1 & 2 must not exceed 12 amps with convection cooling.
- 9. Semiconductor case temperatures must not exceed 110°C.
- Each output can deliver its rated current but total output power must not exceed maximum power as determined by the cooling method stated above.
- 11. Sufficient area must be provided around convection cooled power supplies to allow natural movement of air to develop.
- 12. 300 linear feet per minute of airflow must be maintained one inch above any point of the heatsink in the direction shown when forced air cooling is required.
- 13. This product is intended for use as a professionally installed component within information technology and medical equipment.
- A minimum load of 10% is required on output one to ensure proper regulation of remaining outputs.
- Remote sense terminals may be used to compensate for cable losses up to 250mV (single output models only). The use of a twisted pair is recommended as well as a decoupling capacitor (0.1 - 10μF) and a capacitor of 100μF/amp connected across the load side.
- Peak to peak output ripple and noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip, 20 MHz bandwidth.
- 17. This product was type tested and safety certified using the dielectric strength test voltages listed in Table 6 of IEC 60601-1:2005. In consideration of Clause 8.8.3, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Primary and secondary to ground capacitors may need to be disconnected prior to performing a dielectric strength test on the power supply or the end product. It is highly recommended that the DC test voltages listed in DVB.1, Annex DVB of UL 60601-1 1<sup>st</sup> Edition are not exceeded during a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
- This power supply has been safety approved and final tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
- Maximum screw penetration into bottom chassis mounting holes is .100 inches.
- 20. Maximum screw penetration into side chassis mounting holes is .250 inches.
- To meet emissions specifications, all four mounting hole pads must be electrically
- connected to a common metal chassis. Chassis/cover option recommended.
- This product includes only one fuse in the input circuit. In consideration of Clause 8.11.5 of IEC 60601-1:2005, a second fuse may be required in the end product.

MAXIMUM OUTPUT POWER VS. AMBIENT TEMPERATURE

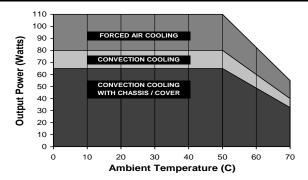

_		
Cor	nnector Spe	ecifications
P1	AC Input	.156 friction lock header mates with Tyco 640250-3 or
		equivalent crimp terminal housing with Tyco 3-640706-1 or
		equivalent crimp terminal.
P2	DC Output	.156 friction lock header mates with Tyco 770849-8 or
	(Single)	equivalent crimp terminal housing with Tyco 3-640707-1 or
		equivalent crimp terminal.
P2	DC Output	.156 friction lock header mates with Tyco 1-770849-0 or
	(Multiple)	equivalent crimp terminal housing with Tyco 3-640707-1 or
		equivalent crimp terminal.
G	Ground	.187 quick disconnect terminal.
P3	P.F./Sense	.100 breakaway header mates with Molex 50-57-9006 or
	(Single)	equivalent crimp terminal housing with Molex type 71851 or
		equivalent crimp terminal.
P3	P.F.	.100 breakaway header mates with Molex 50-57-9002 or
	(Multiple)	equivalent crimp terminal housing with Molex type 71851 or
		equivalent crimp terminal.