


SM2040 Series

6-1/2 Digit PCI Multimeters

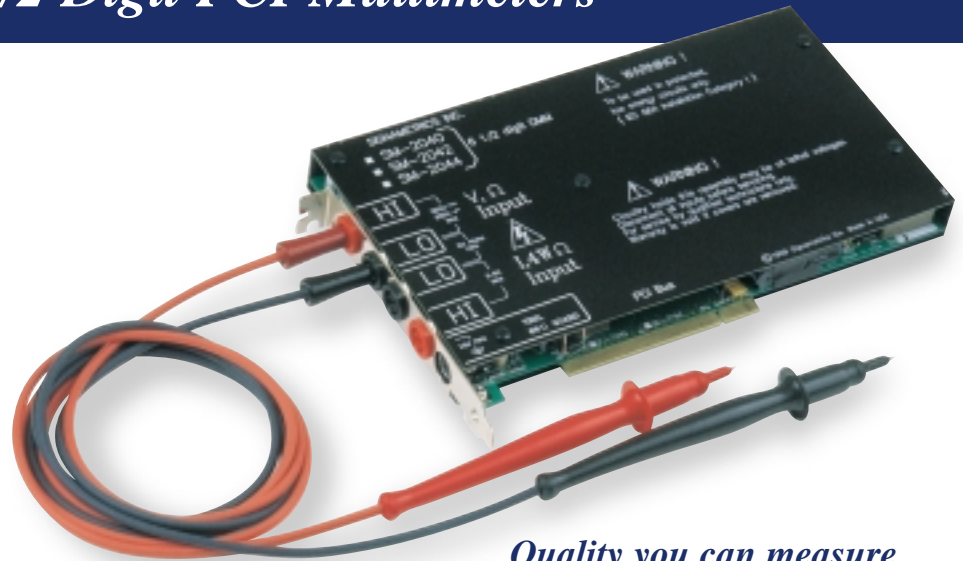

Quality you can measure

Uncompromising Performance

The SM2040 provides a combination of resolution, accuracy and speed that surpasses rivals. A 6-1/2 digit display, 0.0045% basic DCV accuracy and 1,000 rps assure you of measurements that are accurate, fast and repeatable. The SM2042 adds a comprehensive repertoire of measurements, and the SM2044 adds more measurements and sourcing functions, packed into a half-size PCI plug-in module. Both measurements and sourcing functions are isolated from the PC and are therefore truly differential. An on board controller responds to high level commands from the PC, minimizing overhead.

All in one

The SM2040 series is designed as a universal, multifunction DMM. Measurements commonly associated with "high-end" system DMMs are standard features with the SM2040 family. Functions such as 4-wire and 6-wire guarded resistance measurements, inductance and capacitance, leakage and temperature, RMS and peak-to-peak, frequency and timing, sourcing of voltage and current, and much more. The SM2044 is best suited for applications demanding precision sources with simultaneous measurements such as in Parametric testing, while the SM2040 fits the bill where basic DMM functions are required.

The SM2040 series' unique "Relative" function allows you to remove lead resistance or other fixed offsets in your measurement and to perform percent deviation and dB measurements. An external, level controlled trigger can be used for capturing single-shot events, and store up to 64 measurements on board.



■ **SM2040**
*6-1/2 Digit Digital
Multimeter*

■ **SM2042**
*6-1/2 Digit Multi-
Function Digital
Multimeter*

■ **SM2044**
*6-1/2 LCR Sourcing
Digital Multimeter*

Hardware features

- ◆ DC Voltage and Current
- ◆ AC Voltage and Current
 - True RMS
 - Peak-to-Peak
 - Crest Factor
 - Median
- ◆ Resistance
 - 2-wire
 - 4-wire
 - 6-wire Guarded Meas.
 - Extended Meas. to 1GΩ
- ◆ RTD Temperature Meas.
- ◆ Diode V/I Characterization
- ◆ Capacitance Measurement
- ◆ Inductance Measurement
- ◆ Leakage Measurement
- ◆ Time Measurements
 - Variable Threshold
 - Frequency and Period
 - Duty Cycle
 - Pulse Width
 - Totalizer, Event counter
- ◆ Source & Measure Functions
 - DC Voltage
 - AC Voltage
 - DC Current
- ◆ Internal Temperature
- ◆ Environment Friendly
 - Low Power & Heat
 - Minimal Materials Usage

Easy to install and use


The SM2040 series supports Plug-and-Play operating systems. Once installed, your computer will automatically detect and allocate I/O space, without having to set address switches.

Add to this the intuitive Graphical User Interface (GUI), and you are up and making measurements within minutes of installation. Just point and click to perform a wide range of complex measurements.

To further increase productivity and to automate the measurement process, the SM2040 series examples are provided with comprehensive Windows98/95/Me/2000 and NT4.0 support for both textual programming languages such as "C", ATEasy, TestPoint, LabWindows/CVI, MatLab, Delphi etc. and graphical environments such as Visual-Basic, LabView (w/opt. driver), HPVee etc.

6-wire Guarded Resistance Measurement (SM2044)

The SM2044 provides a guarded 6-wire resistance measurement method. It is used to make resistance measurements when the resistor-under-test has other shunting paths which can cause inaccurate readings. This method isolates the resistor-under-test by maintaining a guard voltage at a user defined node. Applications include in circuit test, Resistor Networks, etc.

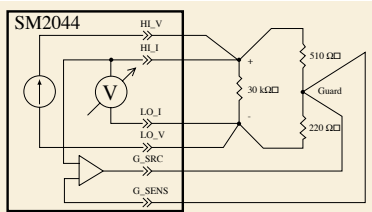

Example: Assume a 30kΩ resistor is in parallel with two resistors (510 Ω and 220 Ω), that are connected in series. By sensing the voltage at the top of the 30 kΩ, and then applying this same voltage to the junction of the 510 Ω and 220 Ω there is no current flow through the shunting path. With this "guarding", the SM2044 accurately measures the 30kΩ resistor.

Extended Resistance (SM2044)

When utilizing the Leakage Measurement configuration, Use the following equation to derive the resistance being measured: $R_x = V_s/I$, where V_s is the DC voltage source, and I is the leakage current being measured. For example, if you set the leakage test voltage to 9.0V and measure 9 nA of leakage current, this corresponds to 1,000 MΩ of resistance. This application is useful for testing cables, printed circuit boards, connectors and semiconductors.

Voltage, Current and Resistance

DC Volt	Range	Full Scale Reading	Resolution	Accuracy 90 Days 23°C ± 5°C [1]	Accuracy 1 Year 23°C ± 5°C [1]
[1] Accuracy is % of reading + Volts.	330mV	330.0000 mV	100 nV	0.004 + 5.5 μV	0.007 + 8 μV
	3.3 V	3.300000 V	1 μV	0.0025 + 12 μV	0.0045 + 17 μV
	33 V	33.00000 V	10 μV	0.004 + 280 μV	0.007 + 330 μV
	330 V	330.0000 V	100 μV	0.005 + 1.2 mV	0.008 + 1.5 mV

DC Current	Range	Full Scale Reading	Resolution	Accuracy 90 Days 23°C ± 5°C [1]	Accuracy 1 Year 23°C ± 5°C [1]
[1] Accuracy is % of reading + Amps. 330nA range available.	3.3 mA	3.30000 mA	10 nA	0.07 + 350 nA	0.1 + 400 nA
	33 mA	33.0000 mA	100 nA	0.06 + 2 μA	0.1 + 3 μA
	330 mA	330.000 mA	1 μA	0.055 + 40 μA	0.075 + 60 μA
	2.5A	2.50000 A	10 μA	0.6 + 200 μA	0.65 + 350 μA

AC Volts (RMS)	Range	Full Scale Reading	Resolution	Frequency	Accuracy 90 Days 23°C ± 5°C [1]	Accuracy 1 Year 23°C ± 5°C [1]
[1] Accuracy is % of reading + Volts. [2] Signal is limited to 8x10 ⁶ Volt Hz Product..	330 mV (Signal >5 mV)	330.0000 mV	100 nV	10 Hz - 20 Hz	3.1 + 380 μV	3.2 + 430 μV
				20 Hz - 47 Hz	0.93 + 170 μV	0.95 + 200 μV
				47 Hz - 10 kHz	0.14 + 110 μV	0.15 + 120 μV
				10 kHz - 50 kHz	0.6 + 200 μV	0.63 + 230 μV
	3.3 V (Signal >10 mV)	3.300000 V	1 μV	50 kHz - 100 kHz	5.4 + 370 μV	5.6 + 400 μV
				10 Hz - 20 Hz	3.1 + 2.2 mV	3.2 + 2.5 mV
				20 Hz - 47 Hz	0.96 + 1.5 mV	1.0 + 1.7 mV
				47 Hz - 10 kHz	0.055 + 1.1 mV	0.065 + 1.2 mV
	33 V (Signal >100 mV)	33.00000 V	10 μV	10 kHz - 50 kHz	0.65 + 1.3 mV	0.7 + 1.5 mV
				50 kHz - 100 kHz	5.2 + 1.7 mV	5.3 + 2 mV
				10 Hz - 20 Hz	3.1 + 16 mV	3.3 + 20 mV
				20 Hz - 47 Hz	0.96 + 14 mV	1.0 + 16 mV
	250 V [2] (Signal >1 V)	250.0000 V	100 μV	47 Hz - 10 kHz	0.065 + 11 mV	0.073 + 13 mV
				10 kHz - 50 kHz	0.33 + 21 mV	0.35 + 25 mV
				50 kHz - 100 kHz	2.2 + 35 mV	2.4 + 40 mV
				10 Hz - 20 Hz	3.1 + 160 mV	3.3 + 200 mV
			20 Hz - 47 Hz	0.96 + 130 mV	1.0 + 150 mV	
			47 Hz - 10 kHz	0.045 + 110 mV	0.06 + 130 mV	
			10 kHz - 50 kHz	0.4 + 170 mV	0.45 + 200 mV	
			50 kHz - 100 kHz	2.8 + 240 mV	3.2 + 300 mV	

AC Current (RMS)	Range	Full Scale Reading	Resolution	Frequency	Accuracy 90 Days 23°C ± 5°C [1]	Accuracy 1 Year 23°C ± 5°C [1]
[1] Accuracy is % of reading + Amps.	3.3 mA (Signal >50 uA)	3.30000 mA	1 nA	10 Hz - 20 Hz	2.7 + 4 μA [1]	2.9 + 4 μA [1]
				20 Hz - 47 Hz	0.9 + 4 μA	1.0 + 4 μA
				47 Hz - 1 kHz	0.08 + 3 μA	0.12 + 4 μA
				1 kHz - 10 kHz	0.14 + 4 μA	0.22 + 4 μA
	33 mA (Signal >500 uA)	33.0000 mA	10 nA	10 Hz - 20 Hz	2.6 + 30 μA	2.8 + 30 μA
				20 Hz - 47 Hz	0.9 + 30 μA	1.0 + 30 μA
				47 Hz - 1 kHz	0.15 + 20 μA	0.16 + 30 μA
				1 kHz - 10 kHz	0.3 + 40 μA	0.4 + 40 μA
	330 mA (Signal >5 mA)	330.000 mA	100 nA	10 Hz - 20 Hz	2.7 + 400 μA	2.8 + 400 μA
				20 Hz - 47 Hz	0.9 + 400 μA	1.0 + 400 μA
				47 Hz - 1 kHz	0.17 + 180 μA	0.22 + 220 μA
				1 kHz - 10 kHz	0.4 + 350 μA	0.6 + 400 μA
	2.5 A (Signal >50 mA)	2.50000 A	1 μA	10 Hz - 20 Hz	2.5 + 4.5 mA	2.7 + 5 mA
				20 Hz - 47 Hz	0.8 + 6 mA	0.9 + 6 mA
				47 Hz - 1 kHz	0.63 + 3.8 mA	0.65 + 4 mA
				1 kHz - 10 kHz	0.62 + 4.5 mA	0.7 + 5 mA

Resistance 2-wire and 4-wire Ohms	Range	Full Scale Reading	Current Source	Resolution	Accuracy 90 Days 23°C ± 5°C [1] [2]	Accuracy 1 Year 23°C ± 5°C [1] [2]
[1] Accuracy is % of reading + Ohms. [2] With reading rate set to 2 rps, within one hour of Ohms zero, using Relative control. [3] 4-wire ohms is available to 330 kΩ range. [4] only available with the SM2042/44.	33 Ω [4]	33.00000 Ω	10 mA	10 μΩ	0.005 + 1.5 mΩ	0.008 + 2 mΩ
	330 Ω	330.0000 Ω	1 mA	100 μΩ	0.0046 + 5 mΩ	0.007 + 6 mΩ
	3.3 kΩ	3.300000 kΩ	1 mA	1 mΩ	0.003 + 32 mΩ	0.005 + 33 mΩ
	33 kΩ	33.00000 kΩ	100 μA	10 mΩ	0.0033 + 330 mΩ	0.006 + 350 mΩ
	330 kΩ [3]	330.0000 kΩ	10 μA	100 mΩ	0.007 + 4 Ω	0.009 + 5 Ω
	3.3 MΩ	3.300000 MΩ	1 μA	1 Ω	0.04 + 75 Ω	0.05 + 80 Ω
	33 MΩ	33.0000 MΩ	100 nA	100 Ω	0.24 + 900 Ω	0.26 + 1 kΩ
	330 MΩ [4]	330.00 MΩ	10 nA	10 kΩ	1.8 + 60 kΩ	2.0 + 80 kΩ

Temperature (SM2042 and SM2044)

Temperature	RTD Type [1]	Ro (Ω)	Resolution	Temperature range	Accuracy 23°C ± 5°C One Year [1]
[1] These specifications are valid for 4-wire type RTD.	pt385, pt3911, pt3916, pt3926	100 Ω, 200 Ω	0.01 °C	-150 to 650 °C	±0.06 °C
	pt385, pt3911, pt3916, pt3926	500 Ω, 1 kΩ	0.01 °C	-150 to 650 °C	±0.03 °C
	Cu (Copper)	Less than 12 Ω	0.01 °C	-100 to 200 °C	±0.18 °C for temp. ≤ 20°C, otherwise ±0.05 °C
	Cu (Copper)	Higher than 90 Ω	0.01 °C	-100 to 200 °C	±0.10 °C for temp. ≤ 20°C, otherwise ±0.05 °C

Leakage (SM2044)

Leakage	Leakage reading	Voltage range	Accuracy 23°C ± 5°C One Year [1]
[1] Accuracy is % of reading + Amp. Error does not include external shunt resistor's tolerance.	1.00 nA to 100.00 nA	-10 V to +10 V	2 + 350 pA
	100.00 nA to 1000.00 nA	-9 V to +9 V	1.2 + 2 nA
	1000.00 nA to 3300.00 nA	-7 V to +7 V	1.5 + 20 nA

Peak to Peak, Crest and Median (SM2042, SM2044)

ACV P-P [2]	ACV Range	Full Scale reading (Vp-p)	Resolution	Lowest specified input voltage (Vp-p)	Accuracy 23°C ± 5°C One Year [1]
[1] Accuracy is % of reading + Volts	330 mV	1.85 V	1 mV	0.1 V	1.5 ± 10 mV
[2] Specified from 30Hz to 10kHz.	3.3 V	18.5 V	10 mV	1 V	1.4 ± 70 mV
	33 V	185 V	100 mV	10 V	1 ± 700 mV
	250 V	850 V	1 V	100 V	1 ± .6 V

AC Crest Factor [2]	ACV Range	Resolution	Lowest specified input voltage (Vp-p)	Highest specified input voltage (Vp-p)	Accuracy 23°C ± 5°C One Year [1]
[1] Accuracy is % of reading + Constant.	330 mV	0.01	0.1 V	1.8 V	2.2 ± 0.3
[2] Specified from 30Hz to 10kHz.	3.3 V	0.01	1 V	18 V	2.1 ± 0.1
	33 V	0.01	10 V	180 V	2 ± 0.1
	250 V	0.01	100 V	700 V	2 ± 0.1

AC Median [2]	ACV Range	Full Scale reading	Resolution	Lowest specified input voltage (Vp-p)	Accuracy 23°C ± 5°C One Year [1]
[1] Accuracy is % of reading + Volts.	330 mV	± 0.950 V	1 mV	0.08 V	3.3 ± 17 mV
[2] Specified from 30Hz to 10kHz.	3.3 V	± 9.50 V	10 mV	0.8 V	3 ± 160 mV
	33 V	± 95.0 V	100 mV	8 V	3 ± 1.4V
	250 V	± 425 V	1 V	80 V	3% ± 12V

Timing Function (SM2042, SM2044)

Timing Threshold DAC	Selected VAC range	Threshold Range	Threshold DAC Resolution	Typical one year setting uncertainty [1]
[1] Accuracy ± (% of setting + volts).	330mV	-1.0V to +1.0V	0.5 mV	0.2% + 4mV
	3.3 V	-10.0V to +10.0V	5.0 mV	0.2% + 40mV
	33 V	-100.0V to +100.0V	50 mV	0.2% + 0.4mV
	250 V	-500V to +500V	500 mV	0.2% + 4V

ACV Frequency	Frequency Range	1 Hz - 100 Hz	100 Hz - 1 kHz	1 kHz - 10 kHz	10 kHz - 100 kHz	100 kHz - 300 kHz
[1] Input RMS voltage required for a valid reading. For example, 10% - 200% of range indicates that in the 330 mVAC range, the input voltage should be 33 mV to 660 mV.	Resolution	1 mHz	10 mHz	100 mHz	1 Hz	1 Hz
	Uncertainty is ±0.002% of reading ± adder shown	4 mHz	20 mHz	200 mHz	2 Hz	5 Hz
	Input Signal Range [1]	10 - 200% of range	10 - 200% of range	10 - 200% of range	10 - 200% of range	25 - 200% of range

ACI Frequency	Frequency Range	1 Hz-100 Hz	100 Hz-1 kHz	1 kHz-10 kHz	10 kHz-500 kHz
	Resolution	1 mHz	10 mHz	100 mHz	1 Hz
	Uncertainty	0.01% ± 4 mHz	0.01% ± 20 mHz	0.01% ± 200 mHz	0.01% ± 2 Hz
	Input Signal Range, 3.3 mA Range	10% - 500%	10% - 500%	10% - 500%	10% - 500%
	Input Signal Range, 33 mA Range	50% - 100%	50% - 100%	50% - 100%	50% - 100%
	Input Signal Range, 330 mA, 2.5A ranges	50% - 110%	50% - 100%	50% - 100%	50% - 100%

Duty Cycle	Frequency Range	1Hz to 100Hz	100Hz to 1kHz	1kHz to 10kHz	10kHz to 100kHz
	Resolution	0.02%	0.2%	2%	20%
	Typical Uncertainty is ±0.03% of reading ± adder shown	0.03%	0.3%	3%	20%
	Full scale reading	100.00 %	100.00 %	100.00 %	100.00 %

Pulse Width	Polarity	Frequency range	Resolution	Width range	Uncertainty
	Positive and Negative pulse	1 Hz to 100 kHz	2 μS	2 μS to 1S	0.01% ± 4 μS

Capacitance Measurements (SM2042, SM2044)

Capacitance	Range	Full Scale Reading	Resolution	Accuracy One Year 23°C ± 5°C [1]
[1] Accuracy is % of reading + Farads.	10 nF	11,999 pF	1 pF	2.1 ± 5 pF [2]
[2] Within one hour of zero, using Relative control. Accuracy is specified for values higher than 5% of the selected range with the exception of the 10 nF range, which is capable of measuring down to 0 pF.	100 nF	119.99 nF	10 pF	1
	1 μF	1.1999 μF	100 pF	1
	10 μF	11.999 μF	1 nF	1
	100 μF	119.99 nF	10 nF	1
	1 mF	1.1999 mF	100 nF	1
	10 mF	11.999 mF	1 μF	2

Inductance Measurements (SM2044)

Inductance	Range	Full Scale Reading	Resolution	Default Frequency	Accuracy One Year 23°C ± 5°C [1]
[1] Accuracy is % of reading + Henry.	33 μH	33.00 μH	1 nH	75 kHz	3 + 500 nH [2]
[2] Accuracy is specified for values greater than 5% of the selected range.	330 μH	330.0 μH	10 nH	50 kHz	2 + 3 μH
[3] Minimum measurable 500 nH.	3.3 mH [3]	3.300 mH	100 nH	4 kHz	1.5 + 25 μH
	33 mH	33.00 mH	1 μH	1.5 kHz	1.5 + 200 μH
	330 mH	330.0 mH	10 μH	1 kHz	2.5 + 3 mH
	3.3 H	3.300 H	100 μH	100 Hz	3 + 35 mH

Internal Temperature (SM2042, SM2044)

A special on-board temperature sensor allows monitoring of the DMM's internal temperature. This provides the means to determine when to run the self-calibration function (S-Cal) for the DMM, as well as predicting the performance of the DMM under different operating conditions. When used properly, this measurement can enhance the accuracy and stability of the DMM. It also allows monitoring of the PC internal temperature.

Capacitance Measurement (SM2042, SM2044)

The SM2042/44 measures capacitance using a differential charge slew method, usable down to a few pF. With the exception of the 10 nF range, each of the ranges has a reading span from 5% of range to full scale. For testing surface mount parts, use the optional Signametrics SMT Tweezer probes.

Inductance Measurement (SM2044)

The SM2044 measures inductance using a precision AC source with a frequency range of 20 Hz to 75 kHz. Since inductors can vary greatly with frequency, you should choose the appropriate generator frequency. In addition to inductance, the inductor's Q factor is measured.

Sourcing Functions (SM2044)

The SM2044 adds a number of sourcing functions, giving great versatility for a variety of applications. All of the available sources, VDC, VAC, and IDC are isolated. This allows sourcing with a significant common mode voltage as well as the ability to connect several SM2044 units in parallel for increased DC current, or in series for increased DC voltage.

Two D/A converters (DACs) are used for the source functions, a 12 bit DAC, and a Trim DAC. The last augments the 12 bit DAC to form a 16 bit composite DAC. For functions requiring high precision, use both DACs by selecting the ClosedLoop mode, otherwise only the 12 bit DAC is engaged.


Software Compatability

The Signametrics products are designed to be compatible with most Windows® S/W including VisualBasic®, “C++”, HPVee®, ATEasy®, Matlab®, TestPoint®, LabWindows®, LabView® and other packages. Also provided is a VisualBasic® panel with sources and plug-and-play setup.

Company Background

The Signametrics design team has many years of experience designing brand name bench top instruments. That experience has resulted in a family of PC instruments that maintain accuracy and performance. Signametrics instruments are designed to sustain, without damage, the inevitable over voltage events that occur with bench top instruments. Attention to reliability in the design phase results in instruments that demonstrate over 1,000,000 hours MTBF in operation.

Other specifications

Temperature Coefficient	All Functions Less than 0.1 x accuracy specification per °C at 23°C ± 5°C. Specifications assume a zero operation performed within an hour of measurement, and Self Cal within four hours.
Reading Rate	(user selectable) 0.5 to 1,000 rps up to 10 rps, 6-1/2 digits up to 30 rps, 5-1/2 digits
Hardware Interface	PCI Bus
Overload Protection	(voltage inputs) 300 VDC, 250 VAC (DIN Connector) 50 VAC
Isolation	300 VDC, 250 VAC from Earth Ground
Maximum Input (Volt x Hertz)	8x10 ⁶ Volt x Hz Common Mode input (across Voltage HI & LO). 1x10 ⁶ Volt x Hz Common Mode input (across Voltage HI & LO relative to Earth Ground).
Safety	Designed to IEC 1010-1 guidelines, for IEC 664 Installation Category II. All DMM inputs are to be used in protected, low energy circuits only. 
Calibration	Calibrations are performed by Signametrics in a computer with a 10°C internal temperature rise. All calibration constants are stored in a text file. Calibration can be performed by any calibration laboratory having the appropriate equipment.
Temperature Range	0°C to 50°C, operating
Power	+5 VDC, 300 mA maximum
Size	8.2" X 4.4"

Warranty

Signametrics products are warranted for a period of one years from date of delivery against defects in material or workmanship. Returned products will either be repaired or replaced at Signametrics' discretion.

Guarantee

If, for whatever reason, you are not satisfied with your Signametrics purchase, please return it within 30 days for a refund.

AC/DC Voltage Source and Current Source (SM2044)

DC Voltage Source	Parameter	Closed Loop	Open Loop
[1] Accuracy is % of reading + Volts	Output Voltage range	-10.000V to +10.000V	
	Maximum Current source/sink	10 mA	
	DAC resolution	16 bits	12 bits
	Accuracy 23°C ± 5°C One Year [1]	0.015% ± 250 µV	0.13% ± 35 mV
	Typical settling time	3S	2 mS
	Typical source resistance	250 Ω	

AC Voltage Source	Parameter	Closed Loop	Open Loop
[1] Accuracy is % of reading + Volts	Output Voltage	0 to 20 V peak-to-peak (0 to 7.071068V RMS)	
	DAC resolution	16 bits	12 bit
	Peak Current	10 mA	
	Accuracy 23°C ± 5°C One Year [1]	ACV spec ± 2 mV	ACV spec + 0.8% ± 8 mV
	Typical settling time	10 S	1.5 S
	Typical source resistance	250 Ω	
	Frequency range / resolution	2 Hz to 75 kHz / 2 Hz	
	Frequency stability	100 ppm ± 1 Hz	

DC Current Source	Range	Compliance Voltage	Resolution	Minimum level	Accuracy 23°C ± 5°C One Year [1]
[1] Accuracy is % of reading + Amps	1.25 µA	4.2 V	400 pA	1 nA	0.2% + 1 nA
	12.5 µA	4.2 V	4 nA	10 nA	0.1% + 10 nA
	125 µA	4.2 V	40 nA	100 nA	0.1% + 100 nA
	1.25 mA	4.2 V	400 nA	1 µA	0.1% + 1 µA
	12.5 mA	4.0 V	4 µA	10 µA	0.1% + 10 µA

Input Characteristics

DC Volts		
	Input Resistance	
	330 mV & 3.3 V Ranges	>10 GΩ
	33 V & 330 V Ranges	10 MΩ
Noise Rejection		
NMRR	50, 60, 400Hz	>95 dB
CMRR	@ ≤10 rps with 1 kΩ lead imbalance	>120 dB
DC Current		
	Burden Voltage	< 350 mV for all ranges
	Over Current Protected	fuse, top accessible
AC Volts		
	Input Resistance	1 MΩ, shunted by < 100 pF, all ranges
	Crest Factor	3 at Full Scale, increasing to 7 at Lowest Specified Voltage
	AC coupled Specified range:	10 Hz to 100 kHz
	Typical Settling time	< 0.5 sec to within 0.1% of final value
	CMRR @ ≤10 rps with 1 kΩ lead imbalance	>60 dB.
AC Current		
	Burden Voltage	350 mV RMS all Ranges
	Crest Factor	3 at Full Scale, increasing to 7 at Lowest Specified Current
	Over Current Protected	2.5 A fuse. top accessible
Trigger Input		
	Input active voltage level range	+3 V to +15 V
	Minimum input current	1 mA
	Timing Characteristics	Trigger occurs within 1/reading rate
	Isolation	±35 V from analog DMM inputs, and from computer chassis earth ground.

Note: Signametrics reserves the right to make changes in materials, specifications, product functionality or accessories without notice.

Signametrics

Precision Instruments for the PC

6073 50th Avenue N.E., Seattle, WA 98115
Phone (206) 524-4074, Fax (206) 525-8578
www.signametrics.com