



## PCM-4335 STPC Client DX-66

LCD

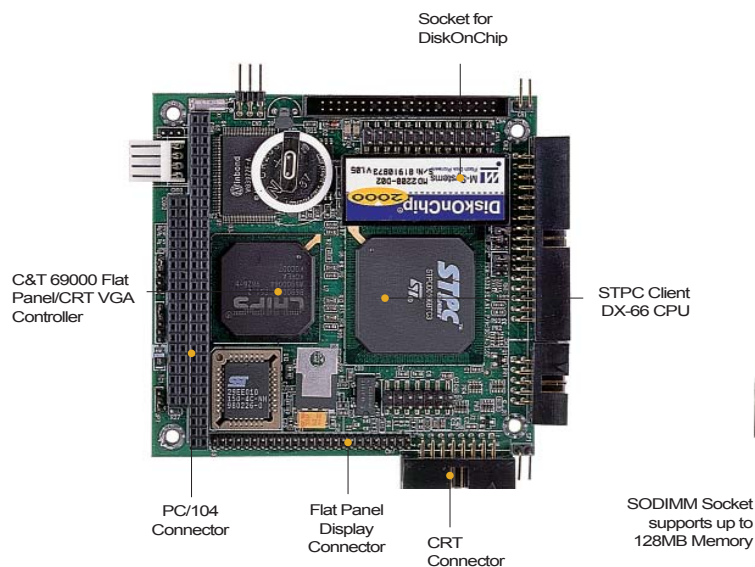

### Features

- Onboard STPC Client DX-66 CPU
- C&T 69000 LCD controller supports 36-bit TFT Panels
- Onboard SODIMM socket supports up to 64MB EDO DRAM
- Onboard watchdog timer with selectable time-out interval

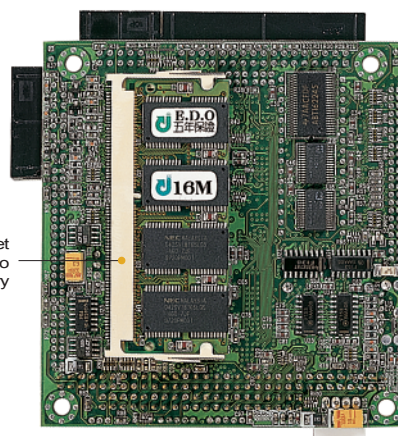

### Specifications

#### System

- |                         |  |
|-------------------------|--|
| ■ CPU                   | STPC Client DX-66                                |
| ■ System Memory         | Supports Fast Page Mode & EDO DRAM up to 64MB    |
| ■ Chipset               | STPC Client                                      |
| ■ I/O Chipset           | Winbond W83977F. Fully 16-bit I/O decoded        |
| ■ BIOS                  | AMI 128KB FLASH BIOS                             |
| ■ SSD                   | Supports DiskOnChip® up to 1GB                   |
| ■ Watchdog Timer        | Can generate a system reset. 0.5min/step         |
| ■ Battery               | Lithium battery                                  |
| ■ DMA                   | 7 DMA channels (8237 equivalent)                 |
| ■ Interrupt             | 15 interrupt levels (8259 equivalent)            |
| ■ Power Supply Voltage  | +5V (4.75V to 5.25V)                             |
| ■ Size/ Weight          | 3.55" (L) x 3.775" (90mm x 96mm), 0.6lb (0.25kg) |
| ■ Operating temperature | 32°F to 140°F (0°C to 60°C)                      |

#### I/O

- |       |   |
|-------|---|
| ■ MIO | IDE x 1, FDD x 1, KB+Mouse x 1, RS-232 x 1, RS-232/422/485 x 1, Parallel x1 |
|-------|---|

#### Display

- |                 |                                      |
|-----------------|--------------------------------------|
| ■ Chip          | C&T 69000                            |
| ■ Memory Size   | Built-in 2MB SDRAM                   |
| ■ Resolution    | Up to 1024 x 768@ 16bpp colors       |
| ■ LCD Interface | Up to 36-bit TFT/DSTN/MONO LCD panel |

### Packing List

- IDE cable
- FDD cable
- Serial Port cable
- Parallel Port cable
- KB/Mouse cable
- CRT cable 9681433500
- Quick Installation Guide
- Utility CD