







SB-162A

1U Server Barebone with VGA/3xLAN/SCSI for Dual PIII CPU

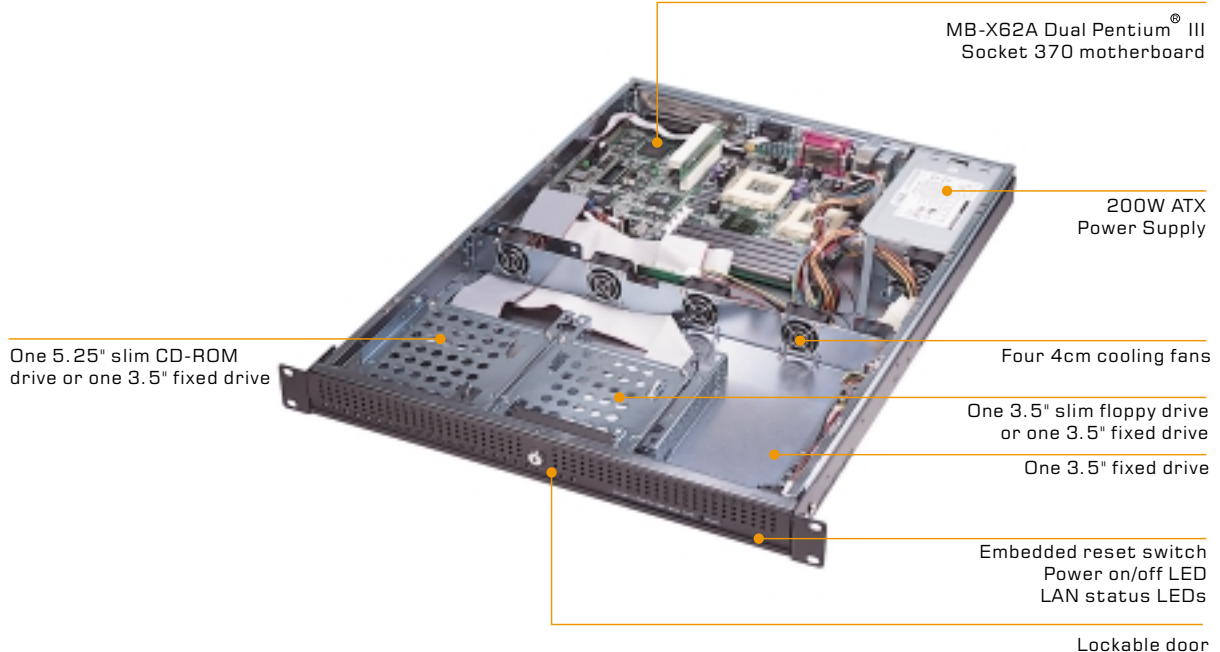

OPTIONAL

	Item	24 Slide rail
	Part Number	S01PACKING096
	Item	SCSI Ultra 160 68P 1 to 3 cable
	Part Number	0800500780003
	Item	Slim CPU cooler
	Part Number	0820103M00001
	Item	Slim 5.25" 24X CD-ROM
	Part Number	PTR24X0000001
	Item	Slim 3.5" FDD
	Part Number	PTY702J663001

FEATURES

- 19" 1U Server
- Included 1U chassis, Dual CPU motherboard and 200W ATX power supply
- Support Dual Intel® Pentium® III processors with 133MHz FSB
- Four DIMM sockets, support up to 2GB SDRAM
- Three 10/100 Base-TX Ethernet ports
- Dual Channel SCSI controller, support Ultra 160 SCSI
- Support one slim CD-ROM & FDD drives, and three internal 3.5" HDD drives
- With 3 LAN LEDs to indicate the status of LAN


1U Server Barebone with
VGA/3xLAN/SCSI for Dual PIII CPU



SB-162A

SPECIFICATION

Construction	Heavy duty steel, 19" Rackmount 1U chassis
Disk Drive Bays	Support one slim 3.5" removable drive and one slim 5.25" CD-ROM removable drive, three 3.5" fix drives
Cooling Fan	Four 4cm DC Fans (10.5 CFM)
Controls	Power ON/OFF, Reset switches
Status Indicators	Power ON/OFF, HDD and LAN status
Speaker	One Internal Buzzer
Dimension (HxWxD)	44x483x618mm (1.75"x19"x24.3")
Weight	7.6kg

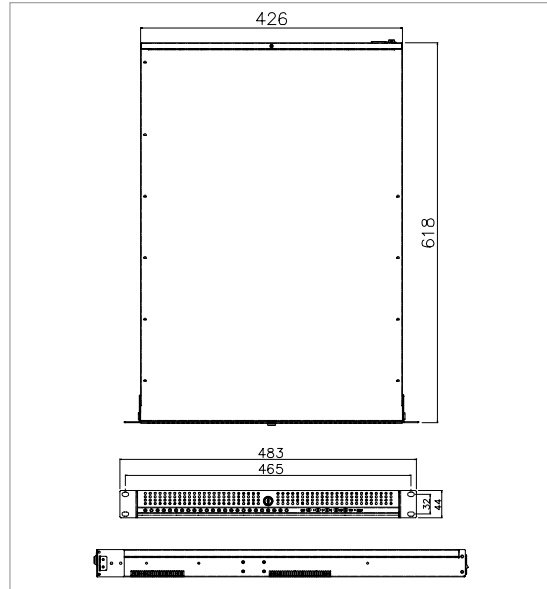

..... Front View



..... Back View



..... Top View

Included Motherboard - MB-X62A

- Support dual Intel® Pentium® III / one Celeron™ CPU in Socket 370, running up to 933MHz at 133 MHz FSB.
- VIA 694X/686A chipset, and Winbond 977TF I/O Chipset
- Four DIMM sockets, support up to 2GB SDRAM
- ATI Rage XL AGP VGA Controller
- Dual Channel Ultra 3 SCSI
- Three 10/100 Base-TX interface, on-board RJ-45 connector, support Wake on LAN function
- One PCI expansion slot

Included Power Supply

- JET-216AP 200W ATX power supply

Environmental Specification

- Operating Temperature: 0°C to 50°C
- Relative Humidity: 5% to 95%, non-condensing
- Altitude: 10,000ft (3,000m)
- Vibration: 1.5G Max and 0.1" p-p at 5 to 500Hz
- Shock: 10G peak acceleration (10m/sec)
- EMI: FCC Class A and CE

ORDERING INFORMATION

Model	W/Motherboard	W/Power Supply
SB-162A	MB-X62A (With VGA/3LAN/SCSI)	JET-216AP
SB-162B	MB-X62B (With VGA/3LAN)	