Busworks[®] Ethernet I/O





972/973EN Analog Output

4 or 6-Channel Output: DC Current or DC Voltage Signals

Models

972EN: DC current output channels **973EN**: DC voltage output channels

Description

These modules provide up to six channels of analog output. Multi-range outputs support a wide variety of industrial devices. They can drive displays and recorders, control drives, or send analog signals to other systems. High-resolution, low noise, D/A converters deliver high accuracy and reliability. 3-way isolation further improves system performance.

Output Ranges

DC Current (user-selectable ranges) 0 to 1mA, 0 to 20mA, or 4 to 20mA

DC Voltage (user-selectable ranges) 0 to 1V, 0 to 5V, or 0 to 10V DC

Network Communication


Ethernet Modbus/TCP 10/100Mbps network

Power Requirement

15 to 36V DC supply required

Approvals

CE marked. UL, cUL listed (pending). Class I; Division 2; Groups A, B, C, D (pending).



Standard model includes cage clamp terminal blocks. Optional terminals are available (see ordering information).

Special Features

- Configurable from standard web browser
- Modbus/TCP communication with automatic 10/100Mbps data rate negotiation
- 6-input stand-alone module has much lower start-up cost than multi-piece block I/O systems
- Universal DC outputs support a wide variety of signals and industrial devices
- Three selectable failsafe modes (0%, last-state, or pre-defined) help prevent unsafe conditions
- Compact packaging with pluggable terminals saves space and simplifies wiring
- Wide operational temperature range permits installation in extreme environments

Performance

General Specifications

See Page 11 for communication and other specs.

Configuration Output ranges selectable on channel to channel basis.

Output

Accuracy Better than ±0.1% of span, typical. 1.6% for 0 to 1mA range. 0.8% for 0 to 1V range.

Digital to Analog Converter (D/A) 12-bit converter.

Current Output Compliance 12V minimum, 13V typical.

Current Output Load Resistance Range 0 to 625 ohms, typical.

Voltage Output Source Current 0 to 10mA DC, maximum.

Environmental

Ambient Temperature

Operating: 972EN-200x models -25 to 60°C (-13 to 158°F). 973EN-200x models: -25 to 70°C (-13 to 140°F). Storage: -40 to 85°C (-40 to 185°F).

Relative Humidity

5 to 95%, non-condensing.

Isolation

1500V AC for 60 seconds or 250V AC continuous. 3-way isolation between I/O, network, and power. Outputs share a common.

Ordering Info

Models

972EN-4004 DC current output module, 4 channels

972EN-4006 DC current output module, 6 channels

973EN-4004 DC voltage output module, 4 channels

973EN-4006 DC voltage output module, 6 channels

Accessories (See Pages 12-14) 900EN-S005

Ethernet switch, 5-port

5035-355 Ethernet cable, CAT5, 3 feet long

5035-360

Ethernet crossover cable, CAT5E, 5 feet long, shielded

PS5R-D24 Power supply (24V DC, 2.1A).

TBK-B03

Optional terminal block kit, barrier strip style, 4 pcs. TBK-S03

Optional terminal block kit, spring clamp style, 4 pcs.

Acromag 🎦 Tel: 248-624-1541 Fax: 248-624-9234 e-mail: sales@acromag.com www.acromag.com

BusWorks[®] Ethernet I/O



General Operation and Performance Specifications

The following specifications are common to all 900EN Series I/O modules.

Communication

Connector

Shielded RJ-45 sockets, 8-pin, 10BaseT/100BaseTX.

Wiring

Wired MDI. Unit does NOT support auto-crossover.

Protocol Modbus TCP/IP with web browser configuration.

IP Address Default static IP address is 128.1.1.100.

Port Up to 10 sockets supported.

Data Rate Auto-sensed, 10Mbps or 100Mbps.

Duplex Auto-negotiated, full or half-duplex.

Compliance IEEE 802.3, 802.3u, 802.3x.

Modbus TCP/IP Protocol Support

Up to 10 sockets may be selected. Web page for configuration and control is built-in with Ethernet access via a standard web browser.

Rx/Tx Memory

8K bytes internal SRAM memory for receive and transmit buffers (FIFO).

Communication Distance

Distance between network devices is generally limited to 100 meters using recommended cable. Distances may be extended using hubs and switches.

Address

IP address is automatically acquired at startup. Unit may be configured to retrieve this address from the network server using BOOTP (Bootstrap Protocol), or via DHCP (Dynamic Configuration Protocol). A static IP address is user-programmable. A default toggle switch sets the static IP address to the default factory address of 128.1.1.100.

Environmental

Isolation

I/O channel, power, and network circuits are isolated from each other for common-mode voltages up to

250VAC, or 354V DC off DC power ground, on a continuous basis (will withstand 1500VAC dielectric strength test for one minute without breakdown). Complies with test requirements of ANSI/ISA-82.01-1988 for voltage rating specified.

Electromagnetic Compatibility (EMC)

Immunity per European Norm EN50082-1. Emissions per European Norm EN50081-1.

Electrostatic Discharge (ESD) Immunity Per EN61000-4-2.


Radiated Field Immunity (RFI) Per EN61000-4-3 and ENV50204.

Electrical Fast Transient Immunity (EFT) Per EN61000-4-4.

Conducted RF Immunity (CRFI) Per EN61000-4-6.

Surge Immunity Per EN61000-4-5.

Radiated Frequency Emissions Per EN55022 Class B.

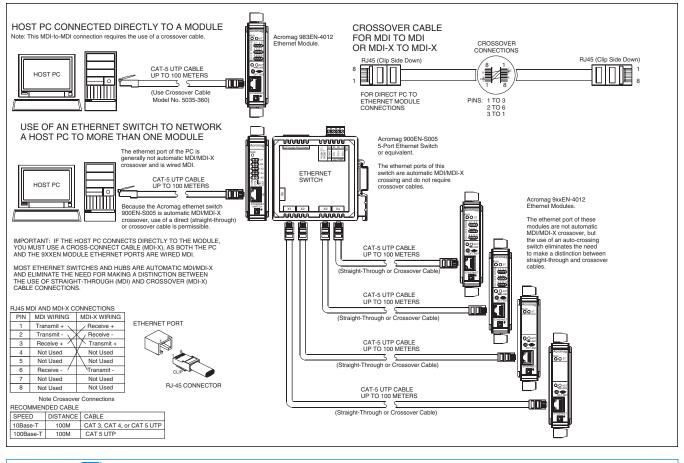

Acromaq 2

Tel: 248-624-1541 Fax: 248-624-9234 e-mail: sales@acromag.com www.acromag.com