

Approved	Checked	Designed	DEVELOPMENT SPECIFICATION	TEMPORARY
		T. Tabata		

T Y P E	Pure Green Light Emitting Diode					
APPLICATION	Indicators					
MATERIAL	GaN					
OUTLINE	Attached					
ABSOLUTE MAXIMUM RATINGS	P	*1 I <sub>FP</sub>	I <sub>FDC</sub>	V <sub>R</sub>	Topr	Tstg
	40	50	10	5	-25~+85	-30~+100
	mW	mA	mA	V	°C	°C
CONDITION	Ta=25±3°C					


Test Specification

I t e m	Symbol	C o n d i t i o n	Typ	Limit		Unit
				Min	Max	
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> = 5mA	3.0		3.7	V
Reverse Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 5V			10	μA
Luminous Intensity *2	I <sub>O</sub>	I <sub>F</sub> = 5mA DC	51	27.2		mcd
Peak Emission Wavelength	λ <sub>p</sub>	I <sub>F</sub> = 5mA DC	525			nm
Spectral Line Half Width	Δλ	I <sub>F</sub> = 5mA DC	45			nm

- \*1. The Condition of I<sub>FP</sub> is duty 10%, Pulse width 1 ms
- \*2. Tolerance of luminous intensity: ±20%.

NOTE

- ★1. Please contact the Panasonic local office if you design at low current (below 1mA DC) or pulse current operation and have any questions.
- ★2. Soldering conditions.....Refer to Handling note.
- ★3. Compositions of the lead ..... Cu/Ni/Au plating
- ★4. Beware of destruction by static electricity in handling the LED.
- ★5. Circuit to operate LED.



(A) Recommended circuit.  
 (B) The difference of brightness between the LED could be found due to the V<sub>F</sub> characteristics of each LED.





Oct. 24. 2001			

Approved	Checked	Designed
		T. Tabata

DEVELOPMENT SPECIFICATION

P/N:LNJ616C8WRA

TEMPORARY

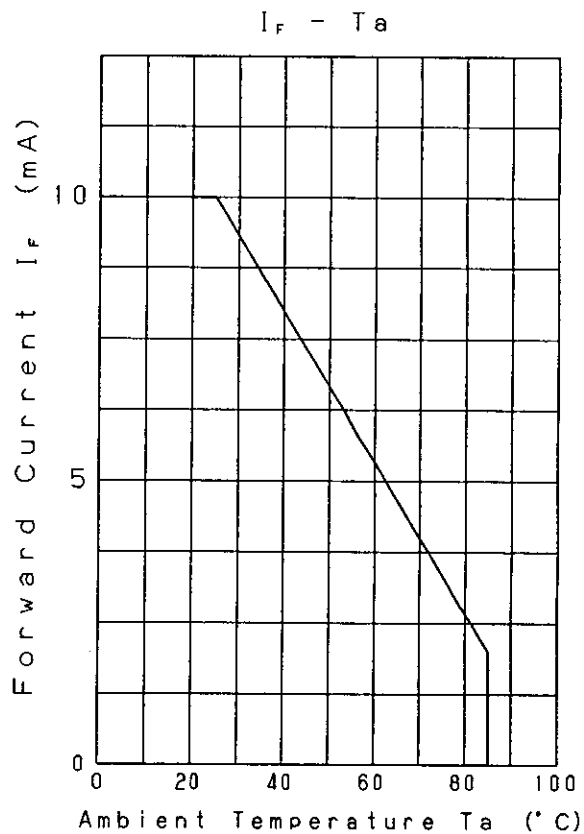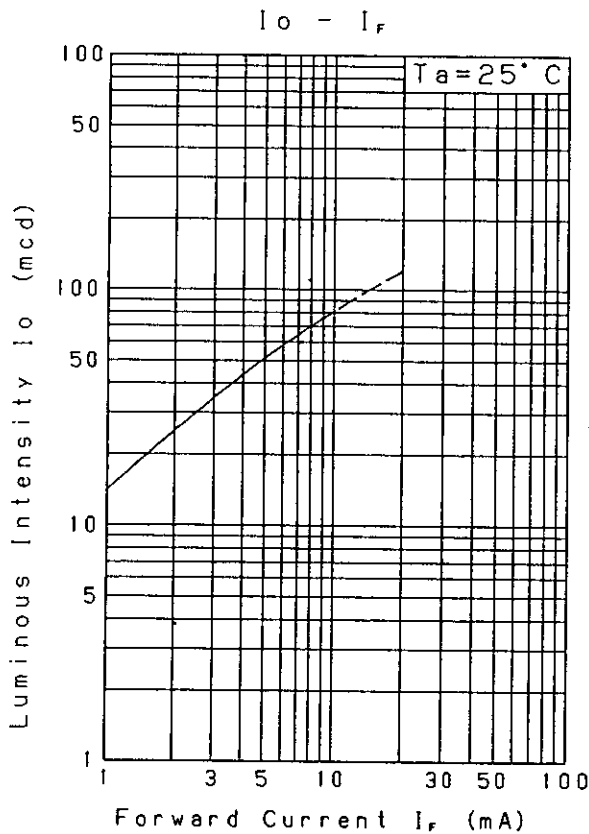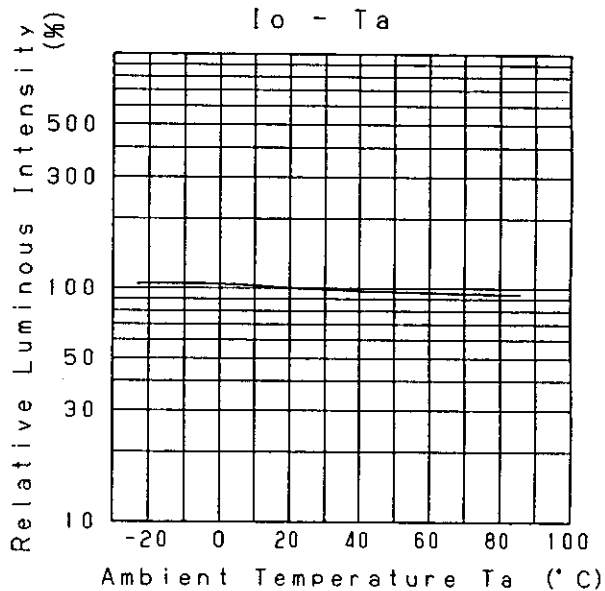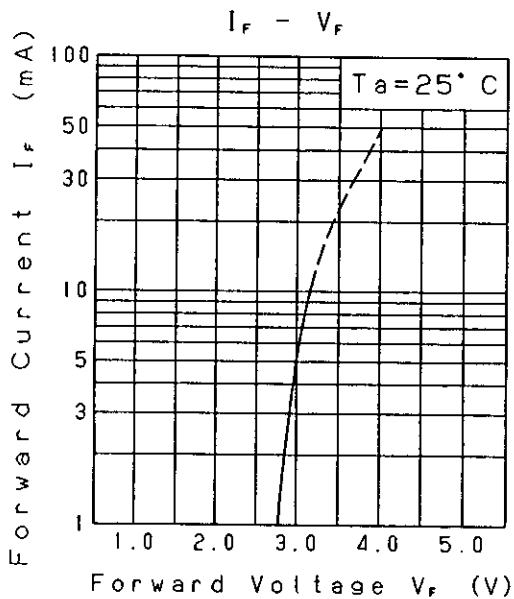

Nov. 7. 2001


Approved	Checked	Designed
		<i>T. Tabata</i>

DEVELOPMENT SPECIFICATION


P/N: LNJ616C8WRA

TEMPORARY

Relative Luminous Intensity  
Wavelength Characteristics




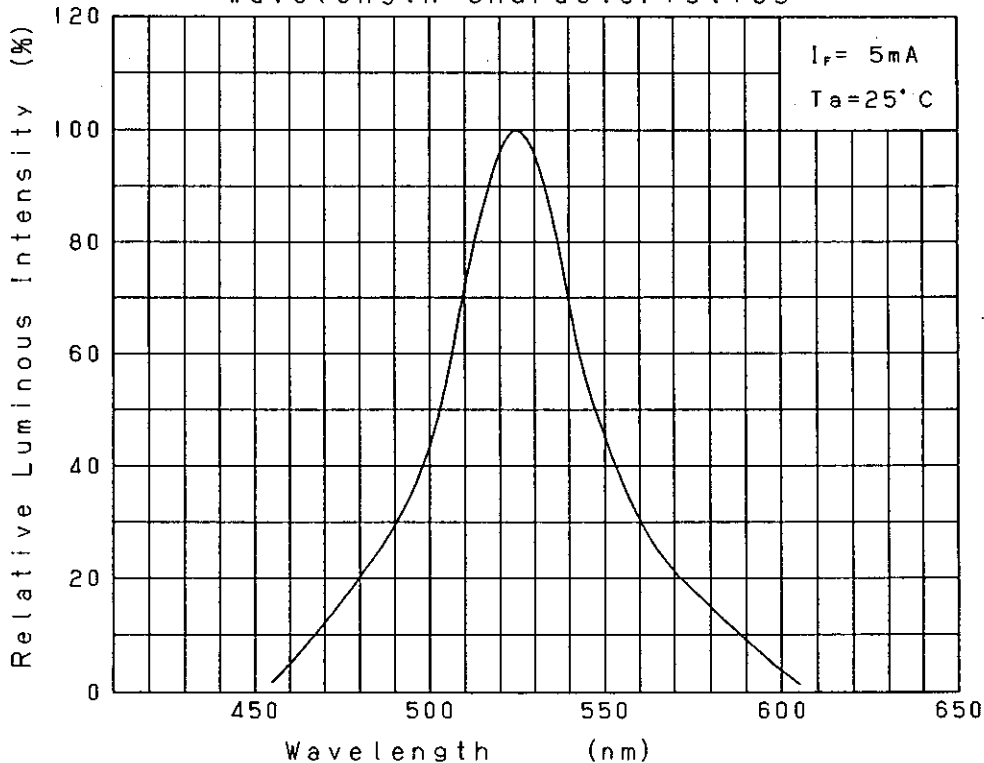



Directive Characteristics

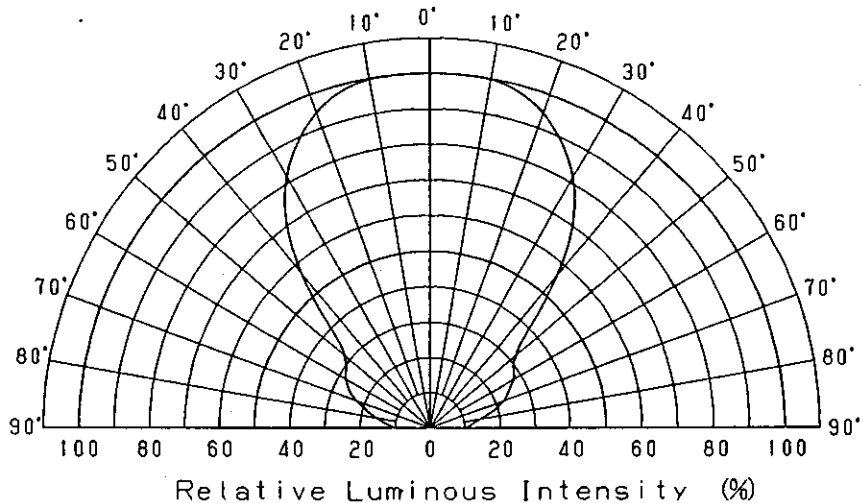

Nov. 7. 2001

Approved <i>T. Akeda</i>	Checked <i>M. Ni</i>	Designed <i>T. Taketa</i>	DEVELOPMENT SPECIFICATION (OUTLINE) P/N:		

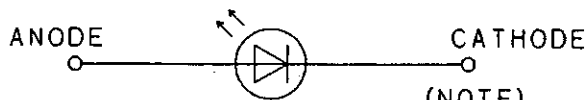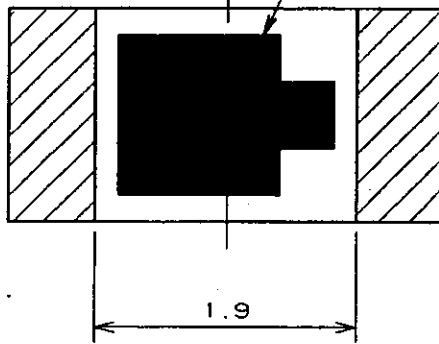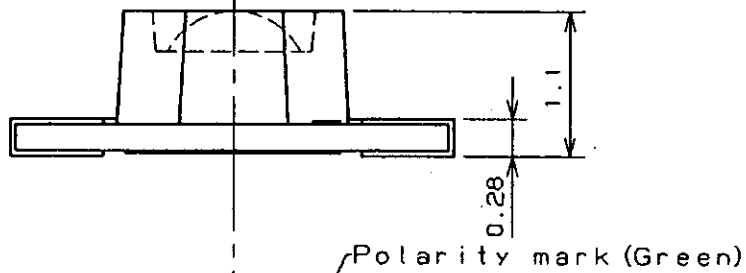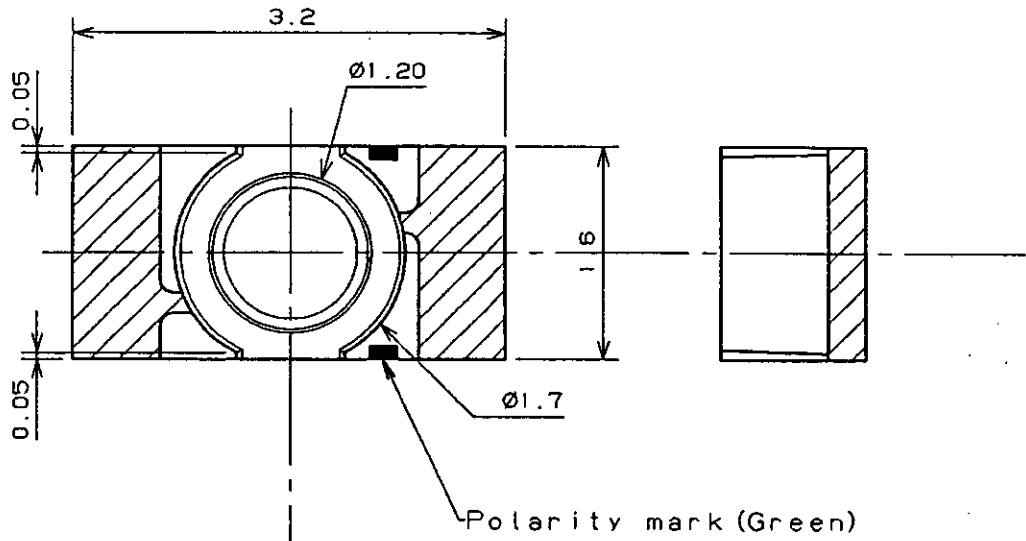

(NOTE)  
 1. Unit: mm  
 2. Tolerance unless specified is  $\pm 0.15$ .  
 3.  indicate Au terminal.

Jan. 31. 2000			