



# VTC338284 Series

## ISDN Modems with 2 Phone Ports

### Product Features

- High-speed network access for remote office and Internet connectivity using ISDN
- Asynchronous and synchronous (VTC338285 only) RS-232 interface
- Expert ISDN™ automatic SPID and switch detection
- Two analog POTS ports
- Place and receive phone calls while transmitting data
- Hifn LZS compression
- Supports custom calling features and Caller ID
- Remote configuration
- Easy configuration via AT commands or VT100 interface
- Flash upgradable
- Standard five-year warranty


The VTC338284 series is a family of ISDN modems that are ideal for remote access and corporate connectivity. The series is capable of transmitting data at speeds up to 230.4 Kbps, when using hi/fn compression or up to 512 Kbps when using Microsoft compression. They include both ISDN terminal adapter and network termination (NT1) functionality.

Configuring the VTC338284 series is fast and simple. Our patented Expert ISDN™ automatically detects the telephone company parameters such as Switch Type and SPID numbers. In areas where the telephone company automatically downloads this information to the modem, the units becomes plug-and-play with the ISDN line.

The VTC338284 series supports two analog devices such as telephone, fax machine, or analog modem in addition to the computer connection for data transmissions on the VTC338284. When transmitting data at maximum throughput over both B Channels using Multi-link PPP, the unit automatically

detects calls on analog port number 1. Upon detection, the data speed is adjusted to 64 Kbps using the B2 Channel and accepts the analog/voice call, on the B1 Channel. Upon completion of the analog/voice call, the data automatically resumes transfer over both B Channels.

Remote configuration allows MIS managers the flexibility of adjusting the configuration of remote units over the ISDN line. The VTC338284 transmits data over an RS-232 interface and transfers synchronous data at rates from 2400 bps to 128 Kbps (VTC338285 only) and asynchronous data at rates from 1200 bps to 230.4 Kbps. At rates over 64 Kbps, BONDing or MLPPP is used to synchronize the data across the two B Channels. Configuration of the unit is achieved using a VT100 interface or AT commands. Dialing is initiated in-band over the RS-232 interface using AT commands, V.25 bis or DTR assertion.

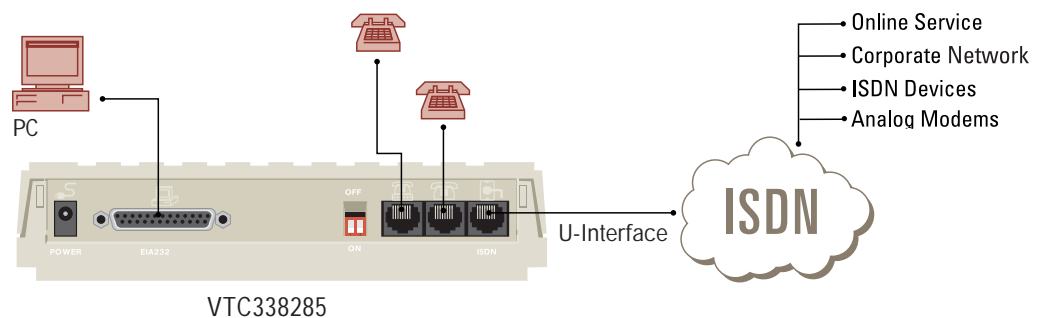

# VTC338284 Series

## ISDN Modems with 2 Phone Ports

### Product Specifications

#### Network Interface

- RJ-45 for ISDN Basic Rate U-interface (built-in NT1) 128 Kbps

#### DTE Interface

- EIA-232 (DB-25)
- Modem pass through port (3000 only)

#### DTE Data Rates

- 1.2 to 230.4 Kbps asynchronous
- 2400 to 128 Kbps synchronous (3010 only)

#### Compression

- Hifn LZS per PPP standard
- Compatible with Ascend® compression
- Compatible with Windows® 95/98 compression

#### Protocols

- Multi-link PPP
- ITU-T V.120
- Clear Channel
- Async BONDING
- Shiva PAP
- AODI/BACP (3000 only)

#### ISDN Switch Compatibility

- National ISDN-1
- Lucent 5ESS®
- Nortel DMS-100™

#### Dialing Selections

- AT commands
- DTR assertion
- V.25 bis (3010 only)

#### Diagnostics and Testing

- Network loopback
- Remote configuration

#### Analog Ports

- Two standard RJ-11 (REN = 3)
- Each port rings up to three phones within 500 ft

#### Custom Calling Features

- Stutter dial tone
- Three- and six-way conferencing
- Call forwarding
- Reminder ring
- Auto call back
- Distinctive ring
- Caller ID
- Implicit transfer
- Visual message waiting indication (Custom calling features must be provided by telephone company)

#### Agency approvals

- **Emissions:** FCC Part 15 Class B
- **Safety:** UL 1950, CUL
- **Telecom:** FCC Part 68, Industry Canada CS-03

#### Environment

- **Operating Temperature:** 0° to 50°C, (32° to 122°F)
- **Storage Temperature:** -20° to 70°C, (-4° to 158°F)
- **Relative Humidity:** Up to 95%, non-condensing

#### Physical

- **Dimensions:** 1.45" H, 4" D, 6.63" W
- **Weight:** 12.8 oz
- **Power:** 110 V, 8 W

#### Product Includes

- 110 V wallmount power supply
- CD ROM
- One cable to connect ISDN line

### Ordering Information

Equipment	Part #
VTC338284	VTC3555
VTC338285	VTC8615



VTC338284 rear panel



VTC338285 rear panel