

INPUT CHARACTERISTICS:**R2U-6300P**

- VOLTAGE: 90 ~ 264 VAC FULL RANGE
- FREQUENCY : 47 ~ 63 Hz
- INPUT CURRENT: 6.0 / 3.0 A FOR 115 / 230 VAC
- INRUSH CURRENT: 60A / 80A MAX. FOR 115 / 230 VAC PER POWER MODULE

OUTPUT CHARACTERISTICS:

OUTPUT VOLTAGE	OUTPUT CURRENT			REGULATION		OUTPUT
	MIN.[A]	MAX.[A]	PEAK(A)	LOAD	LINE	RIPPLE & NOISE MAX. [P-P]
5V	3.0	25		± 5%	± 1%	50mV
12V	2	16	20	± 7%	± 1%	100mV
-5V	0.05	0.5		±10%	± 1%	150mV
-12V	0.05	1.0		±10%	± 1%	150mV
3.3V	1.0	18		± 5%	± 1%	50mV
+5VSB	0.1	1.2		± 5%	± 1%	60mV



REMARKS: TOTAL CURRENT OF +5V AND + 3.3V NOT EXCEED 35 A

TOTAL +5V AND 3.3V AND 12V POWER NOT EXCEED 285 W

- TEMPERATURE RANGE : OPERATING 0°C --- 40°C, STORAGE -20°C --- 80°C
- HOLD UP TIME: 16 ms MINIMUM AT FULL LOAD & 90 VAC INPUT VOLTAGE
- DIELECTRIC WITHSTAND: INPUT / OUTPUT 1500 VAC FOR 1 MINUTE
INPUT TO FRAME GROUND 1500 VAC FOR 1 MINUTE
- EFFICIENCY: 63% TYPICAL, AT FULL LOAD
- POWER GOOD SIGNAL: ON DELAY 100 ms TO 500 ms, OFF DELAY 1 ms
- OVER LOAD PROTECTION: 110 ~ 160% MAX.
OVER VOLTAGE PROTECTION:
+5V → 5.7V ~ 6.5V, 3.3V → 3.9 ~ 4.3V, 12V → 13.3 ~ 14.3V
- EMI NOISE FILTER: FCC CLASS B, CISPR22 CLASS B
- SAFETY: UL 1950, CSA 22.2 NO/ 950, TÜV IEC 950
- REMOTE ON / OFF CONTROL
- FAULTY ALARM METHODS : LED, BUZZER, TTL SIGNAL
- HOT-SWAPPABLE / HOT-PLUGGABLE REDUNDANCY FUNCTION
- BALANCE LOAD SHARING DESIGN
- REMOTE SENSING DESIGN
- ISOLATION: BUILT-IN IN THE POWER MODULE
- MEET IEC-1000-3-2 CLASS D (ACTIVE PFC)
- DIMENSION: 86(H) X 150(W) X 220 (D) mm
- COOLING : TWO 60 mm DC FANS

Revision: A02

修訂 REVISIONS		日期 DATE
版次 REV.	記號 DESCRIPTION	

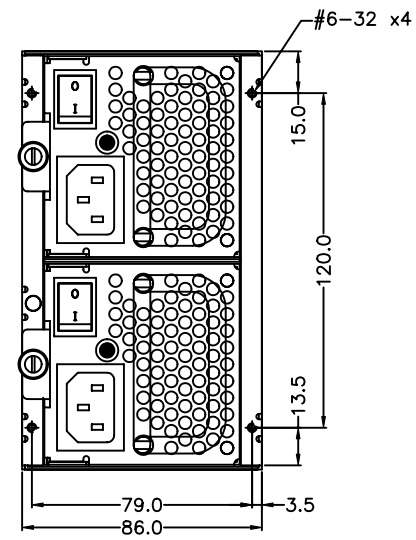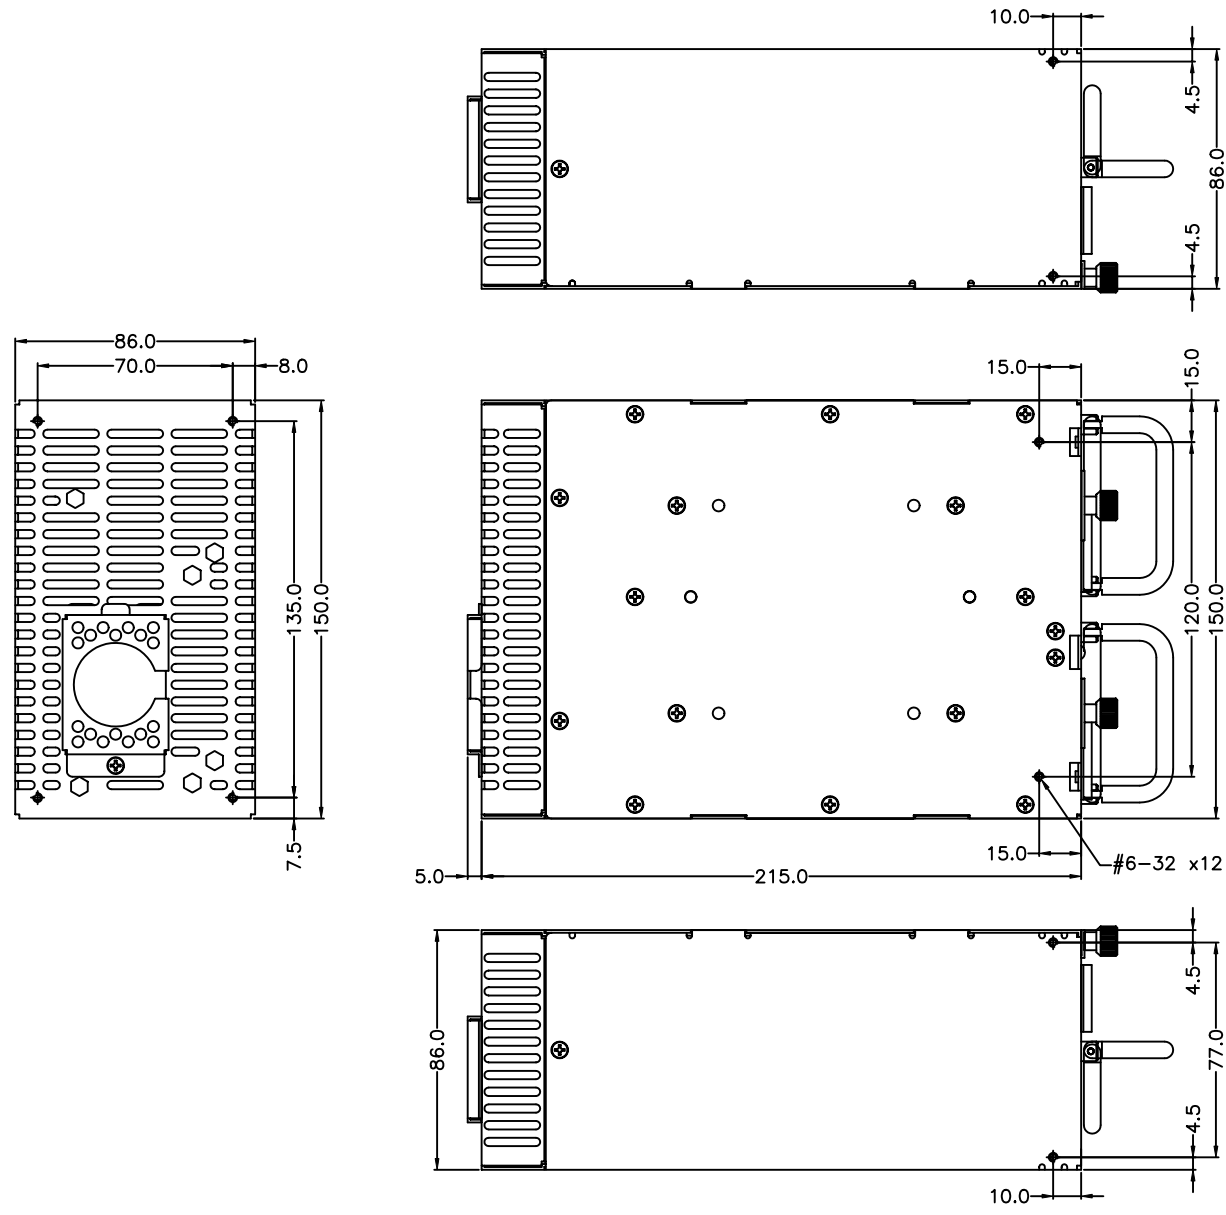


NOTE: W/O BRACKET

容許公差: TOLERANCES:	.XXX ±.025 .XX ±.100 .X ±.250
----------------------	-------------------------------------

材料規格: MATERIAL:	
核准者: APPROVE BY:	日期: DATE:
審核者: CHECK BY:	日期: DATE:
繪圖者: DRAW BY:	日期: DATE:

投影法:
PROJECTION:
第三角法

 新巨企業股份有限公司 ZIPPY TECHNOLOGY CORP. POWER DIVISION	
品名: MODEL NO:	R2U 外觀尺寸圖 (1)
料號: PART NO:	
圖號: DRAW NO:	R2U0MA00
槽號: FILE NO:	R2U0MA00
單位: UNITS:	mm
版次: REV. NO:	A1
規格: SPEC:	A1
編號: SHEET:	OF