

IPC-6606

6-slot IPC Chassis




Features

- Cost-effective wallmount/desktop IPC chassis
- Equipped with a 6-slot ISA or ISA/PCI backplane to hold six full-length cards
- One front access half-height disk drive and one 3.5" FDD, plus one internal 3.5" HDD
- One 49 CFM cooling fan with air filter
- With 250 W ATX power supply

Specifications

- **Disk drive bay:** Vibration damped. One front-access half-height disk drive and one 3.5" FDD, plus one internal 3.5" HDD
- **Cooling fan:** One 49 CFM cooling fan with air filter
- **Controls:** Front panel reset switch, rear panel power switch
- **Indicators:** LEDs for power On/Off and HDD activity
- **Dimensions (W x H x D):** 173 x 254 x 396 mm (6.8" x 10" x 15.6")
- **Weight:** 6.2 kg (13.7 lb)
- **Paint color:** PANTONE 414U
- **Operation temperature:** 0 ~ 50° C (32 ~ 122° F)
- **Relative humidity:** 10 ~ 95% @ 40° C, non-condensing
- CE compliant

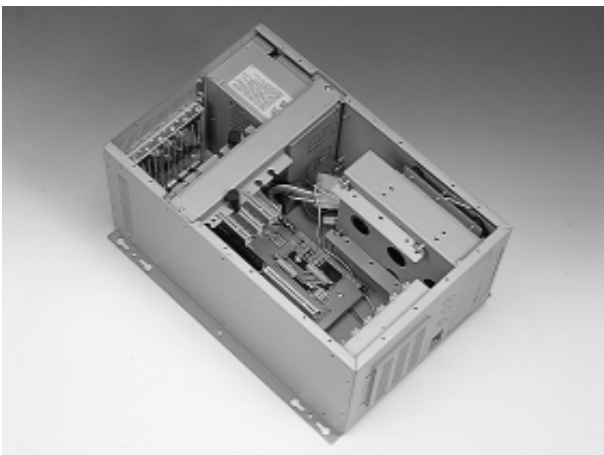

Power Supply Specifications

Model Name	Specification				
	Watt	Input	Output	Mini-load	MTBF
PS-250X-DPS (ATX)	250 W	110/220 V _{AC}	+5 V @ 25 A +3.3 V @ 14 A +12 V @ 8 A -5 V @ 0.5 A -12 V @ 0.8 A +5Vsb @ 1 A	+5 V @ 1.5 A +12 V @ 0.2 A	100,000 hours

UL/CUL/FCC/TÜV/CE approved

Passive Backplane Options

B/P Model Name	Slots per Segment (ISA/PCI/CPU)	Segment
PCA-6106	6 ISA	Single
PCA-6106P3-B	2 / 3 / 1	Single


Ordering Information

- ☐ **IPC-6606-25X**
With 6 ISA-slot backplane and PS-250X-DPS power supply
- ☐ **IPC-6606P3-25X**
With 2 ISA / 3 PCI / 1 CPU-slot backplane and PS-250-DPS power supply



Dimensions

Unit: mm (inch)

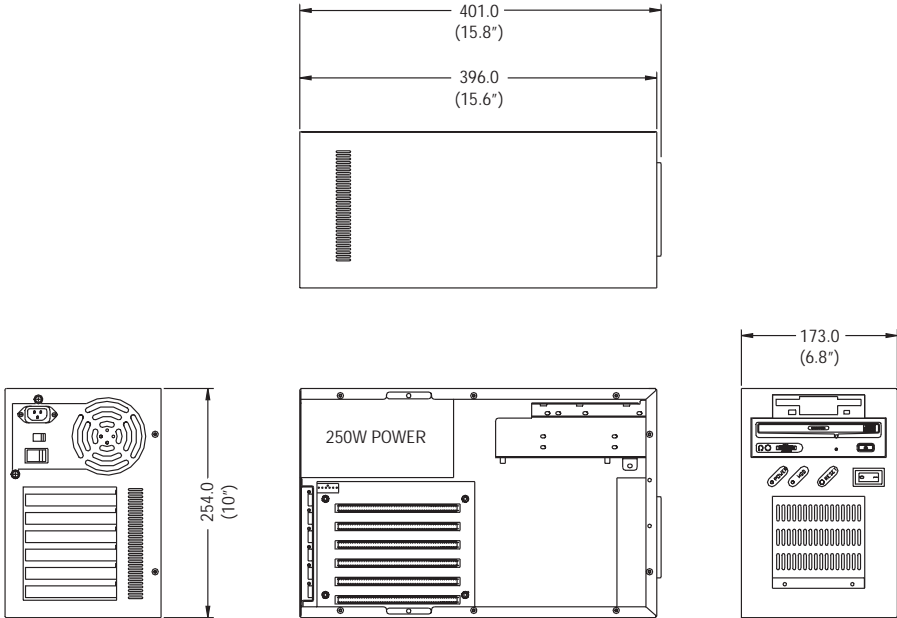

Installations

Unit: mm (inch)

Bidirectional mounting

