

84 PIN PLCC SOCKET ADAPTER

Model : PA84PL40DD-YA

These adapters connect the pins of a 84 pin PLCC device to a 40 pin DIP equivalent.
They accept a PLCC device and plug into a DIP socket.


Order No.

► PA84PL40DD-YA

Socket manufacture (Yamaichi), Socket type (Auto eject)

The PA84PL40DD-YA socket adapter accepts with the device family below :

HITACHI H8/532
HITACHI H8/536

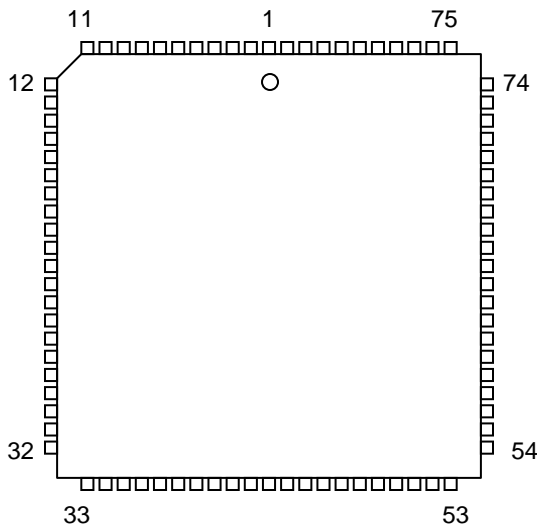

The following chart shows the connections from the PLCC socket to the adapter's DIP plug.

PLCC84	DIP40	DIP40	PLCC84
-	1	40	* Note 4
-	2	39	-
-	3	38	-
-	4	37	-
21	5	36	* Note 3
8	6	35	9
7	7	34	-
47	8	33	49
40	9	32	48
39	10	31	43
38	11	30	-
37	12	29	46
36	13	28	* Note 2
35	14	27	45
34	15	26	50
33	16	25	32
25	17	24	31
26	18	23	30
27	19	22	29
* Note 1	20	21	28

* Note 1

PLCC – 2, 17, 18, 19, 20, 24, 41, 42, 64, 65, 83

C1 – 2

* Note 2

PLCC – 22, 44

* Note 3

PLCC – 16, 51, 55, 74

C1 – 1, R1 – 2

* Note 4

PLCC – 52, R1 – 1