

Description: piezo electric diaphragm

Date: 6/25/2007 Unit: mm Page No: 1 of 4




Specifications

30 Vp-p		
4.5 ± 0.5 KHz	see Measurement Methods	
500 Ω max.	see Measurement Methods	
16,000 ±30% pF	at 1 KHz / 1 V	
-20 ~ +70° C		
-30 ~ +80 ° C		
ø27.0 x H0.51 mm		
2.0 g max.		
Brass		
Wire type		
yes		
	4.5 ± 0.5 KHz 500 Ω max. 16,000 ±30% pF -20 ~ +70° C -30 ~ +80° C ø27.0 x H0.51 mm 2.0 g max. Brass Wire type	4.5 ± 0.5 KHz see Measurement Methods 500 Ω max. see Measurement Methods 16,000 ±30% pF at 1 KHz / 1 V -20 ~ +70° C -30 ~ +80° C 0 27.0 x H0.51 mm 2.0 g max. Brass Wire type

Appearance Drawing

Tolerance: ±0.5

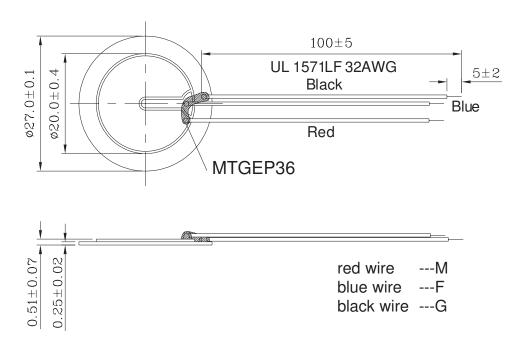



Date: 6/25/2007 Unit: mm Page No: 2 of 4


Description: piezo electric diaphragm

Measuring Methods

1) Resonant frequency / Resonant impedance

The piezo electric diaphragm should be clamped at a node point (as shown in the following figure) to be free from any mechanical stress. Measure its resonant frequency and resonant impedance by using a vector impedance analyzer or equivalent.

When the input frequency is swept within 100 Hz to 5 KHz, the resonant frequency is defined as the frequency where the impedance shows minimum value. This impedance should be the resonant impedance.



2) Static capacitance

The electrostatic capacitance should be measured at 120 Hz by using an L.C.R. meter (ex. HP4194A(H.P.)) or equivalent. The part should be clamped in the same way as the measurement or resonant frequency / resonant impedance mentioned above.

Mechanical Characteristics

Item	Test Condition	Evaluation Standard
Solderability	Stripped wires of lead wires are immersed in	90% min. of the stripped wires
-	rosin for 5 seconds and then immersed in	will be wet with solder.
	solder bath of 270 \pm 5°C for 3 \pm 0.5 seconds.	(Except the edge of the terminal)
Lead Wire Pull Strength	The horizontal force of 3.0N (0.306kg) should be applied to the double lead wire for 30 sec.	No damage or cutting off.
Vibration	The diaphragm should be measured after applying a vibration amplitude of 1.5 mm with 10 to 55 Hz band of vibration frequency to each of the 3 perpendicular directions for 2 hours.	The value of the resonant frequency should be $\pm 10\%$ of the initial measurements. Electrostatic capacitance should be $\pm 20\%$ compared with the initial measurement. The resonant impedance should be 2000Ω max.



Description: piezo electric diaphragm

Date: 6/25/2007 Unit: mm Page No: 3 of 4

Environment Test

Item	Test Condition	Evaluation Standard
High temp. test	After being placed in a chamber at +80°C for 240 hours.	
Low temp. test	After being placed in a chamber at -30°C for 240 hours.	
Humidity test	After being placed in a chamber at +40°C and 90±5% relative humidity for 240 hours.	The diaphragm will be measured
Temp. cycle test	The part shall be subjected to 5 cycles. One cycle will consist of:	after being placed at +25°C for 4 hours. The value of the resonant frequency should be $\pm 10\%$, the value of the electro static capacitance should be $\pm 20\%$ compared to the initial measurements. The resonant impedance should be 2,000 Ω max.

Test Conditions

Standard Test Condition Judgement Test Condition a) Tempurature: +5 ~ +35°C a) Tempurature: +25 ±2°C b) Humidity: 45 - 85% b) Humidity: 60 - 70%

c) Pressure: 860-1060 mbar c) Pressure: 860-1060 mbar



Description: piezo electric diaphragm

Date: 6/25/2007 Unit: mm Page No: 4 of 4

Packaging

