

FBM242, Externally Sourced, Discrete Output Interface Module



The FBM242 Discrete Output Interface Module contains 16 discrete output channels which are sourced externally.

FEATURES

Key features of the FBM242 modules are:

- ▶ Sixteen discrete outputs
- ▶ Supports discrete output signals at voltages of:
 - 15 to 60 V dc
 - 120 V ac/125 V dc
 - 240 V ac
- ▶ Each input and output is galvanically isolated; group isolated when used with external excitation
- ▶ Compact, rugged design suitable for enclosure in Class G3 (harsh) environments
- ▶ Executes the Discrete I/O or Ladder Logic program, with the following configurable options: Input Filter Time, Fail Safe Configuration, Fail-Safe Fall-Back, and Sustained or Momentary Outputs
- ▶ Various Termination Assemblies (TAs) that contain:
 - Current limiting devices
 - Fuses
 - Relay outputs with external power source, fusing, and power distribution
 - Solid state outputs
 - Redundant power distribution

OVERVIEW

The FBM242 Discrete Output Interface Module contains 16 discrete output channels, which are sourced externally, rated up to 2 A at 60 V dc. Associated termination assemblies (TAs) provide for discrete outputs to loads of 2 A at 60 V dc, relay outputs (120 V ac/125 V dc, or 240 V ac), or relay outputs with power distribution and fusing. Each output is fully isolated from other channels and ground.

The module interfaces electrical output signals from a control processor to the field devices. It executes a digital I/O application program, with ladder logic support, and provides a Fail-Safe Configuration option for the outputs.

COMPACT DESIGN

The module has a compact design, with a rugged extruded aluminum exterior for physical protection of the circuits. Enclosures specially designed for mounting the FBMs provide various levels of environmental protection, up to harsh environments (Class G3), per ISA Standard S71.04.

VISUAL INDICATORS

Light-emitting diodes (LEDs) incorporated into the front of the module provide visual indication of the module operational status, as well as the discrete states of the individual output points.

EASY REMOVAL/REPLACEMENT

The module can be removed/replaced without removing field device termination cabling, power, or communication cabling.

FIELDBUS COMMUNICATION

A Fieldbus Communications Module or a Control Processor interfaces to the redundant 2 Mbps module Fieldbus used by the FBMs. The FBM242 accepts communication from either path (A or B) of the redundant 2 Mbps Fieldbus — should one path fail or be switched at the system level, the module continues communication over the active path.

SECURITY

Field power for contacts or solid state switches is current limited.

MODULAR BASEPLATE MOUNTING

The module mounts on a DIN rail mounted Modular baseplate, which accommodates up to four or eight Fieldbus Modules. The Modular baseplate is either DIN rail mounted or rack mounted, and includes signal connectors for redundant Fieldbus, redundant independent dc power, and termination cables.

TERMINATION ASSEMBLIES (TAs)

Field I/O signals connect to the FBM subsystem via DIN rail mounted TAs. The TAs used with the FBM242 are described in “TERMINATION ASSEMBLIES” on page 8.

FUNCTIONAL SPECIFICATIONS

Output Channels

Sixteen isolated channels.

Applied Voltage

15 to 60 V dc (maximum)

Load Current

2.25 A (maximum) per channel

Load Current-In-Rush

8 A (maximum) for 20 ms per channel at 30°C.
6.4 A (maximum) for 20 ms per channel at 70°C.

On-State Voltage Drop

0.2 V (maximum) at 2.25 A

Off-State Leakage Current

0.1 mA (maximum)

Inductive Loads

Module output may require a protective diode or metal oxide varistor (MOV) connected across the inductive load.

Output Channel Isolation

Each channel is galvanically isolated from all other channels and earth (ground). The module withstands, without damage, a potential of 600 V ac applied for one minute between any channel and ground, or between a given channel and any other channel.

CAUTION

This does not imply that these channels are intended for permanent connection to voltages of these levels. Exceeding the limits for input voltages, as stated elsewhere in this specification, violates electrical safety codes and may expose users to electric shock.

Communication

Communicates with its associated FCM or FCP via the redundant 2 Mbps module Fieldbus

Power Requirements

INPUT VOLTAGE RANGE (REDUNDANT)

24 V dc +5%, -10%

CONSUMPTION (MAXIMUM)

3 W (maximum) at 24 V dc

HEAT DISSIPATION (MAXIMUM)

6.5 W (maximum) at 24 V dc (with all outputs at 1.5 A each)

Calibration Requirements

The module and termination assemblies require no calibration.

FUNCTIONAL SPECIFICATIONS (CONTINUED)

Regulatory Compliance

ELECTROMAGNETIC COMPATIBILITY (EMC)

European EMC Directive 89/336/EEC

Meets: EN 50081-2 Emission standard

EN 50082-2 Immunity standard

EN 61326 Annex A (Industrial Levels)

CISPR 11, Industrial Scientific and Medical (ISM) Radio-frequency Equipment -

Electromagnetic Disturbance Characteristics - Limits and Methods of Measurement

Meets: Class A Limits

IEC 61000-4-2 ESD Immunity

Contact 4 kV, air 8 kV

IEC 61000-4-3 Radiated Field Immunity

10 V/m at 80 to 1000 MHz

IEC 61000-4-4 Electrical Fast

Transient/Burst Immunity

2 kV on I/O, V dc power and communication lines

IEC 61000-4-5 Surge Immunity

2kV on ac and dc power lines; 1kV on I/O and communications lines

IEC 61000-4-6 Immunity to Conducted Disturbances induced by Radio-frequency Fields

10 V (rms) at 150 kHz to 80 MHz on I/O, V dc power and communication lines

IEC 61000-4-8 Power Frequency Magnetic Field Immunity

30 A/m at 50 and 60 Hz

PRODUCT SAFETY - TERMINATION

ASSEMBLIES WITH LOW VOLTAGE INPUTS

Underwriters Laboratories (UL) for U.S. and Canada

UL/UL-C listed as suitable for use in

UL/UL-C listed Class I, Groups A-D;

Division 2; temperature code T4 enclosure

based systems. These modules are also UL

and UL-C listed as associated apparatus for

supplying non-incendive communication

circuits for Class I, Groups A-D hazardous

locations when connected to specified

I/A Series® processor modules as described

in the *I/A Series DIN Rail Mounted*

Subsystem User's Guide (B0400FA).

Communications circuits also meet the

requirements for Class 2 as defined in Article

725 of the National Electrical Code (NFPA

No.70) and Section 16 of the Canadian

Electrical Code (CSA C22.1). Conditions for

use are as specified in the *I/A Series DIN Rail*

Mounted Subsystem User's Guide

(B0400FA).

European Low Voltage Directive 73/23/EEC

and Explosive Atmospheres (ATEX) directive

94/9/EC

CENELEC (DEMKO) certified as

EEx nA IIC T4 for use in CENELEC certified

Zone 2 enclosure certified as associated

apparatus for supplying non-incendive field

circuits for Zone 2, Group IIC, potentially

explosive atmospheres when connected to

specified I/A Series processor modules as

described in the *I/A Series DIN Rail Mounted*

Subsystem User's Guide (B0400FA). Also

see, "Certifications for Termination

Assemblies" on page 11.

PRODUCT SAFETY - TERMINATION

ASSEMBLIES WITH RELAY OUTPUTS OR HIGH VOLTAGE INPUTS

Underwriters Laboratories (UL) for U.S. and Canada

UL/UL-C listed as suitable for use in ordinary

locations and compliant with UL 3121, First

Edition, and Canadian Standard, C22.2

No.1010.1-92 when connected to specified

I/A Series processor modules as described

in the *I/A Series DIN Rail Mounted*

Subsystem User's Guide (B0400FA).

European Low Voltage Directive 73/23/EEC

Certified for use in ordinary locations and

compliant with IEC 61010 when connected

to specified I/A Series processor modules as

described in the *I/A Series DIN Rail Mounted*

Subsystem User's Guide (B0400FA)

ENVIRONMENTAL SPECIFICATIONS⁽¹⁾

Operating Conditions

TEMPERATURE

Module

-20 to +70°C (-4 to +158°F)

Termination Assembly

PVC

-20 to +50°C (-4 to +122°F)

PA

-20 to +70°C (-4 to +158°F)

RELATIVE HUMIDITY

5 to 95% (noncondensing)

ALTITUDE

-300 to +3000 m (-1000 to +10 000 ft)

Storage Conditions

TEMPERATURE

-40 to +70°C (-40 to +158°F)

RELATIVE HUMIDITY

5 to 95% (noncondensing)

ALTITUDE

-300 to +12 000 m (-1000 to +40 000 ft)

Contamination

Suitable for use in Class G3 (Harsh) environments as defined in ISA Standard S71.04, based on exposure testing according to EIA Standard 364-65, Class III.

Vibration

7.5 m/s² (5 to 500 Hz)

(1) The environment ranges can be extended by the type of enclosure containing the module. Refer to the Product Specification Sheet (PSS) applicable to the enclosure that is to be used.

PHYSICAL SPECIFICATIONS

Mounting

MODULE

FBM242 mounts on a Modular Baseplate. The baseplate can be mounted on a DIN rail (horizontally or vertically), or horizontally on a 19-inch rack using a mounting kit. Refer to PSS 21H-2W6 B4 for details.

TERMINATION ASSEMBLY

The TA mounts on a DIN rail and accommodates multiple DIN rail styles including 32 mm (1.26 in) and 35 mm 1.38 in)

Mass

MODULE

284 g (10 oz) approximate

TERMINATION ASSEMBLY

Compression

127 mm (5.02 in) – 272 g (0.60 lb, approximate)

148 mm (5.75 in) – 285 g (0.65 lb, approximate)

216 mm (8.51 in) – 320 g (0.70 lb, approximate)

Ring Lug

196 mm (7.78 in) – 310 g (0.68 lb, approximate)

321mm (12.64 in) – 600 g (1.6 lb, approximate)

Part Numbers

MODULE

P0916TA

TERMINATION ASSEMBLIES

Refer to “FUNCTIONAL SPECIFICATIONS - TERMINATION ASSEMBLIES” on page 9

Dimensions - Module

HEIGHT

102 mm (4 in), 114 mm (4.5 in) including mounting lugs

WIDTH

45 mm (1.75 in)

DEPTH

104 mm (4.11 in)

Dimensions - Termination Assembly

COMPRESSION SCREW

Refer to page 13

RING LUG AND KNIFE SWITCH

Refer to page 15

Termination Cables

CABLE LENGTHS

Up to 30 m (98 ft)

CABLE MATERIALS

Polyurethane or Hypalon®/XLP.

TERMINATION CABLE TYPE

Type 4 or type 4H - Refer to Table 1

CABLE CONNECTION

37-pin male D-subminiature

Construction - Termination Assembly

MATERIAL

Polypropylene (PVC), compression

Polyamide (PA), compression

PVC, ring lug

PVC, knife terminal

FAMILY GROUP COLOR

Dark blue - discrete

TERMINAL BLOCKS

Outputs- 2 tiers (switch and solid state), 3 tiers (relay), 16 positions

Power Distribution - 2 tiers, 4 positions

PHYSICAL SPECIFICATIONS (CONTINUED)**Field Termination Connections****COMPRESSION - ACCEPTED WIRING SIZES***Solid/Stranded/AWG*0.2 to 4 mm²/0.2 to 2.5 mm²/24 to 12 AWG*Stranded with Ferrules*0.2 to 2.5 mm² with or without plastic collar**RING-LUG - ACCEPTED WIRING SIZES**

#6 size connectors (0.375 in (9.5 mm))

0.5 to 4 mm²/22 AWG to 12 AWG**Termination Assembly Switching Relays****ELECTRICAL SERVICE LIFE**

100,000 operations at rated resistive load

5,000,000 operations at no load.

5 A RELAY*Type*

Single-Pole, Double-Throw, Normally Open (SPDT_NO)

Switching Current

5 A at up to 120 V ac (see "GENERAL PURPOSE PLUG-IN RELAY TERMINATION ASSEMBLY SPECIFICATIONS" on page 16)

TERMINATION ASSEMBLIES

General Description

Field I/O signals connect to the FBM subsystem via DIN rail mounted termination assemblies (TAs). Multiple types of TAs are available with FBMs to provide I/O signal connections, signal conditioning, optical isolation from signal surges, external power connections, and/or fusing for protection of the FBM and/or field device as required by the particular FBM. Since these features are built into the termination assemblies (where required), in most applications there is no need for additional termination equipment for field circuit functions such as circuit protection or signal conditioning (including fusing and power distribution).

The DIN rail mounted termination assemblies connect to the FBM subsystem baseplate by means of removable termination cables. The cables are available in a variety of lengths, up to 30 meters (98 feet), allowing the termination assemblies to be mounted in either the enclosure or in an adjacent enclosure. Refer to "FUNCTIONAL SPECIFICATIONS - TERMINATION ASSEMBLIES" on page 9 for termination cable part numbers and specifications.

Discrete Outputs

Termination assemblies with discrete outputs support sixteen 2-wire discrete output signals at passive low voltages of less than 60 V dc and active high voltage levels of 120 V ac or 240 V ac. Active termination assemblies support output signal conditioning for FBMs. To condition signals, these termination assemblies provide fuse protection, relays, solid-state devices, and terminal blocks to connect externally supplied optional power distribution.

Low Voltage Discrete Outputs

The low voltage outputs (less than 60 V dc) use passive termination assemblies. These assemblies are available with and without output protection

(fusing). Termination assemblies with protection have individual user serviceable fuses that are designed to limit the output current to 2 A. Sixteen vertically mounted, one per channel, 3.15 A sand filled fuses (temperature derated) allow a maximum of 2 A current per output channel. Termination assemblies without fusing (unprotected) are intended for use by Foxboro engineers or customers who are using interposing relays or fuse terminal blocks between the termination assembly and the field devices.

Power for the low voltage outputs can be supplied by the FBM +24 V dc auxiliary power supply (internally (FBM) sourced) or by a field voltage source (externally sourced).

High Voltage Discrete Outputs

The high voltage output (120 V ac or 240 V ac) termination assemblies use plug-in SPDT (Form C) electromechanical relays and solid-state switches. The plug-in sockets allow field replacement of individual relays. The relays and associated sockets are located under the component covers of the termination assemblies. The termination assembly's switched outputs use unsealed, general purpose relays. These assemblies are capable of providing mixed voltage and are designed to provide signal segregation by locating the low voltage inputs on the opposite side of the terminal assembly from the outputs. A solid-state output module is optionally available. High voltage discrete outputs are always externally sourced power.

The output termination assemblies come in either output or output with power distribution (user-supplied via terminals on the termination assembly). In both configurations, when the FBM output is on, the relay coil is energized and the relay contact is switched from normally closed (NC) position to the normally open (NO) position. The FBM +24 V dc auxiliary power supply is used to energize the relay coil.

Termination assemblies with power distribution have a dedicated terminal block which provides a connection to externally supplied power and distributed internally on the termination assembly to each of the output channels. The line or positive side of the supply is fused; the neutral or negative side of the supply is connected to the field.

FUNCTIONAL SPECIFICATIONS - TERMINATION ASSEMBLIES

FBM Type	Output Signal ^(a)	TA Part Number ^(b)		Term. Type ^(c)	TA Cable Type ^(d)	TA Certification Type ^(e)
		PVC	PA			
FBM242	16 channel, switch (protected - fused) 15 to 60 V dc (externally sourced) at 2 A maximum Channel isolation provided by FBM242	P0916JY P0916RJ		C RL	4, 4H	1,2
FBM242	16 channel, switch (unprotected - no fuses) 15 to 60 V dc (externally sourced) at 2 A maximum Channel isolation provided by FBM242	P0917XX		C	4, 4H	1,2
FBM242	16 channel, switch (protected - fused) 15 to 60 V dc (externally sourced) at 2 A maximum with power distribution Current is limited to 12A maximum for each group of 8 channels simultaneously Group isolation provided by termination assembly	P0917HX		C	4, 4H	1,4
FBM242	16 channel, switch (each channel is protected - fused) Redundant power 15 to 60 V dc (externally sourced) at 12 A maximum with power distribution Group isolation provided by termination assembly	P0923LH ^(f)		C	4, 4H	1,4
FBM242	16 channel, switch (externally sourced) SPDT (Form C) Relays with LED indicators <30 V dc at 5 A maximum, Up to 250 V ac at 5 A maximum Channel isolation provided by termination assembly relays	P0923LL		C	4	5

FUNCTIONAL SPECIFICATIONS - TERMINATION ASSEMBLIES (CONTINUED)

FBM Type	Output Signal ^(a)	TA Part Number ^(b)		Term. Type ^(c)	TA Cable Type ^(d)	TA Certification Type ^(e)
		PVC	PA			
FBM242	16 channel, switch (externally sourced) SPDT (Form C) Relays <30 V dc at 5 A maximum, Up to 250 V ac at 5 A maximum Channel Isolation provided by termination assembly relays	P0916NG P0916RK	P0916YY	C RL	4	5
FBM242	16 channel, switch (externally sourced) with power distribution SPDT (Form C) Relays <30 V dc at 5 A maximum Up to 250 V ac at 5 A maximum Total current is limited to 12 A maximum for each group of 8 channels simultaneously Group isolation provided by termination assembly	P0916JZ P0916RL	P0916YZ	C RL	4	5
FBM242	16 channel, switch (externally sourced) SPDT (Form C) Relays 125 V ac/125V dc at 2 A maximum Channel isolation provided by termination assembly relays	P0926DV		Knife ^(g)	4	5
FBM242	16 channel, switch (externally sourced) Solid State Switch 125 V ac/125V dc at 2 A maximum Channel isolation provided by FBM242	P0926BE		Knife ^(g)	4	5

(a) Maximum current is limited to 12 A per 8 channels. Output inductive load limits based on current of 2 A. Inductance limit increases by a factor of 4, for each factor of 2 reduction in current. For an inductive load above stated limits, a snubber diode is required for a dc inductive load or a MOV (metal oxide varistor) is required for an ac inductive load. Diode current rating must be equal to the maximum load current and voltage rating equal to 1.3X maximum supply voltage. MOV must be rated for 120 V ac use and current rating must be equal to maximum load current.

(b) PVC is polyvinyl chloride rated from -20 to +50°C (-4 to 122°F); PA is polyamide rated from -20 to +70°C (-4 to +158°F).

(c) C = TA with compression terminals, RL = TA with ring lug terminals. Knife has compression terminals.

(d) See to Table 2 and Table 3 for cable part numbers.

(e) See to Table 1 Termination Assembly certification definitions.

(f) The "ON" volt drop for an FBM242 across the Oring diode is typically: 0.498V @ 12A; 0.520V @16 A. The typical voltage drop to a channel output is 0.6V at 1.65A per channel.

(g) This is knife disconnect construction. Knives and test sockets provided for circuit validation only. Knife disconnects are not rated for interrupting loads. Power must be removed before disconnecting circuit.

Table 1. Certifications for Termination Assemblies

Type	Certification
Type 1	TAs are UL/UL-C listed as suitable for use in Class I; Groups A-D; Division 2 temperature code T4 hazardous locations. They are CENELEC (DEMKO) certified EEx nA IIC T4 for use in Zone 2 potentially explosive atmospheres.
Type 2	TAs are UL/UL-C listed as associated apparatus for supplying non-incendive field circuits Class I; Groups A-D; Division 2 hazardous locations when connected to specified DIN rail mounted FBMs and field circuits meeting entity parameter constraints specified in <i>DIN Rail Mounted Subsystem User's Guide</i> (B0400FA). They are also CENELEC (DEMKO) certified as associated apparatus for supplying field circuits for Group IIC, Zone 2 potentially explosive atmospheres. Field circuits are also Class 2 limited energy (60 V dc, 30 V ac, 100 VA or less) if customer-supplied equipment meets Class 2
Type 4	All field circuits are Class 2 limited energy (60 V dc, 30 V ac, 100 VA or less) if customer-supplied equipment meets Class 2 limits.
Type 5	The TA and its field circuitry are for use in only ordinary (non-hazardous) locations.

Table 2. P/PVC Cable Types and Part Numbers

Length m (ft)	Type 4, 26 AWG ^(b)	Type 4H, 22 AWG ^{(a)(b)}	Length m (ft)	Type 4, 26 AWG ^(b)	Type 4H, 22 AWG ^{(a)(b)}
0.5 (1.6)	P0916FG		10.0 (32.8)	P0916FL	P0916GE
1.0 (3.2)	P0916FH		15.0 (49.2)	P0916FM	P0916GF
2.0 (6.6)	P0931RQ		20.0 (65.6)	P0916FN	P0916GG
3.0 (9.8)	P0916FJ		25.0 (82.0)	P0916FP	P0916GH
5.0 (16.4)	P0916FK		30.0 (98.4)	P0916FQ	P0916GJ

(a) Type 4H cables are used to reduce voltage drop in long (greater than 5 m (15 ft)) cable run applications.

(b) Type 4 and Type 4H cables are not interchangeable.

P/PVC is polyurethane outer jacket and semi-rigid PVC primary conductor insulation. Temperature range; -20 to +80°C (-4 to +176°F)

Table 3. Hypalon/XLPE Cable Types and Part Numbers

Length m (ft)	Type 4, 26 AWG ^(b)	Type 4H, 22 AWG ^{(a)(b)}	Length m (ft)	Type 4, 26 AWG ^(b)	Type 4H, 22 AWG ^{(a)(b)}
0.5 (1.6)	P0916WD		10.0 (32.8)	P0916WH	P0916WN
1.0 (3.2)	P0916WE		15.0 (49.2)	P0916WJ	P0916WP
2.0 (6.6)	P0931RU		20.0 (65.6)	P0916WK	P0916WQ
3.0 (9.8)	P0916WF		25.0 (82.0)	P0916WL	P0916WR
5.0 (16.4)	P0916WG		30.0 (98.4)	P0916WM	P0916WS

(a) Type 4H cables are used to reduce voltage drop in long (greater than 5 m (15 ft)) cable run applications.

(b) Type 4 and Type 4H cables are not interchangeable.


H/XLPE is Hypalon outer jacket and XLPE (cross-linked polyethylene) primary conductor insulation. Temperature range; -40 to +90°C (-40 to +194°F).

DIMENSIONS – NOMINAL


[mm]
in

Compression Termination Assemblies


P0917XX, P0916JY

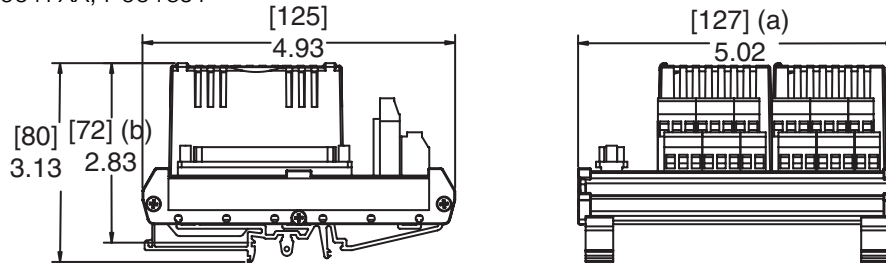


P0917HX

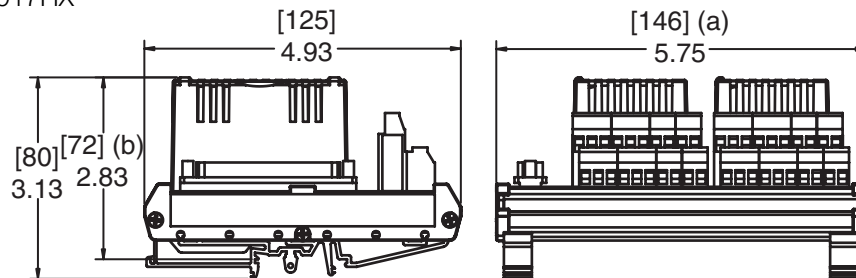

P0916JZ, P0916YZ

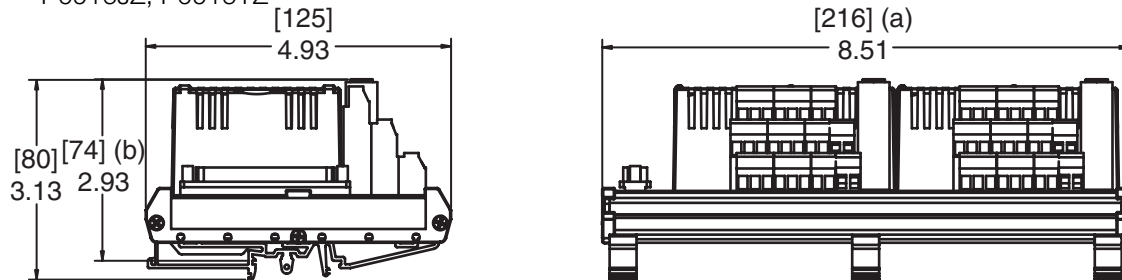

P0916NG, P0916YY, P0923LL1

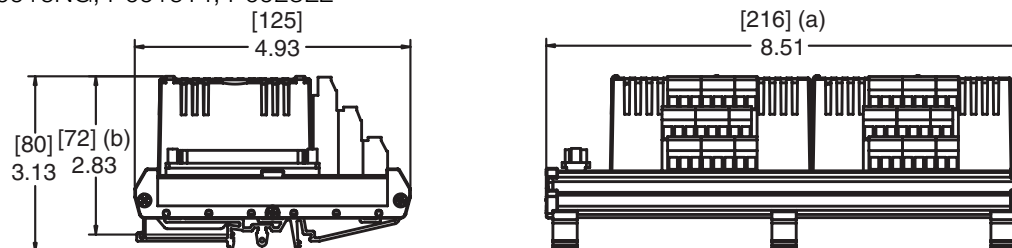

- (a) Overall width – for determining DIN rail loading.
- (b) Height above DIN rail (add to DIN rail height for total).


¹Dimensions shown are for the PVC versions. All dimensions for this polyamide termination assembly are smaller.

DIMENSIONS – NOMINAL (CONTINUED)

[mm]
in


Compression Termination Assemblies (Continued)

P0923LH

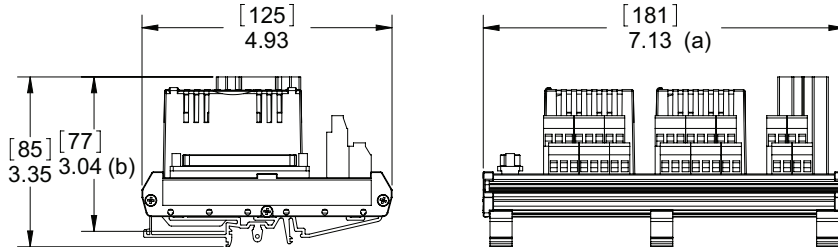


Ring Lug and Knife Switch Termination Assemblies


P0916RJ

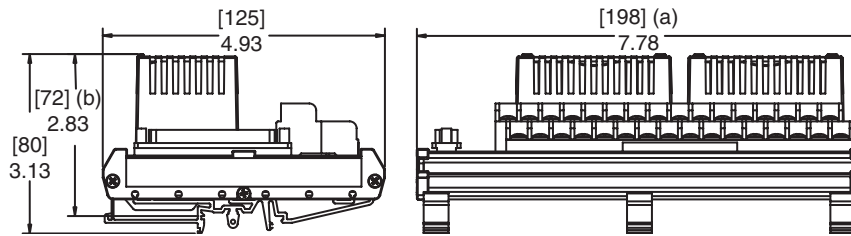

P0916RL

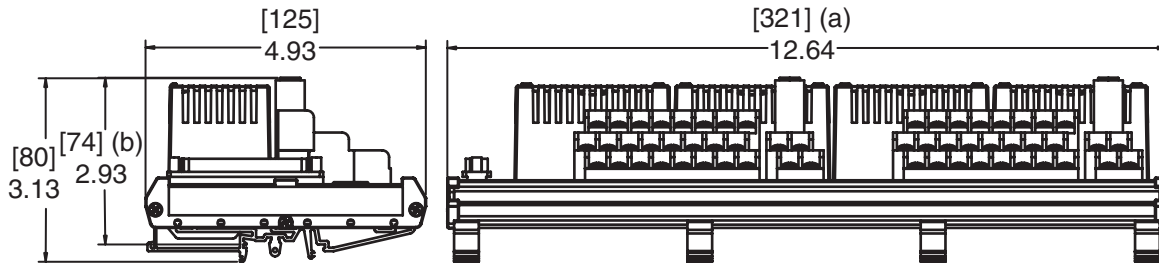

P0916RK

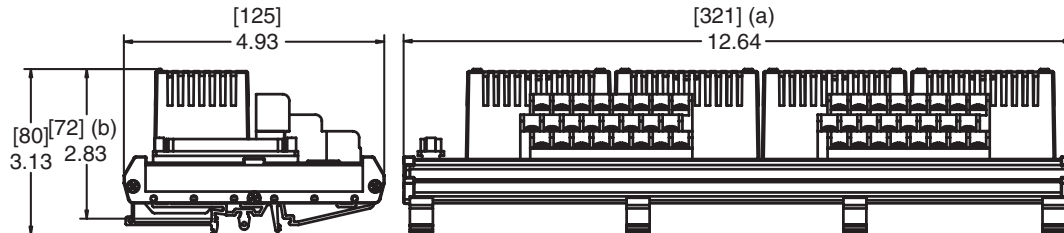


(a) Overall width – for determining DIN rail loading.
(b) Height above DIN rail (add to DIN rail height for total).

DIMENSIONS – NOMINAL (CONTINUED)


[mm]
in

Ring Lug and Knife Switch Termination Assemblies (Continued)

P0926BE

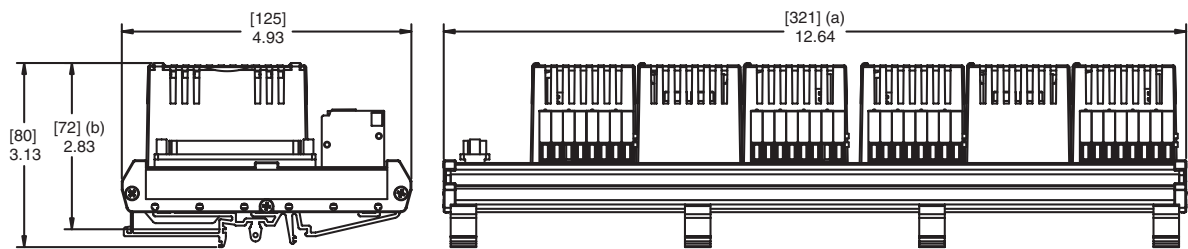

P0926DV

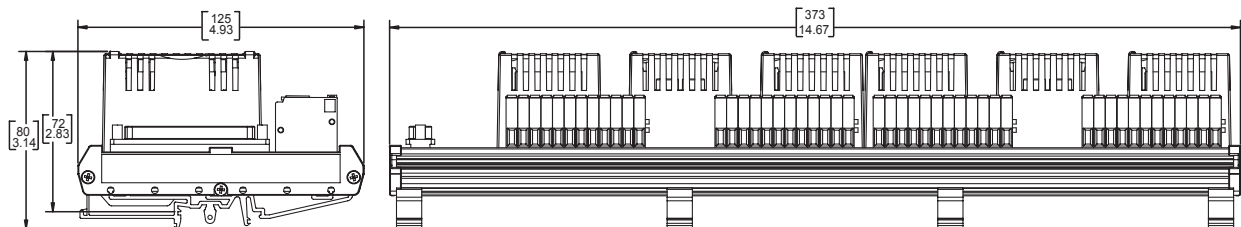

- (a) Overall width – for determining DIN rail loading.
- (b) Height above DIN rail (add to DIN rail height for total).

GENERAL PURPOSE PLUG-IN RELAY TERMINATION ASSEMBLY SPECIFICATIONS

Description

SPDT, plug-in, field replaceable

Rated Load

dc RESISTIVE

5 A at 30 V dc

dc INDUCTIVE (L/R = 7 MS)

5 A at 30 V dc

ac RESISTIVE

5 A at 240 V ac

ac INDUCTIVE (P.F. = 0.4)

5 A at 240 V ac

Carry Current

5 A

Maximum Operating Voltage

240 V ac, 30 V dc

Maximum Operating Current

5 A

Maximum Switching Capacity

1200 VA, 150 W

Minimum Permissible Load

100 mA, 5 V dc

Contact Material

AgCdO

Contact Resistance

30 m Ω maximum

Life Expectancy

MECHANICAL

20 X 10⁶ operations minimum

ELECTRICAL

100 X10³ (at rated load)

Response Time

OPERATE

15 ms maximum

RELEASE

ac

10 ms maximum

dc

5 ms maximum

RELATED PRODUCT SPECIFICATION SHEETS (PSS)

PSS Number	Description
PSS 21H-2W1 B3	DIN Rail Mounted FBM Subsystem Overview
PSS 21H-2W2 B3	DIN Rail Mounted FBM Equipment, Agency Certification
PSS 21S-3B2 B3	Control Processor 270 (CP270) Integrated Control Software



IPS Corporate Headquarters
5601 Granite Parkway Suite 1000
Plano, TX 75024
United States of America
www.ips.invensys.com

Foxboro Global Client Support
Inside U.S.: 1-866-746-6477
Outside U.S.: 1-508-549-2424 or
contact your local Foxboro
representative.
Facsimile: 1-508-549-4999

Invensys, Foxboro, and I/A Series are trademarks of
Invensys plc, its subsidiaries, and affiliates.
All other brand names may be trademarks of their
respective owners.

Copyright 1999-2009 Invensys Systems, Inc.
All rights reserved