

BPF-3219-Y

19" Fanless Panel PC with Touch Screen, V4 Eden, 2W Stereo Speaker, TV-Out, 4 COM, 3 USB, 12V DC Adapter

Panel PC



Features

- » Fanless, aluminum front panel design
- » 19" TFT color panel display w/resistive or SAW touch screen
- » VIA V4 Eden processor
- » VGA, dual Ethernet, Audio port
- » 2W Stereo Speaker
- » TV-Out function
- » 1 x 2.5" HDD space, 1 x slim CD-ROM space
- » 1 x CF socket
- » 4 x COM port, 3 x USB2.0 port
- » 12V DC adapter
- » Option for Wireless LAN module

System

LCD

Size: 19"
Max. Resolution: 1280 x 1024 pixels
Brightness: 300 cd/m²
Contrast Ratio: 800:1
Max. Color: 16.7M colors/RGB 8-bit
Pixel Pitch: 0.098 x 0.294 mm

Touch Screen

19" resistive or SAW (option)

SBC

HS-2613

CPU

VIA V4 Eden processor 1GHz

System Chipset

VIA CX700(M)

System Memory

1 x 200-pin SO-DIMM, DDR2 533MHz, Max. 1GB

Display Interface:

1 x D-SUB 15-pin
1 x TV-Out port

Audio Interface

Audio jack for MIC In, Line Out
2W Amplifier with Stereo Speaker

Ethernet Interface

2 x RJ-45 for Ethernet
1 x USB wireless LAN module (option)

Storage

1 x 2.5" HDD space
1 x slim CD-ROM space
1 x Type II CF socket

Watchdog Timer

Software programmable time-out intervals from 1~255 sec. or 1~255 min.

H/W Status Monitor

Monitoring temperatures, voltages status

Power

12V 60W DC adapter
+10V~30V DC IN

Operating/Storage Temperature

0~45°C/-20~+70°C

Certification

FCC/CE Class A compliance
IP65 front panel protection compliance


Dimensions

48.0(L) x 38.0(H) x 6.1(W) cm


Cut Out Size

43.4(L) x 34.9(H) cm

I/O Interface

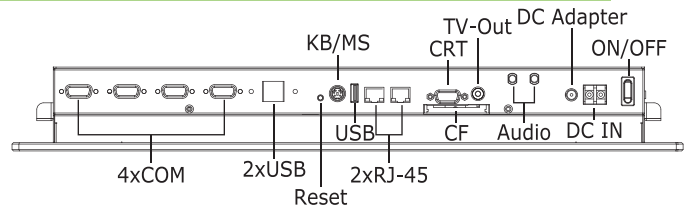

Dimensions (unit:cm)

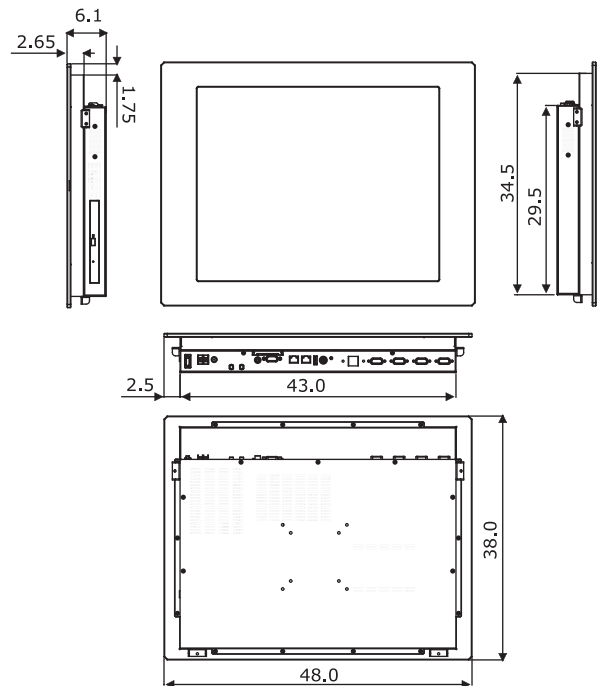

Ordering Information

BPF-3219-Y

19" Panel PC w/Resistive Touch Screen, Eden 1GHz CPU, 2W Stereo Speaker, TV-Out, 4 COM, 3 USB, 12V DC Adapter

Accessory Options

Table Top Metal Stand, SAW Touch Screen, Memory Module, CF Module, Wireless LAN Module, 2.5" HDD, Slim CD-ROM