

Open frame Power Supply

10~25 Watts Output Range

SSF-015/020/025 Series

Applications:

- Networking
- Data communications
- Compact equipment
- Peripheral equipment
- Terminal equipment
- Microcomputers

Features:

- Universal input
- Built-in Class B EMI filter
- Remote sense output
- Overvoltage protection
- Overpower protection
- Short-circuit protection
- Thermal protection
- Option AC socket

Specifications:



- Input voltage range: 90 ~ 264Vac
- Input frequency: 47 ~ 63Hz
- Inrush current: < 30A / 60A (cold start)
- Hold up time: 12 ~ 20 mS typical
- Efficiency: 65 ~ 75% typical
- Leakage current: 1mA typical
- Line regulation: 1%
- Load regulation: 2 ~ 4%
- MTBF: >150K hours

Output Specifications:

Model	3.3V	5V	12V	24V
SSF-0151-1	3.5A			
SSF-0151-2		2.5A		
SSF-0151-3			1.1A	
SSF-0151-4				0.6A
SSF-0152-1	3A	0.5A		
SSF-0152-2		2A	0.3A	

Model	3.3V	5V	12V	24V
SSF-0201-1	3A			
SSF-0201-2	5A			
SSF-0201-3		4A		
SSF-0201-4			1.8A	
SSF-0201-5				1A

Model	3.3V	5V	12V	24V
SSF-0251-1	6A			
SSF-0251-2		5A		
SSF-0251-3			2.2A	
SSF-0251-4				1.1A
SSF-0252-1	5A	1A		
SSF-0252-2		4A	0.5A	

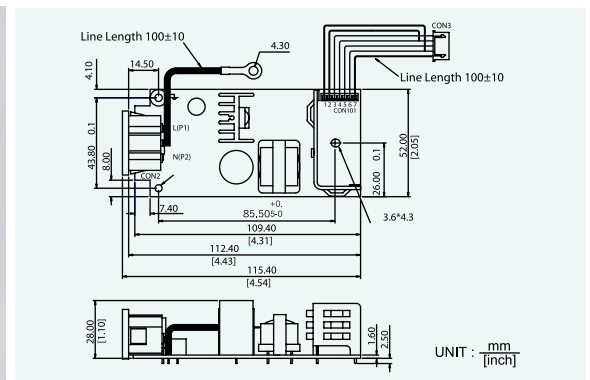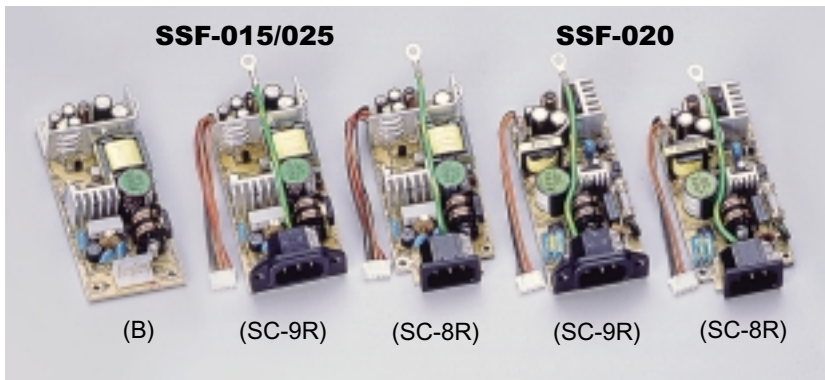

specification may change without prior notice



Sea Sonic Electronics Co., Ltd.

Head office:
8th Fl., #19 Alley 360, Sec.1, Neihu Road
Neihu Taipei, Taiwan ROC
tel: +886 2 2659 0338
fax: +886 2 2659 0530
sales@seasonic.com.tw

Factories:
I. Tao Yuan, Taiwan
II. Dong Guan, China

Europe office:
tel: +31 73 644 9288
fax: +31 73 511 2217
netherlands@seasonic.com

USA office:
tel: +1 626 969-9966
fax: +1 626 969-9986
usa@seasonic.com