


KVM-08B

1U 8-port KVM switch

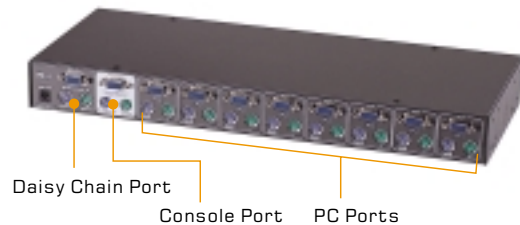

FEATURES

- 8 PCs share one console with One Screen Display
- Daisy Chain port allows max. access up to 64 PCs through eight banks of KVM-08B unit
- Support eight characters password protection and search PC name
- Support VGA resolution up to 1920x1440, 200MHz Bandwidth
- Support DOS, Win3.X, Win95/98/98SE/2000/ME, WinNT, Netware, Unix, Linux
- Supports PS/2 Type Keyboard/ Mouse connector
- No software Required-Easy PC selection via On Screen Display Menu, Push Buttons, Hot Keys
- No DIP switch setting needed and auto detect daisy chain bank
- Auto Scan Mode for monitoring PCs
- On Screen Display menu gives the user a visual interface to name and select computers
- Keyboard states automatically saved and restored when switching computers
- Keyboard and mouse can be hot plugged at any time
- Optional standard 19" rack mounting kit available
- Buzzer sound for switching port confirmation
- Microsoft IntelliMouse, Microsoft IntelliMouse Explorer, support and emulation

PACKING CABLE SET

180cm 3-in-1 cable One D-Sub 15-pin male header and two 6-pin Mini Din male headers	2pcs
90cm 3-in-1 cable One D-Sub 15-pin male header and two 6-pin Mini Din male headers	1pc
Mouse Converter	4pcs
Power Adapter DC 12V 1A (3 options: USA/Europe/Australia type)	1pc
User's Manual	1pc

OPTIONAL

	Model	Description
	KVM-CB-01	180cm 3-in-1 cable One D-Sub 15-pin male header and two 6-pin mini-DIN male headers
	KVM-CB-02	300cm 3-in-1 cable One D-Sub 15-pin male header and two 6-pin mini-DIN male headers

SPECIFICATION

PC Port : 8

Console Port : 1

Daisy Chain Port : 1

7 Segments Indicator : 3, 1 Selected Bank, 2 Selected Ports

Connectors (PC Port/ Console Port/

Daisy Chain Port) :

Keyboard : PS/2 keyboard 6-pin mini-DIN female

Mouse : PS/2 mouse 6-pin mini-DIN female

Video: VGA HDDB 15-pin type female

Daisy Chain and Levels : 8

MAX. PC connections : 64

Scan Intervals : 5~99 sec.

On Screen Display Control : Yes

PC Selection : On Screen Display Menu, Hot Key, Push button

Switching Confirmation : Beep

VGA Resolution : Support up to 1920 x 1440

Bandwidth : 200MHz

Power Adapter : DC 12V 1A Operation

Temperature : 0-40°C

Storage Temperature : -20~-60°C

Humidity : 0-80% Non-Condensing

Housing : Metal

Dimension (H x W x D) : 1U 19" Rack mount (47 x 410 x 165 mm)

Net Weight : 2.2 kg