

Approved	Checked	Designed	DEVELOPMENT SPECIFICATION	TEMPORARY		
	<i>H. W. J.</i>	<i>T. Tabatake</i>				

T Y P E	Green Light Emitting Diode					
APPLICATION	Indicators					
MATERIAL	InGaAlP					
OUTLINE	Attached					
ABSOLUTE MAXIMUM RATINGS	P	*1 I <sub>FP</sub>	I <sub>FDC</sub>	V <sub>R</sub>	Topr	Tstg
	55	60	20	4	-30~+85	-40~+100
	mW	mA	mA	V	°C	°C
CONDITION	Ta=25±3°C					


Test Specification

I t e m	Symbol	C o n d i t i o n	Typ	Limit		Unit
				Min	Max	
Forward Voltage	V <sub>F</sub>	I <sub>F</sub> =10mA	2.03		2.5	V
Reverse Leakage Current	I <sub>R</sub>	V <sub>R</sub> = 4V			10	μA
Luminous Intensity *2	I <sub>O</sub>	I <sub>F</sub> =10mA DC	22	11		mcd
Peak Emission Wavelength	λ <sub>p</sub>	I <sub>F</sub> =10mA DC	575			nm
Spectral Line Half Width	Δλ	I <sub>F</sub> =10mA DC	15			nm

- \*1. The Condition of I<sub>FP</sub> is duty 10%, Pulse width 1 ms  
 \*2. Tolerance of luminous intensity: ±20%.

NOTE

- ★1. Please contact the Panasonic local office if you design at low current (below 1mA DC) or pulse current operation and have any questions.
- ★2. Soldering conditions...Refer to Handling note.
- ★3. Compositions of the lead ... Cu/Ni/Au plating
- ★4. Package...Clear type.
- ★4. Beware of destruction by static electricity in handling the LED.
- ★5. Circuit to operate LED.

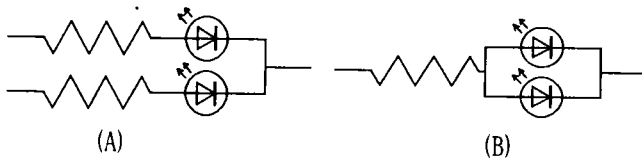

- (A) Recommended circuit.  
 (B) The difference of brightness between the LED could be found due to the V<sub>F</sub> characteristics of each LED.





Mar. 26. 2001			

Approved	Checked	Designed
	<i>H. W.</i>	<i>T. Tabata</i>

DEVELOPMENT SPECIFICATION



P/N: LNJ316C83RA

TEMPORARY

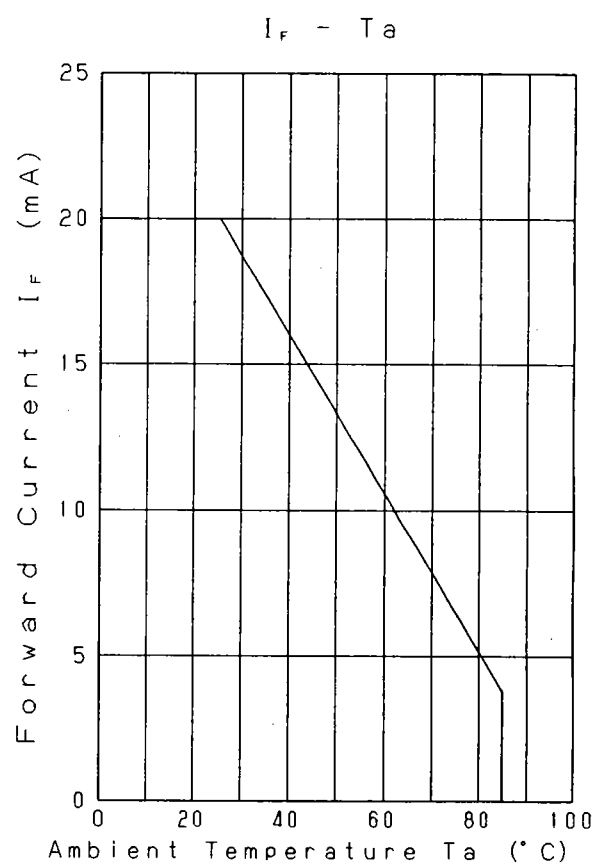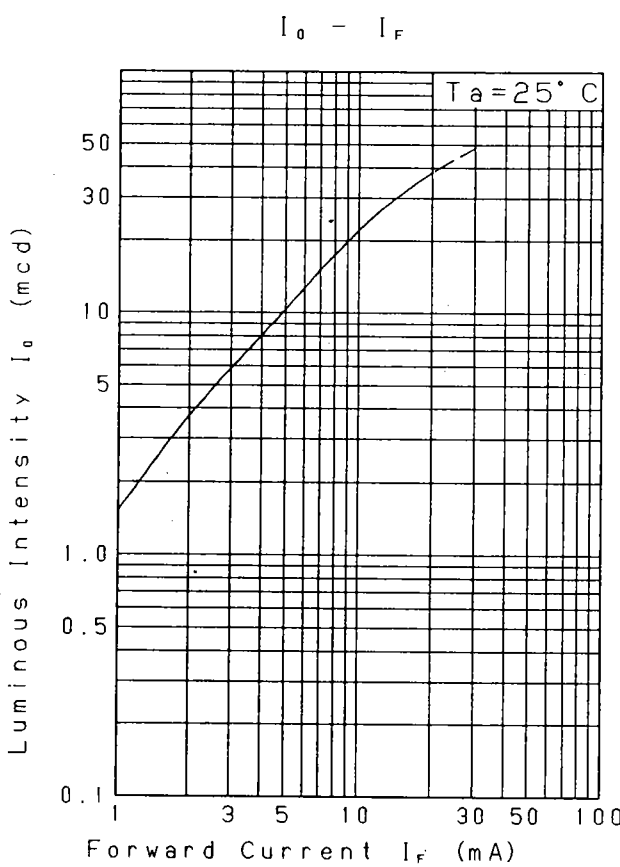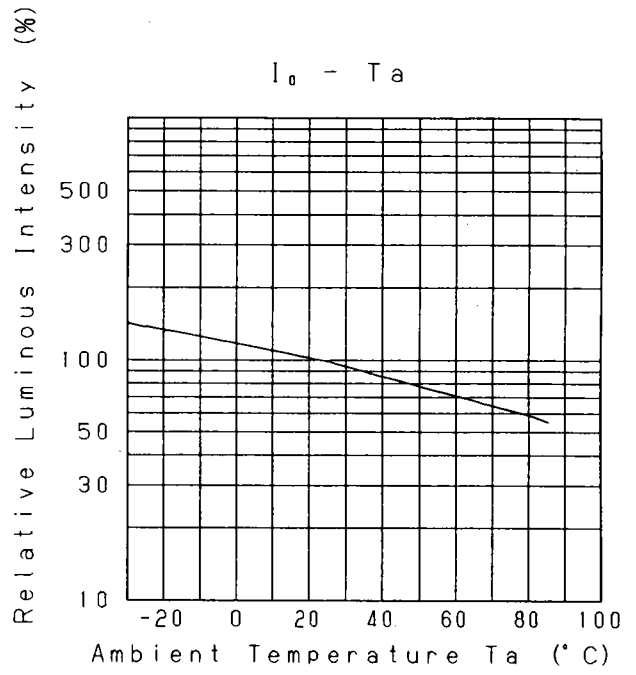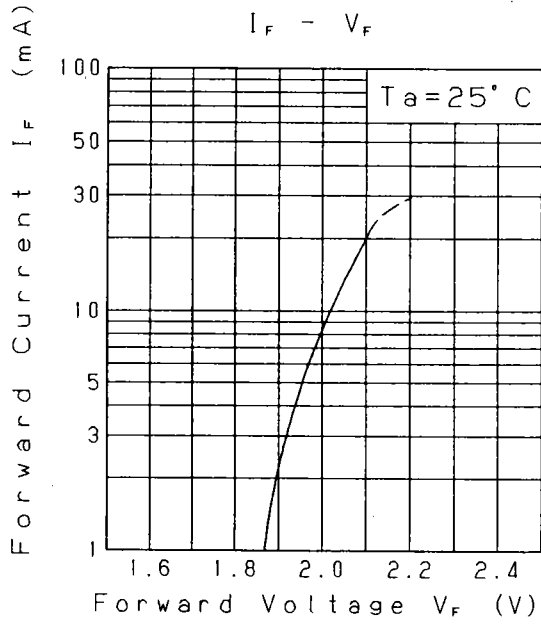

Mar. 26. 2001			

Approved	Checked	Designed	DEVELOPMENT SPECIFICATION	TEMPORARY
	<i>M. hi</i>	<i>T. Takata</i>		



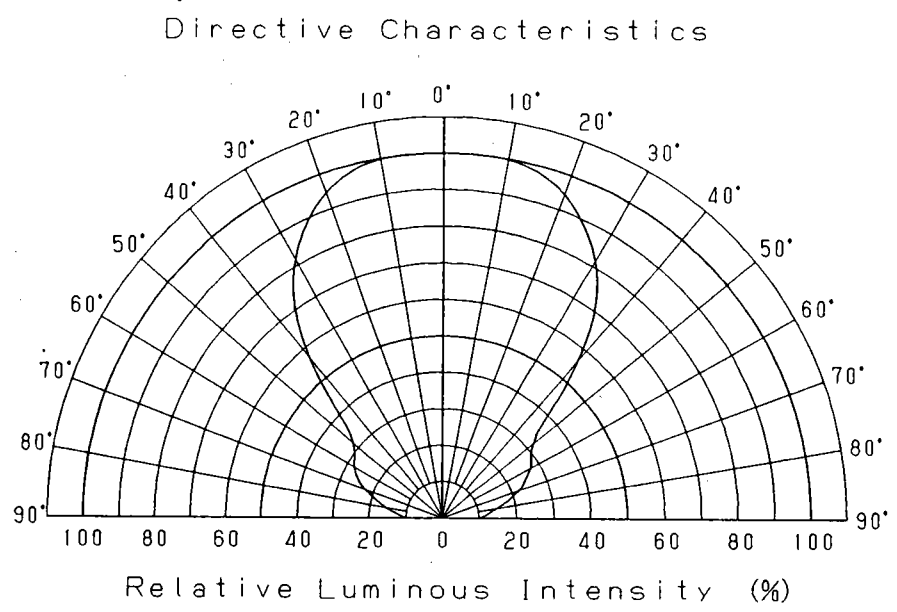
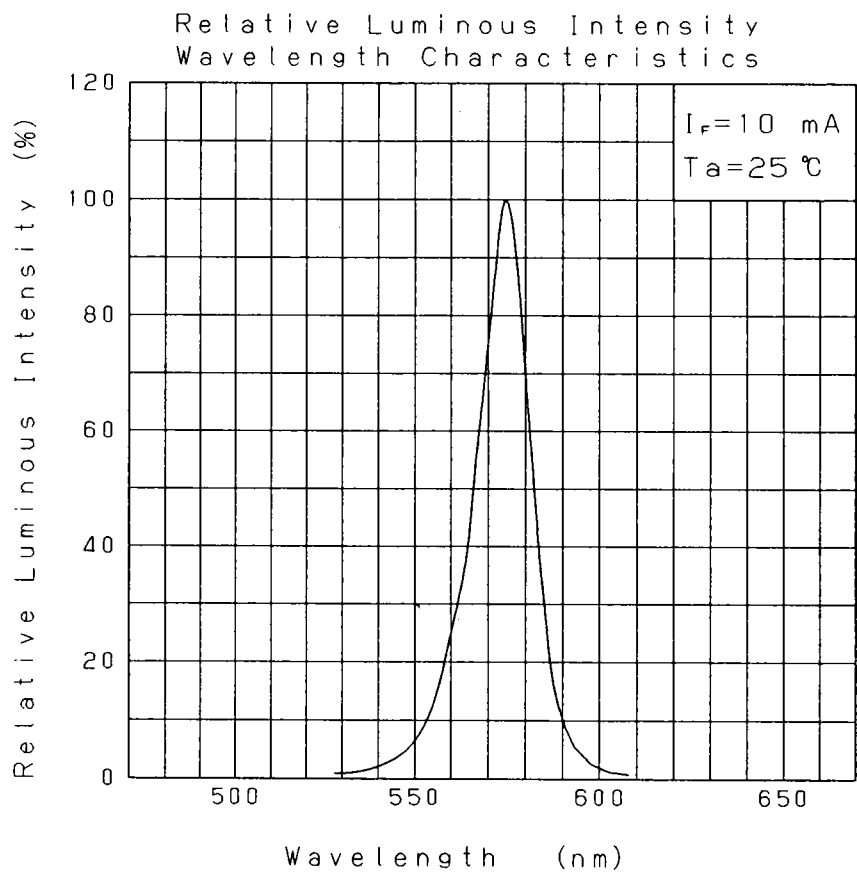


Mar. 26, 2001		


Approved	Checked	Designed
	<i>M. H.</i>	<i>T. Tabata</i>

DEVELOPMENT SPECIFICATION  
(OUTLINE)  
P/N: LNJ316C83RA

TEMPORARY

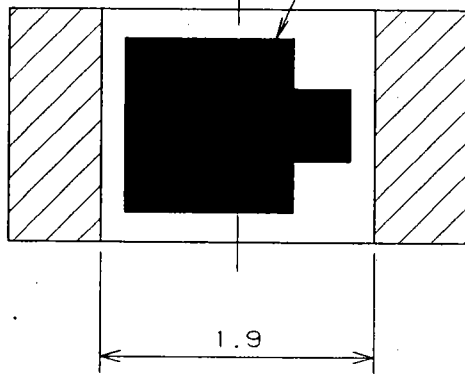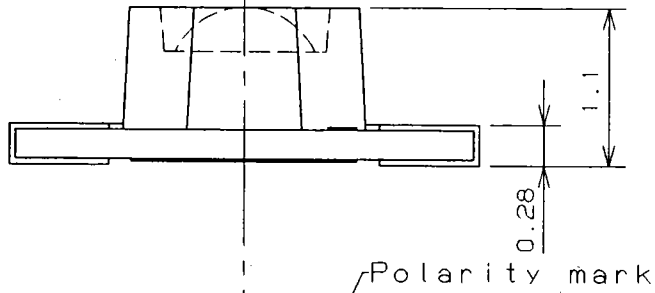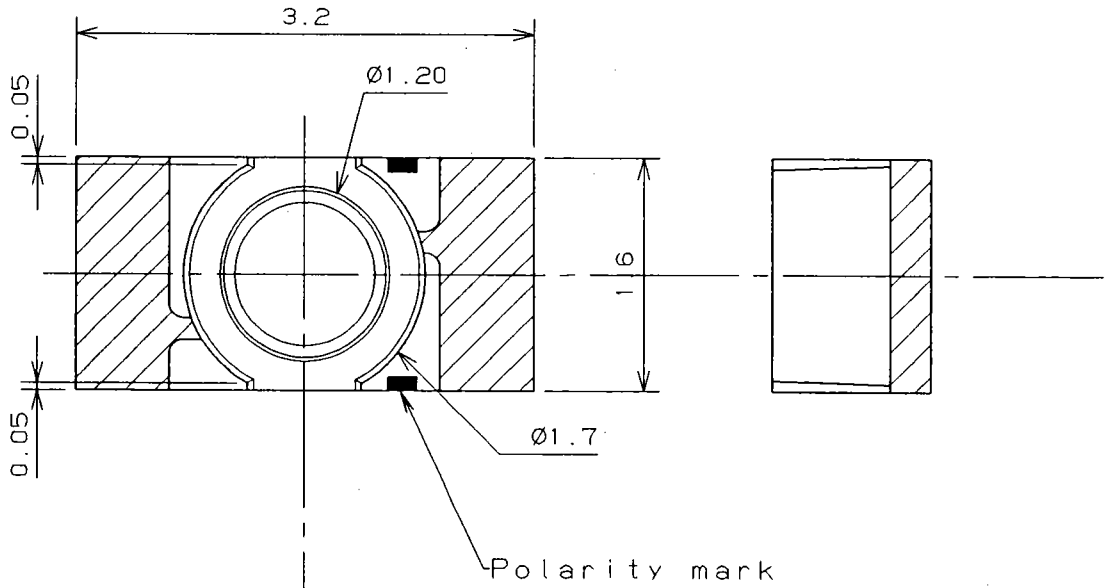

(NOTE)

1. Unit: mm
2. Tolerance unless specified is  $\pm 0.15$ .
3.  indicate Au terminal.

Mar. 26. 2001