


Applications

- Database Server
- File Server
- Enterprise Storage Server
- CCTV Surveillance DVR

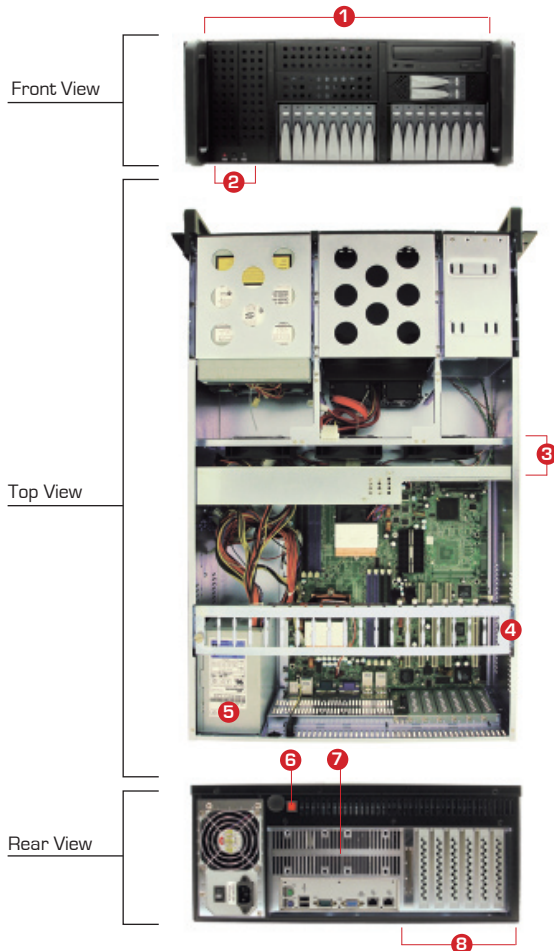

Features & Benefits

- 1 Ten(10) external 5.25-inch optical bays supported
- 2 LEDs for RES, I/O & PWR
- 3 Three(3) middle fans for optimized cooling
- 4 Hold down bar to ensure that HBA cards are locked into positions
- 5 PS/2 size single or redundant power supply options
- 6 Rear access power supply alarm reset
- 7 Two(2) rear fan slots for upgrade
- 8 Seven(7) PCI slots attribute to network expansion and scalability

VTC486645

Model Number : VTC486645	
Order Information : VTC486645 ●	
Industry Standard : EIA-RS310D	
Materials : Heavy-duty cold-rolled steel	
Finish :	Inside / Body : Zinc-plated with bright chromate
	Outside / Front : Texture-coated
Dimensions : (W x D x H)	mm : 482.6 x 673.1 x 177.8
	inches : 19 x 26.5 x 7
Cooling :	Middle: 3 x 90mm fans (+ optional 2 x 60mm fans)
	● Descriptions Comes with 650W hot-swap redundant PFC
Power Supply :	
Expansion : 7 x PCI slots (full height, full length)	

Controls : Power on/off, system reset		
Indicators : Power LED		
System Board : 12"(W) x 13"(D) E-ATX/SSI EEB 3.6 compliant MB		
Drive Bay :	External	5.25" : 10 3.5" : 0 3.5" hot-swap : 0
	Internal	2.5" hot-swap : 0 3.5" : 0
		Slim CD-Rom/DVD-Rom : 0
	Slim FDD : 0	
Temperature : 0°C(32°F) ~ 50°C(122°F)		
Humidity : 5%~95% non-condensing		
Gross Weight (lbs) : 21 kgs / 46.2 lbs		
Packaging Dimension (W x D x H) :		mm : 850 x 590 x 330
Cubic Feet : 5.9		
Reference Container Loading :	20'	175
	40'	355
	40' H	395
Mounting Options :	VTC2412	VTC2411
		VTC2416

Mechanical Drawing

