


# BBS-2010

Fanless, Box PC with ULV Intel® C-M 600MHz, CF, +5V DC In

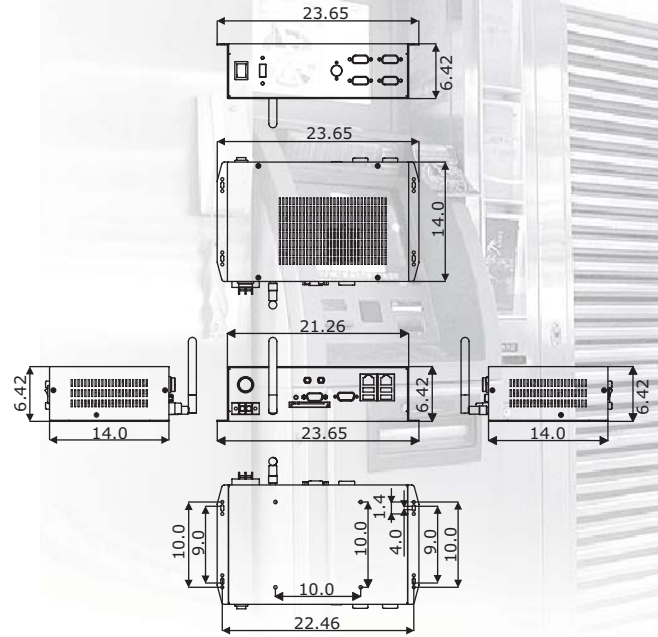

## Features

- Fanless, box PC design
- Built-in HS-2610M+ULV Intel® C-M processor 600MHz/512K, +5V DC in
- 1 x 2.5" HDD space
- BBS-2010-F provides CF, 4 x COM, 5 x USB2.0
- Option for 5V/12V DC adapter
- Option for Wireless LAN module

## System

### SBC Model

HS-2610M

### CPU

ULV Intel® Celeron® M processor 600MHz/512K

### BIOS

AMI PnP Flash BIOS

### System Chipset

Intel® 852GM/ICH4

### System Memory

1 x 200-pin SO-DIMM socket up to 1GB DDR SDRAM

### Display Chipset

Intel® 852GM

### Audio Chipset

RealTek ALC202A

### Ethernet Chipset

Intel® 82551QM and 82562ET dual 10/100 Mbps LAN

Provides Wireless LAN module (option)

### Drive Bay

1 x 2.5" HDD space

### Storage

1 x Type II CF socket

### Watchdog Timer

Software programmable time-out intervals from 1~255 sec.

## Mechanical

### Dimensions (LxHxW)

23.65 x 6.42 x 14.0 cm

### Operation/Storage Temperature

0~+45 degrees C/-20~+70 degrees C

### EMC

FCC/CE

### Power Adapter



+5V DC in or option 5V/12V DC in 42W adapter

## I/O Interface

### External I/O

4 x COM, PS/2 KB/MS, 5 x USB2.0, MIC In, Audio Out, VGA, CF, 2 x LAN

### Rear I/O

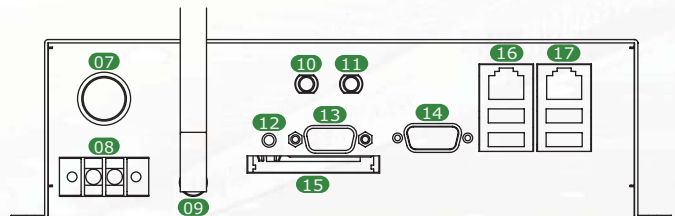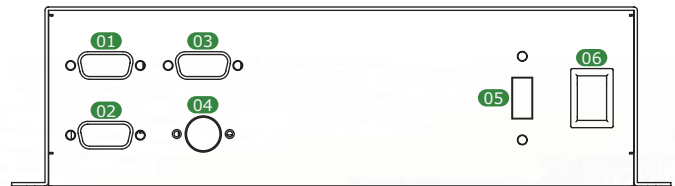

- |                       |                   |                      |
|-----------------------|-------------------|----------------------|
| 01. COM 2             | 07. DC Adapter In | 13. VGA              |
| 02. COM 3             | 08. +5V DC In     | 14. COM 1            |
| 03. COM 4             | 09. WLAN ANT      | 15. CF               |
| 04. KB/MS             | 10. MIC In        | 16. LAN + USB2.0 * 2 |
| 05. USB2.0            | 11. Audio Out     | 17. LAN + USB2.0 * 2 |
| 06. Main Power ON/OFF | 12. Reset Button  |                      |

## Ordering Guide

### BBS-2010-F

Fanless, Box PC with HS-2610M(w/600MHz CPU, CF), +5V DC In

### Accessory Options

Memory Module, CF Module, Wireless LAN Module, 2.5" HDD, 5V/12V DC Adapter