



WAFER-LX-R12

3.5" SBC with AMD® Geode LX800 onboard Processor VGA/ LVDS/ TTL, Dual LAN and SATA

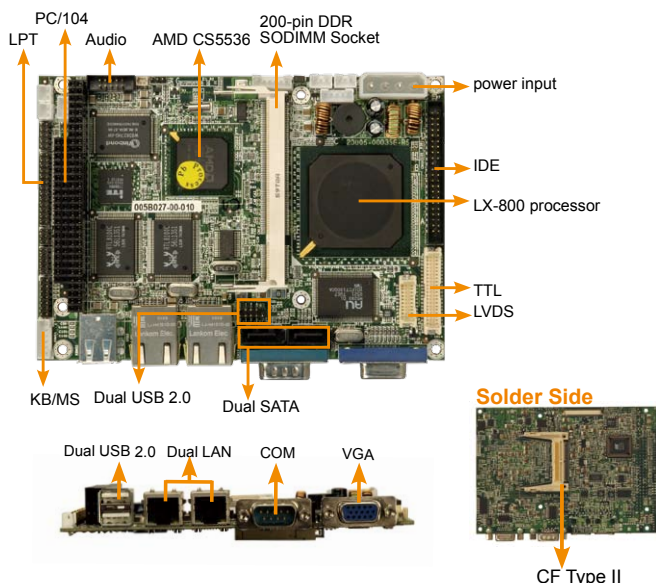

WAFER-LX2-R11

3.5" SBC with AMD® Geode LX800 Processor, 8 COM, DDR 400MHz, VGA/ LVDS/TTL Display Interfaces, PC/104, 4 x USB 2.0 & Embedded OS Support

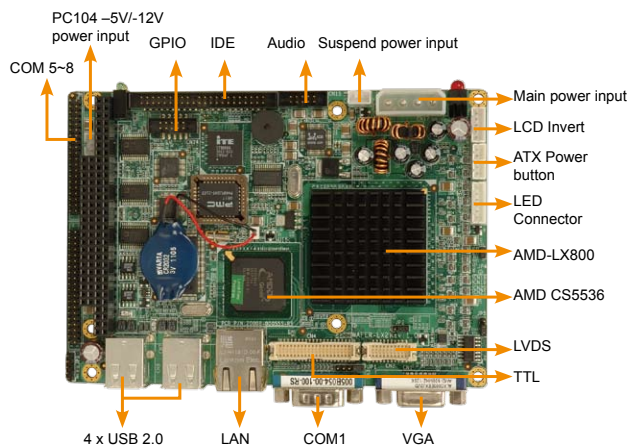

Features

1. 3.5" form factor, AMD® LX800 processor embedded board with RoHS compliant
2. DDR 333/400MHz SO-DIMM SDRAM up to 1GB
3. Complete I/O support with 2xSATA, IDE, CF Type II, PC/104, dual LAN and 4xUSB 2.0
4. 24-bit TTL/ 18-bit single channel LVDS
5. Value embedded applications with low power, fanless design support Windows® XP/ CE/XPe
6. The best choice for Thin Client. Windows® CE 5.0, XPe OS image with ICA, RDP and IE APs ready

Specifications

- ◆ CPU
On board AMD® Geode™ LX800 (500MHz) processor
- ◆ System Chipsets
AMD® Geode LX800 + AMD® CS5536
- ◆ BIOS
Award BIOS
- ◆ System Memory
One 200-pin 400/333MHz DDR SDRAM SO-DIMM Supported (System max. 1GB)
- ◆ Ethernet
10/100Mbps dual RTL8100C Ethernet Chipsets
- ◆ I/O Interface
4 x USB 2.0
2 x SATA with VIA VT6421A RAID 0, 1 function support
1 x LPT
1 x CF Type II
2 x RS-232
1 x RS-422/485
1 x PS/2 for KB/MS
1 x IDE
- ◆ Expansions
1 x PC/104
- ◆ Digital I/O
8-bit digital I/O, 4-bit input/ 4-bit output by super I/O
- ◆ Super I/O
W83627EHG
- ◆ Audio
Realtek ALC203 with AC'97 Codec
- ◆ Display
VGA integrated in AMD® Geode LX800
24 bit TTL
18-bit single channel LVDS
- ◆ Infrared Interface
1 x Infrared Interface by pin hearer
- ◆ Watchdog Timer
Software programmable supports 1~255 sec. system reset
- ◆ Power Supply
5V only, AT/ATX power support
- ◆ Power Consumption
5V@1.53A (AMD® LX800 with DDR 400MHz/ 1GB)
- ◆ Temperature
Operating: 0° to 60°C
- ◆ Humidity
Operating: 5% to 95%, non-condensing
- ◆ Dimensions
146 mm x 102 mm
- ◆ Weight
GW: 670 g; NW: 230 g

Packing List

- 1 x WAFER-LX800 Single board computer
- 1 x Audio Cable (P/N: 32000-072100-RS)
- 1 x IDE Flat Cable 44p/44p (P/N: 32200-000009-RS)
- 2 x SATA Cable (P/N: 32000-0628000-RS)
- 1 x SATA Power Cable (P/N: 32100-088600-RS)
- 1 x RS-232/422/485 Cable (P/N: 32200-026500-RS)
- 1 x KB/MS Y Cable (P/N: 32000-023800-RS)
- 1 x USB Cable (P/N: 32000-070301-RS)
- 1 x Mini Jumper Pack
- 1 x Utility CD
- 1 x QIG

Ordering Information

Part No.	Description
WAFER-LX-800-R12	3.5" SBC with AMD® LX 800 Processor, Audio, VGA/LVDS/ TTL, Dual LAN and SATA Connectors
32200-015100-RS	LPT Cable

Features

1. 3.5" Form Factor with AMD® Geode™ LX800 CPU
2. DDR 333/400MHz SO-DIMM Socket up to 1GB
3. VGA, 24-bit TTL, 18-bit LVDS display interface
4. 7 x RS-232 and 1 x RS-232/422/485

Specifications

- ◆ CPU
On board AMD® Geode™ LX800 (500MHz) processor
- ◆ System Chipsets
AMD® Geode™ LX800 + CS5536
- ◆ BIOS
Award BIOS
- ◆ System Memory
One 200-pin 400/333MHz DDR SDRAM SO-DIMM Supported (System max. 1GB)
- ◆ Ethernet
10/100Mbps Single RTL8100C Ethernet Chipsets
- ◆ I/O Interface
7 x RS-232
1 x RS-232/422/485
4 x USB 2.0
1 x IDE
- ◆ Expansions
PC/104 (ISA Bus)
- ◆ Digital I/O
8-bit digital I/O, 4-bit input/ 4-bit output
- ◆ Display Interface
VGA Integrated in AMD® Geode LX800
24-bit TTL
18-bit single channel LVDS
- ◆ Audio
Realtek ALC203 with AC'97 codec
- ◆ SSD
CF Type II
- ◆ Watchdog Timer
Software programmable supports 1 ~255 sec. system reset
- ◆ Power Supply
5V only, AT/ATX support
- ◆ Power consumption
5V@1.33A (AMD® LX800 with DDR 400MHz/ 1GB)
- ◆ Temperature
Operating: 0°C ~ 60°C (32°F~ 140°F)
- ◆ Humidity
Operating: 5% ~95% non-condensing
- ◆ Dimensions
146 mm x 102 mm
- ◆ Weight
GW: 670 g; NW: 230 g

Packing List

- 1 x WAFER-LX2 Single board computer
- 1 x Mini Jumper Pack
- 1 x IDE flat cable 44p/44p (P/N: 32200-000009-RS)
- 2 x 4 RS-232 Adapter cable (P/N: 32200-025401-RS)
- 1 x Audio cable (P/N: 32200-072100-RS)
- 1 x Utility CD
- 1 x QIG

Ordering Information

Part No.	Description
WAFER-LX2-800-R11	3.5" SBC with AMD Geode LX800 Processor, Audio, VGA/ LVDS, TTL/LVDS, 4xUSB 2.0, 7 x RS-232 and 1 x RS-232/422/485
IO-KIT-4COM-R10	4 COM Ports Adapter Board

1
Industrial Computing Solutions2
Embedded Computing Solutions3
RISC-Based Embedded Solutions4
Industrial Data Collector/ Server Solutions5
Video Capture Solutions6
I/O Communication Solutions7
Panel Solutions8
Power Supply/ Network Communication/ Peripherals