


» microETXexpress[®]-PC «

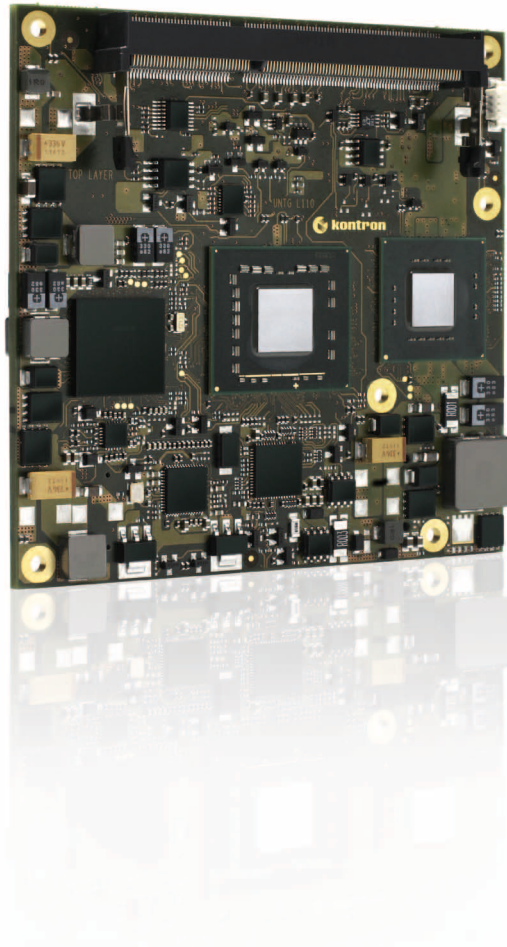

COM 
Express[®]

C  **US**

Highest performance on just 95x95 mm

- » Up to Intel[®] Core[™] 2 Duo in 45nm
- » COM Express[®] compact, Pin-out Type 2
- » Intel[®] GS45 and DDR3 memory
- » Highest performance with ultra low voltage

microETXexpress®-PC

Highest performance on COM Express® compact

Technical Information

Processor	Intel® Core™2 Duo up to 1.86 GHz, 45 nm Intel® Celeron® M Processor 722 and 723 with 1.2 GHz, 45nm
Chipset	Intel® GS45, Intel® ICH9M SFF
Memory	Up to 4 GB DDR3 S0-DIMM (667/800/1066 MHz)
Hard Disk	3x SerialATA 300 (AHCI; RAID 0, 1), 1x PATA
USB	8x USB 2.0
PCI	PCI 2.3, 32 bit/33 MHz
PCI Express	5 PCI Express x1 (1 PCI Express x4 possible), 1 PEG x16
Ethernet	10/100/1000 Mbit Ethernet, Intel® 82567
Sound	Intel® High Definition Audio
Video Controller	Intel® GMA X4500 integrated in Intel® GS45 (DirectX® 10, PS 4.0, up to 1024 MB with DVMT 5.0), 1 PEG x16 Dual SDVO multiplexed with PEG, HDMI and DisplayPort support
Display Interfaces	Single/Dual LVDS 18/24 bit up to UXGA LVDS up to UXGA (1600x1200), CRT up to QXGA (2048x1536) Dual SDVO, HDMI, DisplayPort, JILI support
Operating Systems	Windows® 7, Windows Vista®, Windows® XP, Windows® XP Embedded, Windows® CE, Linux, VxWORKS and others
Security Features	TPM 1.2 integrated in ICH9M SFF, HDCP 1.2
Other Features	ACPI 3.0, LPC, K-station and JIDA support, Watchdog, RTC, JRC support, Fast I²C
Form Factor	COM Express® compact: 95x95mm Pin-out Type 2
Power Consumption	typ. Idle ~7.5W @ Intel® Core™2 Duo SU9300 8.5 V – 18 V Wide Range Power Supply
Temperature (*)	Operation: 0° to 60°C Storage: -30° to 85°C
Humidity	Operation: 10% to 90% Storage: 5% to 95% (non condensing)

(*) Ask about extended temperature ranges

Ordering Information

Article	Part-No.	Description
microETXexpress®-PC SL9400	36004-0000-19-2	Intel® Core™2 Duo SL 9400 Low Voltage, 1.86 GHz, 6 MB L2 Cache
microETXexpress®-PC SU9300	36004-0000-12-2	Intel® Core™2 Duo SU 9300 Ultra Low Voltage, 1.2 GHz, 3 MB L2 Cache
microETXexpress®-PC 722	36004-0000-12-1	Intel® Celeron® M Processor 722 (5.5W TDP) Ultra Low Voltage, 1.2 GHz, 1 MB L2 Cache
microETXexpress®-PC 723	36004-0000-12-3	Intel® Celeron® M Processor 723 (10W TDP) Ultra Low Voltage, 1.2 GHz, 1 MB L2 Cache
HSP microETXexpress®-PC, threaded	36004-0000-99-0	Heatspreader for microETXexpress®-PC, threaded stand off
HSP microETXexpress®-PC, through	36004-0000-99-1	Heatspreader for microETXexpress®-PC, through hole stand off
HSK microETXexpress®-PC, w/o Fan	36004-0000-99-0C02	Passive Heatsink for microETXexpress®-PC, threaded stand-off, w/o fan
HSK microETXexpress®-PC, w/ Fan	36004-0000-99-0C01	Active Heatsink for microETXexpress®-PC, threaded stand-off, w/ fan

CORPORATE OFFICES

Europe, Middle East & Africa

Oskar-von-Miller-Str. 1
85386 Eching/Munich
Germany
Tel.: +49 (0)8165/ 77 777
Fax: +49 (0)8165/ 77 279
info@kontron.com

North America

14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: +1 888 294 4558
Fax: +1 858 677 0898
info@us.kontron.com

Asia Pacific

17 Building, Block #1, ABP.
188 Southern West 4th Ring Road
Beijing 100070, P.R.China
Tel.: + 86 10 63751188
Fax: + 86 10 83682438
info@kontron.cn



#microETXexpress-PC 02112011PDL
All data is for information purposes only and not guaranteed for legal purposes. Subject to change without notice. Information in this datasheet has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies.
All brand or product names are trademarks or registered trademarks of their respective owners. P1CMG and the P1CMG logo and COM Express® and the COM Express® logo are registered trademarks of the PCI Industrial Computer Manufacturers Group.