

## Pico-ITX Series

# VIA EPIA PX


Pico-ITX C7®/Eden™ ULV  
Board with MPEG-2 &  
4, WMV9 and LVDS/DVI  
Support

## Features

- Integrated VIA UniChrome™ Pro II 3D/2D AGP graphics with MPEG-2/4 and WMV9 decoding acceleration
- Supports DDR2 533/667 SDRAM (SODIMM)
- Audio connector for Line-in, Mic-in, S/PDIF in, and 5.1 channels audio output
- Low profile design: All back panel I/O in pin header format except for the RJ-45 LAN and VGA port




## Board Placement

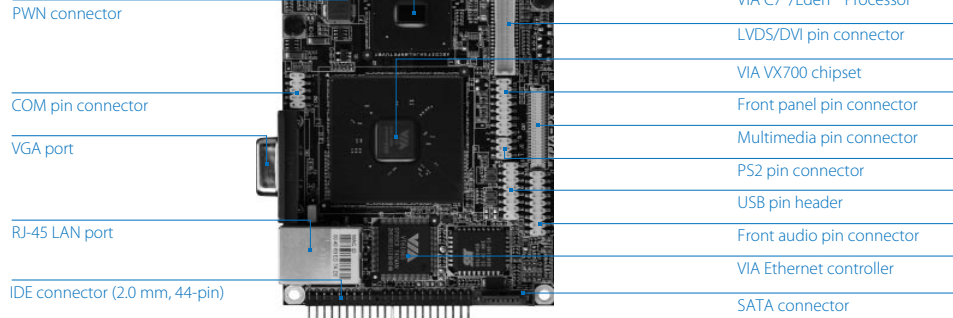



## Specifications

Model Name	EPIA PX10000G	EPIA PX5000EG
<b>Processor</b>	1.0GHz VIA C7®	500MHz VIA Eden™ ULV
<b>Chipset</b>	VIA VX700 Unified Digital Media IGP chipset	
<b>System Memory</b>	1 x DDR2 533/667 SODIMM socket (effective speed to 533MHz) Up to 1GB memory size	
<b>VGA</b>	Integrated VIA UniChrome™ Pro II 3D/2D AGP graphics with MPEG-2/4 and WMV9 decoding acceleration	
<b>Onboard IDE</b>	1 x UltraDMA 133/100/66 connector (2.0 mm 44-pin header)	
<b>Onboard Serial ATA</b>	1 x SATA connector	
<b>Onboard LAN</b>	1 x VIA VT6106S 10/100 Mbps Ethernet controller	
<b>Onboard Audio</b>	VIA VT1708A High Definition Audio Codec	
<b>Onboard I/O Connectors</b>	1 x USB connector for 4 USB 2.0 ports 1 x COM port connector 1 x PS2 mouse/keyboard connector 1 x LVDS/DVI pin connector, for 18/24-bit dual channel LVDS panel (if without using DVI) 1 x Multimedia connector to support external TV-out interface, video capture port interface and low pin count interface (an add-on card is required) 1 x Audio connector for Line-in, Mic-in, S/PDIF in, and 5.1 channels audio output 1 x Fan connector for CPU fan 1 x Pico-ITX power connector	
<b>Back Panel I/O</b>	1 x RJ-45 LAN port 1 x VGA port	
<b>BIOS</b>	Award BIOS 4/8Mbit flash memory	
<b>Operating System</b>	Windows XP, Linux, Win CE, XPe	
<b>System Monitoring Management</b>	CPU temperature reading (manufacturing option) Watch Dog Timer (manufacturing option) Keyboard Power-on, Time Power-on System power management AC power failure recovery	
<b>Operating Temperature</b>	0°C ~ 50°C	
<b>Operating Humidity</b>	0% ~ 95% (relative humidity; non-condensing)	
<b>Form Factor</b>	Pico-ITX (10-layer) 10 cm x 7.2 cm	


## Back Panel I/O

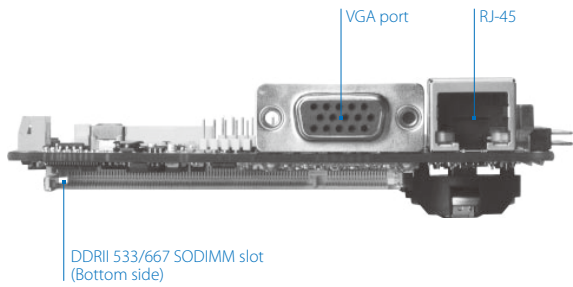

## Accessories



**PWB-N550PG**  
DC-DC power board: 12-24V input/120W output




**WLAN USB Module**  
802.11 b/g standards

## Ordering Information

Model Name	CPU Frequency	Description
PX10000G	1.0GHz C7®	Pico-ITX Board with 1.0GHz C7® CPU, VGA, USB, LAN, LVDS, DVI, COM, IDE & SATA
PX5000EG	500MHz Eden™ ULV	Pico-ITX Board with 500MHz Eden™ ULV CPU, VGA, USB, LAN, LVDS, DVI, COM, IDE & SATA

## Block Diagram

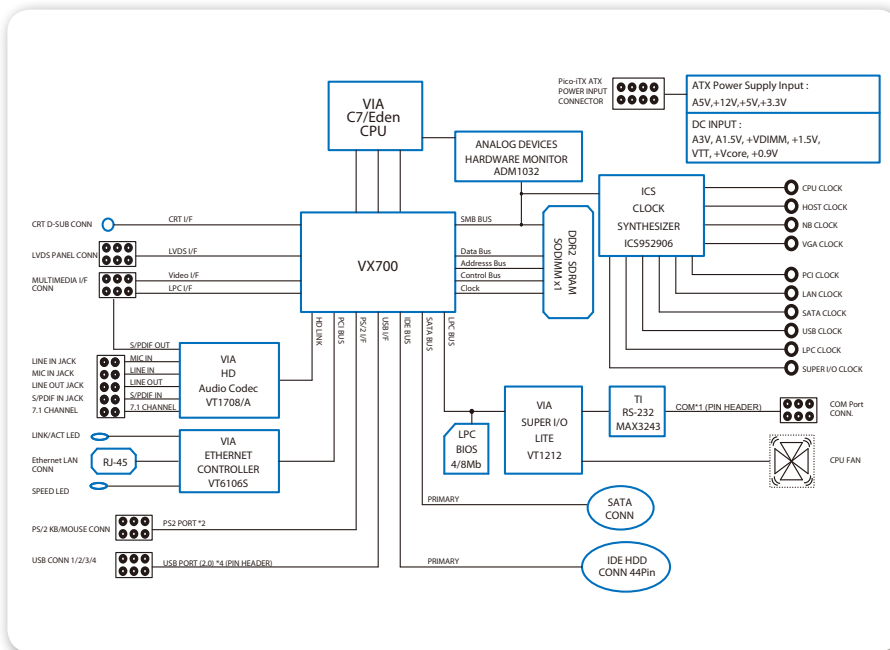

## Packing List

### Items

- 1 x USB2.0 ribbon cable
- 1 x ATA-66/100/133 IDE ribbon cable
- 1 x PS/2 ribbon cable
- 1 x Power port cable
- 1 x COM port ribbon cable
- 1 x DVI ribbon cable
- 1 x Driver Utility CD
- 2 x Screws (for the VGA port)