

Features

- Ultrawide 4 : 1 Input Range
- High Efficiency up to 86%
- Extended Operating Temperature Range - 40°C to +81°C
- Indefinite Short-Circuit Protection
- I/O-Isolation 1500 VDC
- Input Filter meets EN 55022, Class A and FCC, Level A without external Components
- Remote On/Off
- Industry Standard Pinout
- Six-Side Shielded Case
- 3 Year Product Warranty



The TEN 15WI series of DC/DC converters, comprising 10 different models, has been designed for a wide range of applications including communications, industrial systems and battery powered equipments. Full SMD-design with use of ceramic chip capacitors guarantees a high reliability and a long lifetime. Other features of this converters are internal filter to meet EN 55022, class A and FCC, level A and an extended temperature range of -40°C to +85°C.

Models

Ordercode	Input voltage range	Output voltage	Output current max.	Efficiency typ.
TEN 15-2410WI TEN 15-2411WI TEN 15-2412WI TEN 15-2422WI TEN 15-2423WI	9 – 36 VDC	3,3 VDC 5,1 VDC 12 VDC ± 12 VDC ± 15 VDC	3'000 mA 2'950 mA 1'250 mA ± 625 mA ± 500 mA	78 % 82 % 85 % 85 % 86 %
TEN 15-4810WI TEN 15-4811WI TEN 15-4812WI TEN 15-4822WI TEN 15-4823WI	18 – 75 VDC	3,3 VDC 5,1 VDC 12 VDC ± 12 VDC ± 15 VDC	3'000 mA 2'950 mA 1'250 mA ± 625 mA ± 500 mA	78 % 82 % 85 % 85 % 86 %

Input Specifications

Input current at no load	24 Vin models: 48 Vin models:	25 mA typ. 15 mA typ.
Input current at full load	24 Vin; 3.3 Vout models: 24 Vin; other output models: 48 Vin; 3.3 Vout models: 48 Vin; other output models:	528 mA typ. 740 mA typ. 264 mA typ. 370 mA typ.
Surge voltage (100 msec. max.)	24 Vin models: 48 Vin models:	50 V max.. 100 V max.
Conducted noise (input)	EN 55022 level A, FCC part 15, level A	

Output Specifications

Voltage set accuracy	± 1 %	
Regulation	– Input variation Vin min. to Vin max. – Load variation 10 – 100 %	± 0.5 % max. ± 1 % max.
Ripple and noise (20 MHz Bandwidth)	80 mVpk-pk max.	
Temperature coefficient	± 0.02 % / K	
Output current limitation	> 110% of Iout max., foldback	
Short circuit protection	indefinite (automatic recovery)	
Capacitive load	single output models: dual output models:	470 µF max. 220 µF max.

General Specifications

Temperature ranges	– Operating – Case temperature – Storage	– 40 °C ... + 85 °C + 100 °C max. – 55 °C ... + 125 °C
Derating	3.5%/K above 70°C	
Humidity (non condensing)	95 % rel H max.	
Reliability, calculated MTBF (MIL-HDBK-217 E)	> 700'000 h @ + 25 °C	
Isolation voltage	– Input/Output	1'500 VDC
Isolation capacity	– Input/Output	1200 pF typ
Isolation resistance	– Input/Output (500 VDC)	> 1'000 MOhm
Switching frequency (fixed)	all models:	330 kHz typ. (pulse width modulation)

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


General Specifications

Safety standards	UL 60950, EN 60950, IEC 6095 (Compliance up to 60 VDC input voltage(SELV limit))
Safety approvals	UL /cUL pending

Physical Specifications

Case material	Copper, Nickel plated
Baseplate material	Non conductive FR4
Potting material	Epoxy (flammability to UL 94V-0)
Weight	32g (1.09oz)
Soldering temperature	max. 260 °C / 10 sec.

Outline Dimensions mm (inches)

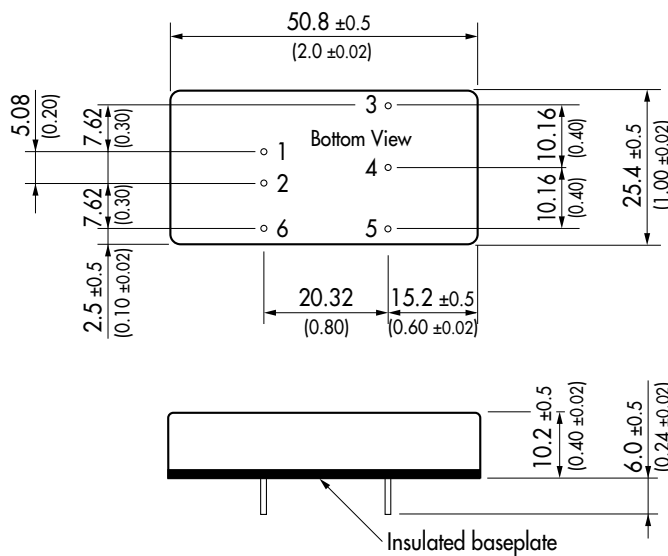

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
3	+Vout	+Vout
4	No pin	Common
5	-Vout	-Vout
6	Remote on/off	

Pin diameter \varnothing 1.0 ±0.05 (0.039 ±0.002)

Specifications can be changed without notice