


BPF-3215

Ultra Slim, 15" Fanless Panel PC, Heavy Duty Touch Screen, 12V DC Adapter

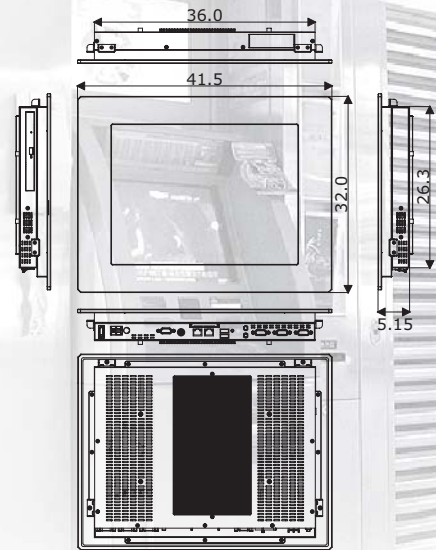

Features

- Ultra slim, fanless, aluminum front panel design
- 15" TFT color panel display
- Built-in HS-2616(M), 12V DC adapter
- Provides Intel® P-M/C-M/ULV C-M processor, heavy duty touch screen
- Onboard graphics, dual ethernet, audio with 2W stereo AMP and speaker
- 1 x 2.5" HDD space, 1 x slim CD-ROM space
- BPF-3215-V provides CF, 2 x COM, 3 x USB2.0
- Option for Wireless LAN module

System

SBC Model

HS-2616(M)

CPU

Intel® Pentium® M/Celeron® M processor 1.3~1.8GHz or ULV Intel® Celeron® M processor 600MHz/512K (option)

BIOS

AMI PnP Flash BIOS

System Chipset

Intel® 852GM(E)/ICH4

System Memory

1 x 200-pin SO-DIMM socket up to 1GB DDR SDRAM

Display Chipset

Intel® 852GM(E)

Audio Chipset

RealTek ALC202A

Ethernet Chipset

Intel® 82551QM and 82562ET dual 10/100 Mbps LAN
Provides Wireless LAN Module (option)

Drive Bay

1 x 2.5" HDD space
1 x Slim CD-ROM space

Storage

1 x Type II CF socket

Watchdog Timer

Software programmable time-out intervals from 1~255 sec. or 1~255 min.

Dimensions (LxHxW)

41.5 x 32.0 x 5.75 cm

Cut Out Size (LxH)

36.4 x 28.2 cm

Operation/Storage Temperature

0~+45 degrees C/-20~+70 degrees C

EMC

FCC/CE

Front Panel Protection

IP65 compliance

Power Adapter

12V DC in 60W adapter or +12V DC power in

Display

LCD Size

15"

Max Resolution

1024(H) x 768(V) pixels RGB strip arrangement

Brightness (cd/m²)

300 cd/m² (Center 1 points Typ.)

LCD Color

16.7M colors (6-bit with A-FRC)

Pixel Pitch (mm)

0.297 x 0.297

Touch Screen


15" resistive or SAW (option)

I/O Interface

External I/O

3 x COM, Line Out, MIC In, 2 x USB2.0, 2 x LAN, CF, PS/2 KB/MS, VGA

Rear I/O



- | | | |
|--------------------|------------------|-----------------------|
| 01. COM 1 (option) | 06. Reset Button | 11. VGA |
| 02. COM 2 | 07. USB2.0 * 2 | 12. DC Adapter In |
| 03. COM 3 | 08. LAN * 2 | 13. +12V DC In |
| 04. Line Out | 09. CF | 14. Main Power ON/OFF |
| 05. MIC In | 10. KB/MS | |

Ordering Guide

BPF-3215-V91

15" Panel PC w/TFT Panel, Resistive Touch Screen, HS-2616(w/CF), 12V DC Adapter

BPF-3215-V01

15" Panel PC w/TFT Panel, Resistive Touch Screen, HS-2616M(w/600MHz CPU, CF), 12V DC Adapter

BPF-3215-V92

15" Panel PC w/TFT Panel, SAW Touch Screen, HS-2616(w/CF), 12V DC Adapter

BPF-3215-V02

15" Panel PC w/TFT Panel, SAW Touch Screen, HS-2616M(w/600MHz CPU, CF), 12V DC Adapter

Accessory Options

Table Top Metal Stand, VESA Mount Convert-plate, CPU, Memory Module, CF Module, Wireless LAN Module, 2.5" HDD, Slim CD-ROM