


Module I/O Series



MIO-250 3 Fast Ethernet Ports

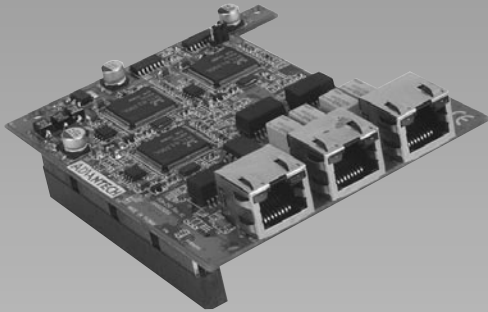

MIO-250

3 10/100 Mbps with by-pass Ethernet Ports

Features

- 3 x 10/100 Mbps Fast Ethernet
- By-Pass in Port 2 and Port 3
- MIO (Module I/O) Interface

Specifications


- **Chipset** 3 x RealTek® RTL8139
- **Speed** 10/100 Mbps
- **Interface** 3 x RJ45
- **Standard** IEEE 802.3 u (100Base-T) Compatible
- **By-Pass** Ethernet By-Pass in Port 2 and Port 3
- **Dimension** 102 x 85 mm, 4.7" x 3.3"
- **Environment** 0 ~ 60° C, operation
- **Operating Humidity** 0% ~ 90% relative humidity, non-condensing

Ordering Information

- MIO-250-00A1E

MIO-251 2 mini PCI, Audio, MDC

NEW

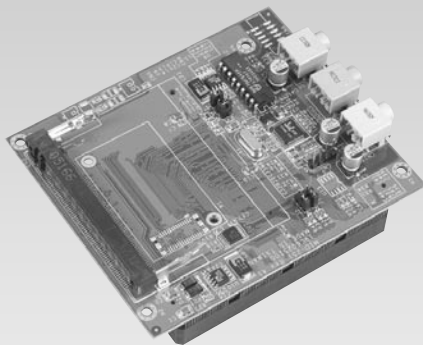

MIO-251

MIO module with 2-slot mini PCI, Audio, MDC

Features

- 2-slot mini PCI device
- 1 Audio
- 1 MDC (Mobile Daughter Card) interface (Optional)

Specifications

- **2-slot mini PCI**
- **Data Bus** 32-bit data bus
(compliant with PCI Bus Specification 2.1)
- **PCI Interface** 3.3 V interface (5 V tolerant)
- **mini PCI slot** 2 mini PCI type III A slot
- **Audio** Supports AC97 Audio stereo sound
Chipset Realtek ALC202
Audio Output Speaker-Out, Line-In, Mic-In
- **MDC (Mobile Daughter Card) Interface** Optional
- **Dimension** 102 x 85 mm, 4.7" x 3.3"
- **Environment** 0 ~ 60° C, operation
- **Operating Humidity** 10% ~ 90% relative humidity, non-condensing

Ordering Information

- MIO-251-00A1E