


Chassis Mount Power Supplies

- Universal Input (90-264V) SMPS
- Approved to UL/CSA, MITI and TUV
- Excellent Thermal Management
- Robust, Fault Tolerant Design
- Highly Reliable Design
- No overshoot during ON/OFF
- Meets IEEE587 C62.41 Test
- Withstand Voltage of 3kV (input to output)
- Withstand Voltage of 1.5kV (output to chassis ground)



Part #	Output Ratings		Efficiency Min (%)	Leakage Current (mA)	Minimum Load (A)	Cooling Method	Remote ON/OFF Control	Package Dimensions mm(inches) Typ		
	VDC	Amps						H	W	L
QVS-5E-UC	5	10.0	70	0.75	0	Convection	NO	50.8 (2.00)	124.0 (4.88)	117.3 (4.62)
QVS-5F-UC	5	20.0	70	0.75	0	Convection	YES	60.2 (2.37)	124.0 (4.88)	180.3 (7.10)
QVS-5G-UC	5	30.0	70	0.75	0	Convection	YES	60.2 (2.37)	124.0 (4.88)	218.4 (8.60)
QVS-5H-UC	5	45.0	70	0.75	0	Convection	YES	66.0 (2.60)	124.0 (4.88)	269.2 (10.60)
QVS-5J-UC	5	60.0	70	0.75	0	Convection	YES	69.9 (2.75)	124.0 (4.88)	304.8 (12.00)
QVS-12E-UC	12	5.0	70	0.75	0	Convection	NO	50.8 (2.00)	124.0 (4.88)	117.3 (4.62)
QVS-12F-UC	12	10.0	70	0.75	0	Convection	YES	60.2 (2.37)	124.0 (4.88)	180.3 (7.10)
QVS-12G-UC	12	15.0	70	0.75	0	Convection	YES	60.2 (2.37)	124.0 (4.88)	218.4 (8.60)
QVS-12H-UC	12	22.0	70	0.75	0	Convection	YES	66.0 (2.60)	124.0 (4.88)	269.2 (10.60)
QVS-12J-UC	12	30.0	70	0.75	0	Convection	YES	69.9 (2.75)	124.0 (4.88)	304.8 (12.00)
QVS-24E-UC	24	2.5	70	0.75	0	Convection	NO	50.8 (2.00)	124.0 (4.88)	117.3 (4.62)
QVS-24F-UC	24	5.0	70	0.75	0	Convection	YES	60.2 (2.37)	124.0 (4.88)	180.3 (7.10)
QVS-24G-UC	24	8.0	70	0.75	0	Convection	YES	60.2 (2.37)	124.0 (4.88)	218.4 (8.60)
QVS-24H-UC	24	12.0	70	0.75	0	Convection	YES	66.0 (2.60)	124.0 (4.88)	269.2 (10.60)
QVS-24J-UC	24	16.0	70	0.75	0	Convection	YES	69.9 (2.75)	124.0 (4.88)	304.8 (12.00)

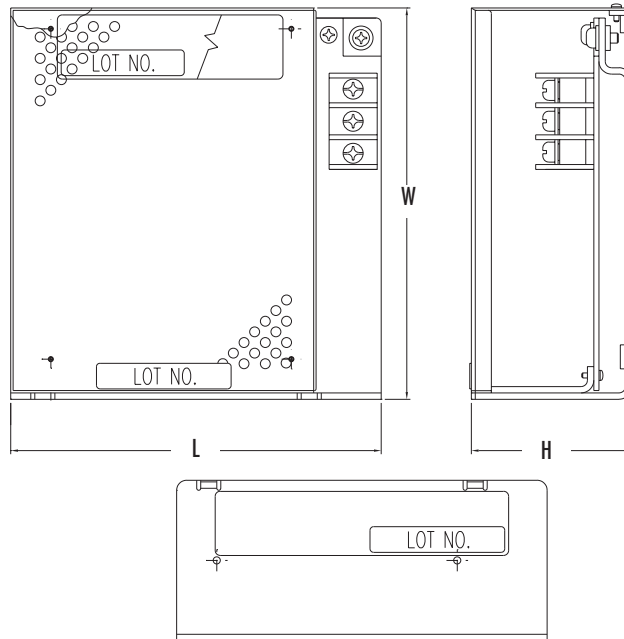

TAMURA CORPORATION

43352 Business Park Drive. | P.O. Box 892230 Temecula, CA 92589-2230 | www.tamuracorp.com

USA	Japan	United Kingdom	Hong Kong
Tel: 800-872-6624	Tel: 81 (0)3 3978-2111	Tel: 44 (0) 1380 731 700	Tel: 852-2389-4321
Fax: 909-676-9482	Fax: 81 (0)3 3923-0230	Fax: 44 (0) 1380 731 702	Fax: 852-2341-9689