


# 15 WATT AC-DC CONVERTER


**SVM-SB  
SINGLE CHANNEL**

Specifications<AC/DC>	Model				
<b>SVM**SB 15WATTS/SINGLE</b>	SVM05SB	SVM12SB	SVM15SB	SVM24SB	SVM48SB
<b>Input Characteristic</b>					
Input Voltage	AC200V				
Input Range	AC170-264V(DC220-350V)				
Input Frequency	50/60Hz				
Input Frequency Range	47-440Hz				
Phase	Single				
Inrush Current *1	12A(maximum)at AC200V				
Efficiency [%] (typical) *2	78	79	80	82	83

## DERATING CURVE

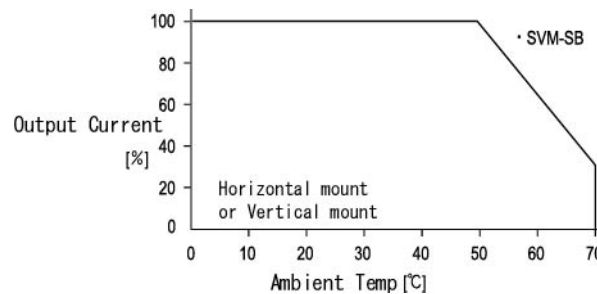

## EFFICIENCY CURVE

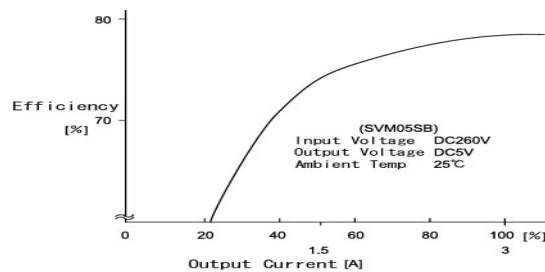


SVM05SB\_K

Specifications<AC/DC>	Model				
SVM**SB 15WATTS/SINGLE	SVM05SB	SVM12SB	SVM15SB	SVM24SB	SVM48SB
Output Voltage [V]	5	12	15	24	48
Output Current [A]	3.0	1.3	1.0	0.7	0.35
Voltage Adjust Range	+/- 10% of Rated Output Voltage(at no load within the input range)				
Ripple and Noise [mVp-p](maximum) *3	150	220	250	340	580
Regulation					
a.Statistic Line Regulation [mV](maximum)	40	96	120	192	384
b.Statistic Load Regulation [mV](maximum)	45	108	135	216	432
c.Temperature Coefficient *4	0.03%/°C				
d.Drift[mV](maximum) *5	40	75	90	135	255
e.Dynamic Load Regulation [mV](typical) *6	150	360	450	720	1440
f.Recovery Time *6	0.3mS(typical)				
Rise up time	500mS(maximum) at 25°Cand rated input/output				
Hold up time	15mS(minimum) at 25°Cand rated input/output				
Functions					
Overcurrent Protection $\geq 10\%$ of Rated Output Current[A]	Current Limiting with automatic recovery				
	3.30	1.43	1.10	0.77	0.38
Overvoltage Protection $\geq 10\%$ of Rated Output Voltage[V]	output shutdown(to reset,leave 1minute after shut-off)				
	5.50	13.2	16.50	26.4	52.8
Remote Sense	not available				
Remote On/Off	not available				
Environmental					
Operating Temperature	0 to +50°C				
Operating Humidity	85%RH(non-condensing)				
Storage Temperature	-20 to +85°C				
Storage Humidity	85%RH(non-condensing)				
Withstanding Voltage	Primary-Secondary AC2,500V for 1minute Primary-Frame Ground AC2,500V for 1minute Secondary-Frame Ground AC500V for 1minute				
Isolation Resistance	Primary-Secondary-Frame Ground 50MΩ(minimum) by DC500V insulation tester				
Vibration	5-10Hz:10mm double amplitude,10-55Hz:19.6m/s <sup>2</sup> ,20minutes' period for 60minutes each along X,Y,Z axes(non-operating)				
Shock	294m/s <sup>2</sup>				
Cooling	Convection				
Leakage Current	1mA(maximum) at 25°Crated input/output and rated input frequency				
Safety					
Weight (typical)	120g				
MTBF [H]	600,000				
Switching Frequency[kHz](typical)	140				


Conditions:

- \*1 at cold start
- \*2 at DC260V input and rated output
- \*3 measured by a bayonet probe at output connector at 0 to 100MHz bandwidth
- \*4 at 0 to +50°C
- \*5 for 7hour period after 1hour warm-up at 25°Cand rated input/output
- \*6 when output current changed from 25% to 75% of rated output current rapidly at AC200V input

## DIMENSION DIAGRAM

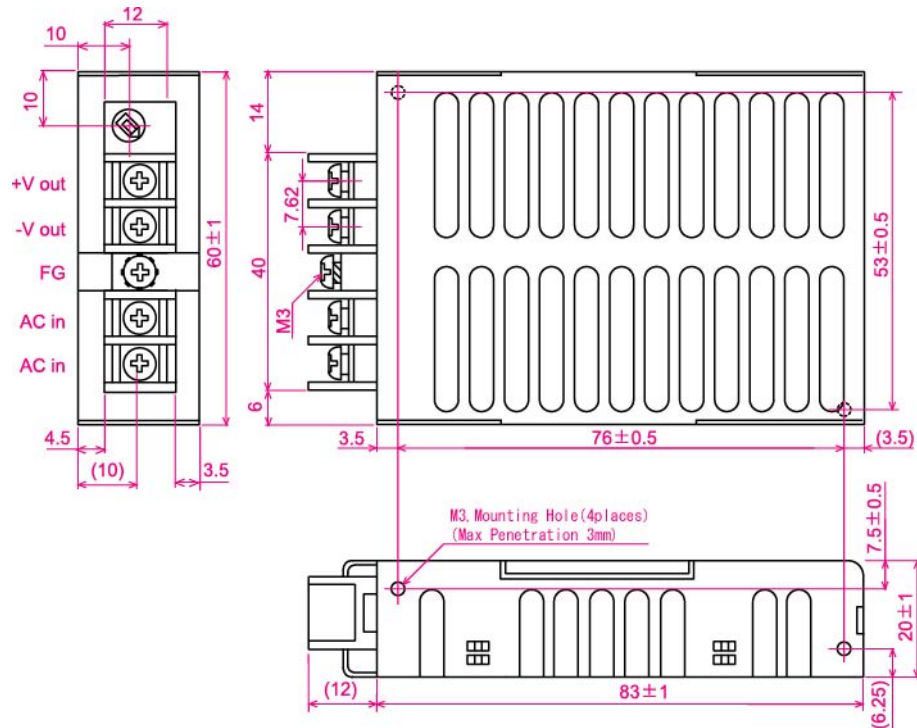

## OCP CURVE

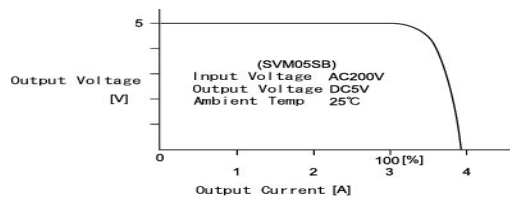

**SVM05SB**