
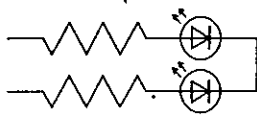
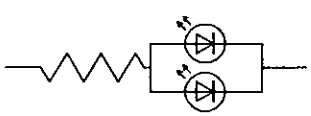
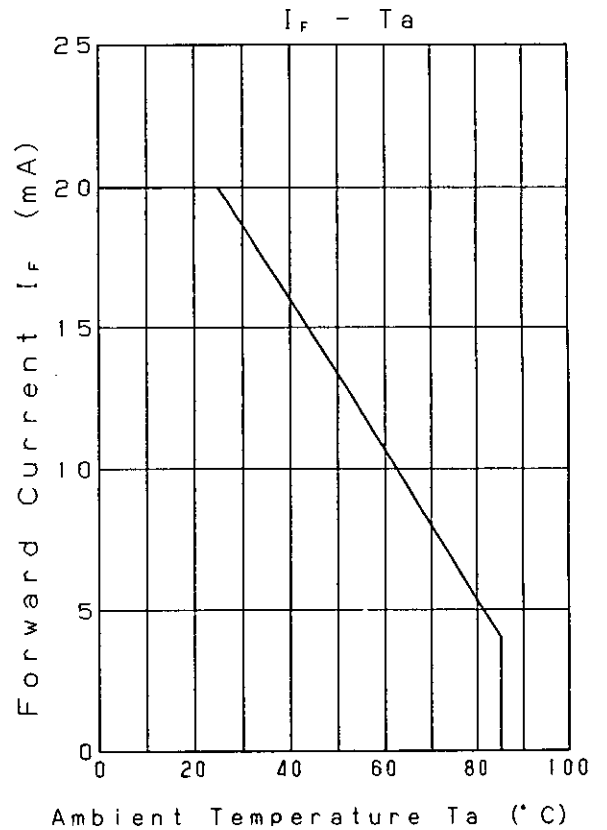
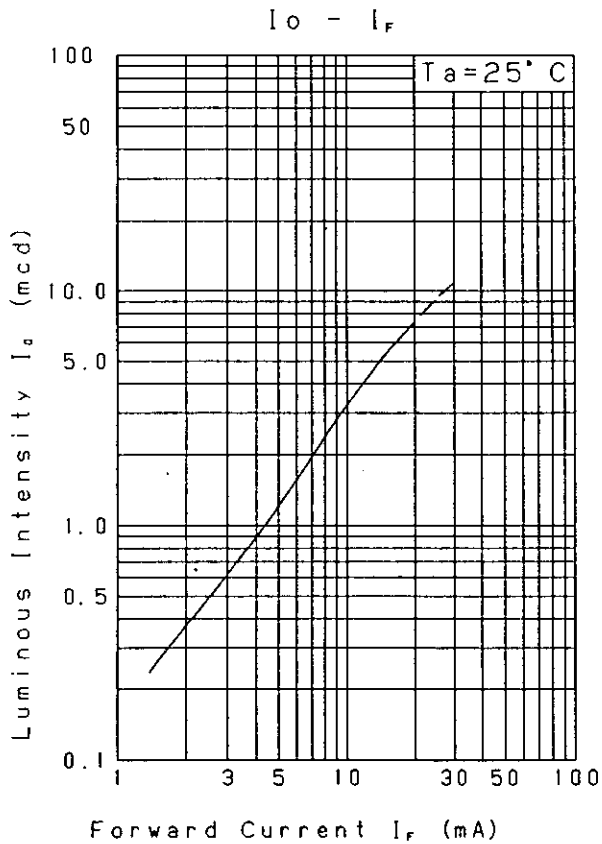
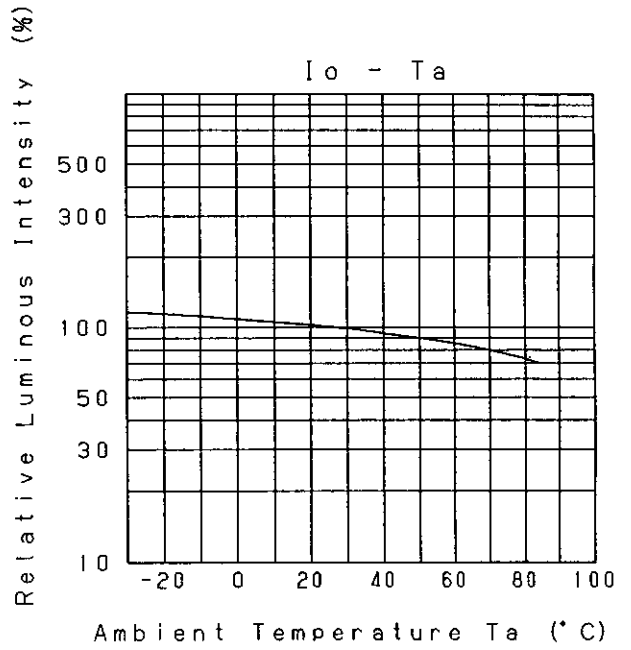


Approved	Checked	Designed	DEVELOPMENT SPECIFICATION					
		<i>T. Tabata</i>	P/N: LN J 3 1 6 C 8 4 R A				TEMPORARY	
T Y P E			Green Light Emitting Diode					
APPLICATION			Indications					
MATERIAL			GaP					
OUTLINE			Attached					
ABSOLUTE MAXIMUM RATINGS			P	*1 I _{FP}	I _{FDC}	V _R	Topr	Tstg
			60	60	20	4	-30~+85	-40~+100
			mW	mA	mA	V	°C	°C
CONDITION			Ta=25±3°C					
Test Specification								
I t e m	Symbol	C o n d i t i o n	Typ	Limit		Unit		
				Min	Max			
Forward Voltage	V _F	I _F =10mA	2.1		2.6	V		
Reverse Leakage Current	I _R	V _R =4V			10	μA		
Luminous Intensity *2	I _O	I _F =10mA DC	3.2	1.6		mcd		
Peak Emission Wavelength	λ _p	I _F =10mA DC	560			nm		
Spectral Line Half Width	Δλ	I _F =10mA DC	25			nm		
<p>*1. The Condition of I_{FP} is duty 10%, Pulse width 1ms</p> <p>*2. Tolerance of luminous intensity: ±20%.</p> <p>NOTE</p> <p>★1. Please contact the Panasonic local office if you design at low current (below 1mA DC) or pulse current operation and have any questions.</p> <p>★2. Soldering conditions...Refer to Handling note.</p> <p>★3. Compositions of the lead...Cu/Ni/Au plating</p> <p>★4. Circuit to operate LED.</p>								
								
			(A) Recommended circuit.			(B) The difference of brightness between the LED could be found due to the V _F characteristics of each LED.		
Oct. 30. 2001								

Approved	Checked	Designed	DEVELOPMENT SPECIFICATION	TEMPORARY
		T. Tabata		

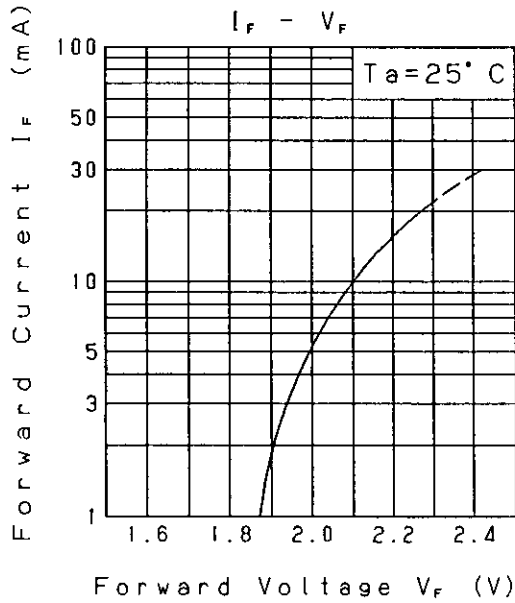

Nov. 7. 2001			
--------------	--	--	--


Approved	Checked	Designed
		T. Takata

DEVELOPMENT SPECIFICATION


P/N: LNJ316C84RA

TEMPORARY

Relative Luminous Intensity
Wavelength Characteristics




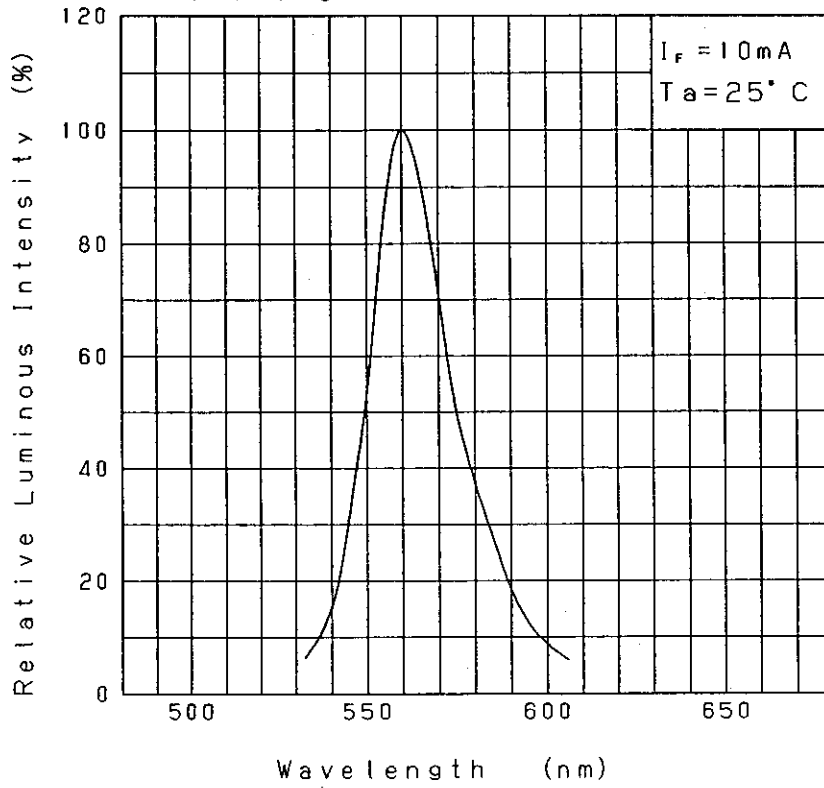


Directive Characteristics

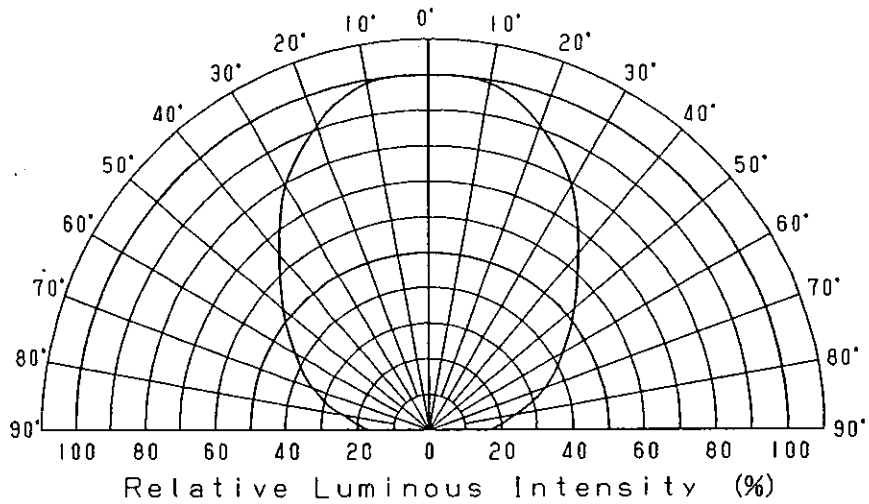

Nov. 7. 2001

Approved <i>T. Akeda</i>	Checked <i>M. Ni</i>	Designed <i>T. Taketa</i>	DEVELOPMENT SPECIFICATION (OUTLINE) P/N:	

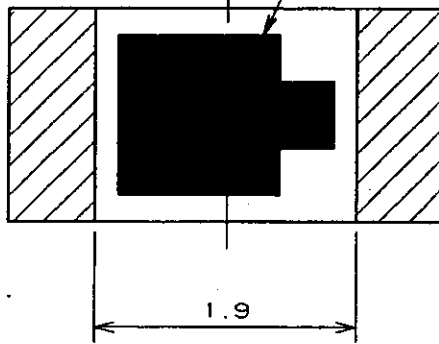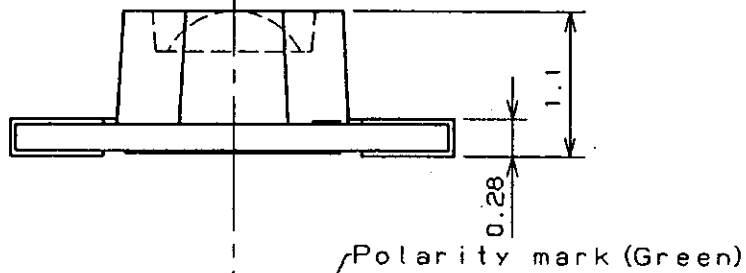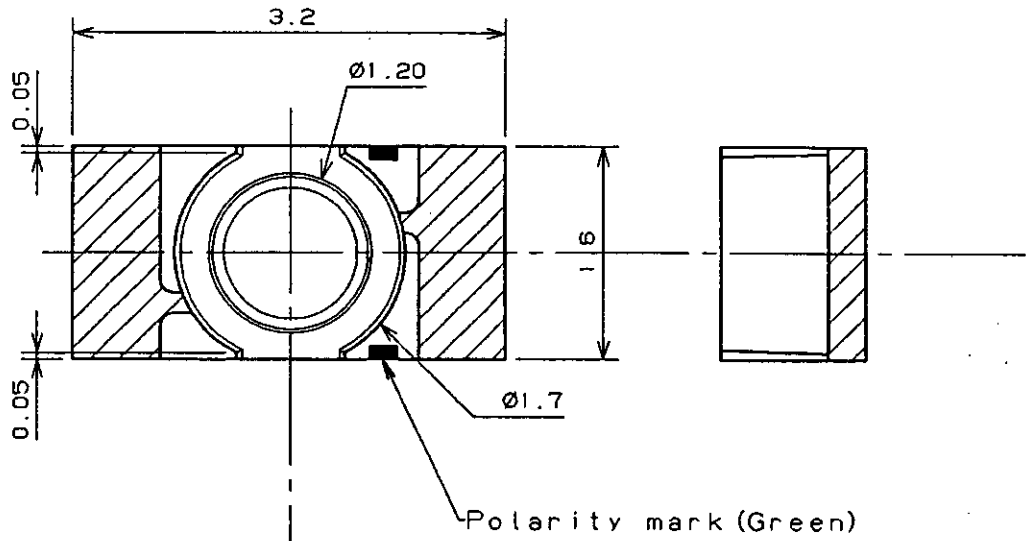

(NOTE)
 1. Unit: mm
 2. Tolerance unless specified is ± 0.15 .
 3. indicate Au terminal.

Jan. 31. 2000			
---------------	--	--	--