


# BBS-3002

High Speed, Fanless PC with VIA V4 Eden 1GHz CPU, CF, 12V DC Adapter

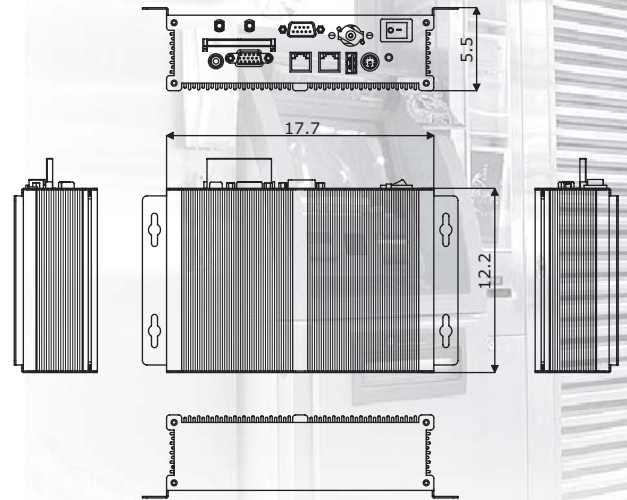

## Features

- Fanless, box PC design
- Built-in HS-2613+VIA V4 Eden 1GHz CPU, 12V DC adapter
- 1 x 2.5" HDD space
- BBS-3002-D provides CF, 1 x COM, 1 x USB2.0, TV-Out

## System

### SBC Model

HS-2613

### CPU

VIA V4 Eden 1GHz CPU

### BIOS

Award PnP Flash BIOS

### System Chipset

VIA CX700(M)

### System Memory

1 x 200-pin SO-DIMM socket up to 1GB DDR2 SDRAM

### Display Chipset

VIA CX700(M)

### Audio Chipset

VIA VT1708A

### Ethernet Chipset

Dual RealTek RTL8100C 10/100 Mbps LAN

### Drive Bay

1 x 2.5" HDD space

### Storage

1 x Type II CF socket

### Watchdog Timer

Software programmable time-out intervals from 1~255 sec. or 1~255 min.

## Mechanical

### Dimensions (LxHxW)

17.7 x 5.5 x 12.2 cm

### Operation/Storage Temperature

0~+45 degrees C/-20~+70 degrees C

### EMC

FCC/CE

### Power Adapter


12V DC in 60W adapter

## I/O Interface

### External I/O

PS/2 KB/MS, 1 x USB2.0, 2 x LAN, VGA, TV-Out, CF, 1 x COM, MIC In, Line Out

### Rear I/O

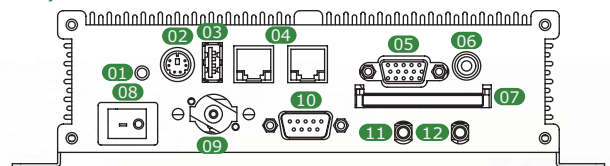

- |                  |                       |                   |
|------------------|-----------------------|-------------------|
| 01. Reset Button | 05. VGA               | 09. DC Adapter In |
| 02. KB/MS        | 06. TV-Out            | 10. COM 1         |
| 03. USB2.0       | 07. CF                | 11. MIC In        |
| 04. LAN * 2      | 08. Main Power ON/OFF | 12. Line Out      |

## Ordering Guide

### BBS-3002-D

High Speed, Fanless PC with HS-2613(w/1GHz CPU, CF), 12V DC Adapter

### Accessory Options

Memory Module, CF Module, 2.5" HDD