

Power Supply

PS/2 Type-Specification



Model No.	Rating(Max.)	Input Range(VAC)	Frequency(Hz)	DC Load Requirement												Safety
				+3.3V		+5V		+12V		-5V		-12V		6VSB		
IPS-ZKS-250AE	250W (AT)	90 ~ 135 or 180 ~ 265	47 ~ 63			25A	2.5A	10A	1A	0.5A	0A	0.5A	0A			CE, UL, TUV
IPS-ZKS-300W	300W (AT)	90 ~ 135 or 180 ~ 265	47 ~ 63			30A	3.0A	12A	1.2A	0.5A	0A	0.5A	0A			CE, UL, TUV
IPS-SP2-4400	400W (AT)	90 ~ 135 or 180 ~ 265	47 ~ 63			40A	7A	15A	2.5A	1A	0A	1A	0A			CE, UL, TUV
IPS-ZKS-250WX-B	250W (ATX)	90 ~ 135 or 180 ~ 265	47 ~ 63	14A	1A	25A	2.5A	10A	1A	0.5A	0A	0.5A	0A	1.5A	0A	CE, UL, TUV
IPS-ZKS-300WX	300W (ATX)	90 ~ 135 or 180 ~ 265	47 ~ 63	20A	2A	30A	3A	12A	1.2A	0.5A	0A	1A	0A	1.5A	0A	CE, UL, TUV
IPS-ZKS-300WX-A	300W (ATX)	90 ~ 265 (AUTO)	47 ~ 63	20A	2A	30A	3A	12A	1.2A	0.5A	0A	1A	0A	1.5A	0A	CE, UL, TUV
IPS-ZKS-400WX	400W (ATX)	90 ~ 135 or 180 ~ 265	47 ~ 63	35A	3.5A	45A	5A	15A	1.5A	1A	0A	1A	0A	3A	0A	CE, UL, TUV



PS2-AT



PS2-ATX

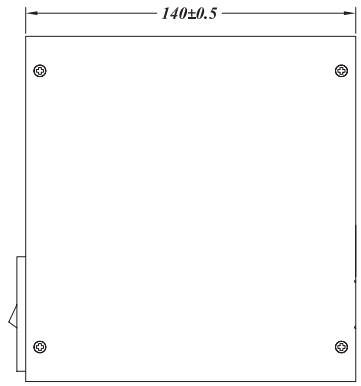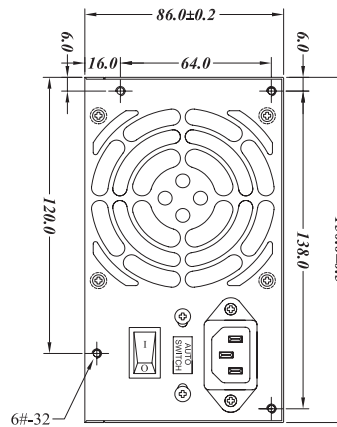

Unit:mm

Switching Power Adapter-Specification

Model No.	Rating(Max.)	Input Range(VAC)	Frequency(Hz)	DC Load Requirement						Connector	Safety		
				+3.3V		+5V		+12V				-5V	
PAD-3A-501DN12	48W	90 ~ 265 (AUTO)	47 ~ 63					4.2A	0A			A	UL, CUL, GS
PAD-STD-1205	60W	90 ~ 265 (AUTO)	47 ~ 63					5A	0A			A	UL, CUL, GS
PAD-SPD-050-D1	50W	90 ~ 265 (AUTO)	47 ~ 63			6A	0.3A	2A	0A			B	UL, CSA, TUV
PAD-PW-060A-2YD	60W	90 ~ 265 (AUTO)	47 ~ 63			7A	0.5A	3A	0A			B	UL, CSA, TUV

