

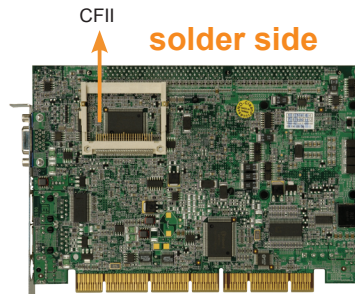


PCISA-6770E2-RS

PCISA Intel® Pentium® M / Celeron® M 400MHz FSB CPU Card with LCD/ CRT, Dual LAN, and Dual Display Dual LAN, USB2.0 and Audio

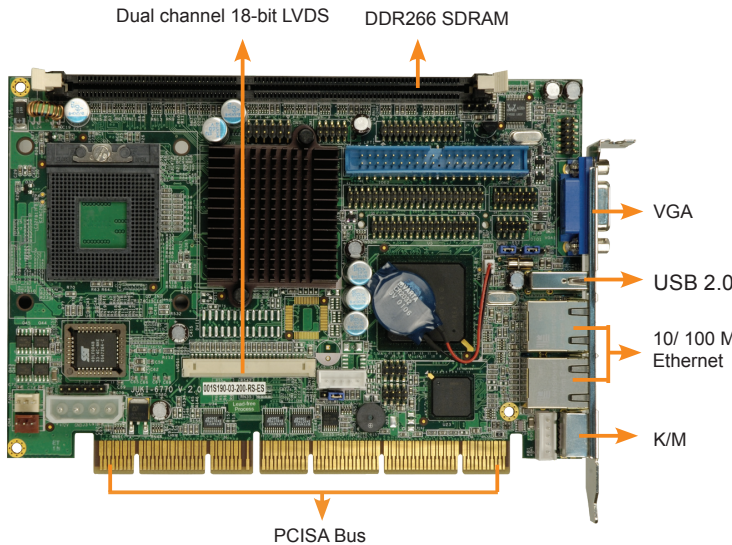

ULV Intel® Celeron M 1G/800MHz Zero Cache

Feature

1. Support Intel® Pentium® M / Celeron® M with 400MHz FSB
2. Intel® 852GM graphic integrated support dual display
3. DDR266MHz SDRAM memory support up to 1GB
4. LAN, USB2.0, Audio Integrated

Specification



- ◆ **CPU**
Socket-479 Intel® Pentium® M / Celeron® M with 400MHz FSB
Onboard Celeron® M 1GHz/800MHz zero cache
- ◆ **System Chipset**
Intel® 852GM + ICH4
- ◆ **BIOS**
AMI BIOS
- ◆ **System Memory**
1 x 184-pin DDR 266MHz up to 1GB
- ◆ **Ethernet**
2 x 10/100 Mbps Intel® 82562ET/82551ER fast Ethernet
- ◆ **I/O**
I/O Interface
1 x RS-232
1 x RS-232/422/485
1 x LPT
1 x IrDA
5 x USB 2.0
1 x FDD
2 x IDE
1 x PS/2 for keyboard/mouse
- ◆ **Digital I/O**
8 bit digital I/O, 4 input / 4 output

- ◆ **Super I/O**
W83627HG
- ◆ **Audio**
Realtek ALC655 with AC'97 codec
- ◆ **Display**
CRT integrated in Intel® 852GM
LVDS
Dual channel 18-bit LVDS with DF14-30F connector
- ◆ **SSD**
CF Type II
- ◆ **Watchdog Timer**
Software programmable supports 1~255 sec. System reset
- ◆ **Power Supply**
5V/12V, AT/ATX support
- ◆ **Power Consumption**
5V@3.5A, 12V@1.9A, (Intel® Pentium® M 1.7G/ 2M DDR266/ 512 MB RAM)
5V@2.2A, 12V@0.44A, (Celeron® M 800z, DDR266/ 512MB RAM)
- ◆ **Temperature**
operation: 0 ~ 60° C (32 ~ 140° F)
- ◆ **Humidity**
operation: 5% ~ 95% non-condensing
- ◆ **Dimension**
185mm x 127.6 mm
- ◆ **Weight**
GW: 1.0Kg

Packing List

1 x PCISA-6770E2-RS single board computer	1 x Audio cable (P/N: 19800-000044-RS)
1 x Mini jumper pack	1 x Keyboard/ PS2 mouse cable (P/N: 32000-000138-RS)
1 x ATA66/100 HDD cable (P/N: 32200-000052-RS)	1 x USB cable (P/N: CB-USB02A-RS)
1 x RS232/LPT cable (P/N: 19800-000027-RS)	1 x Utility CD
1 x RS422/ 485 cable (P/N: 32200-000077-RS)	1 x QIG

Ordering Information

Part No.	Description
PCISA-6770E2-RS-R20	PCISA Intel® Pentium® M/ Celeron® M CPU Card with LCD/ CRT VGA, Dual LAN, USB2.0 and Audio
PCISA-6770E2-RS-800Z-R20	PCISA Intel® Celeron® M 800MHz Zero Cache CPU Card with LCD/ CRT VGA, Dual LAN, USB2.0 and Audio
PCISA-6770E2-RS-1GZ-R20	PCISA Intel® Celeron® M 1GHz Zero Cache CPU Card with LCD/ CRT VGA, Dual LAN, USB2.0 and Audio
32200-000058-RS	2.0 Pitch FDD Cable