

Over 5000 VXI cards and mainframes in stock. 1000's of pieces of Test Equipment in stock.



Looking for Test Equipment?  
Visit us on the web at  
[www.recycledequipment.com](http://www.recycledequipment.com)

Recycled Equipment buys, sells, and repairs VXI cards, VXI mainframes and Test Equipment. We have tens of thousands of pieces of Electronic Test Equipment and one of the worlds largest selections of VXI cards. We have VXI cards by almost every manufacture; from Agilent to Ziatech. **Every item on our website is IN STOCK and ready to ship with in 24 hours.**

### **Sell your equipment for cash**

Recycled Equipment is interested in buying your surplus equipment! Call us today at **(410)685-1997** or email to **recycled@usimperio.com**

### **Sell your equipment on consignment**


Recycled Equipment can sell your equipment on consignment. This allows you to get retail prices for your equipment with out the hassle.

**(410)685-1997 sales@recycledequipment www.recycledequipment.com**

# Agilent E6237A VXI Pentium® Real-Time Controller (LynxOS/166 MHz)

## Data Sheet

- 2-Slot, C-size, message-based controller
- 166 MHz Intel Pentium® Processor
- LynxOS real-time operating system
- Deterministic interrupt latency of 400 μsec
- SICL/C-SCPI support
- Upgrade memory using standard SODIMMS

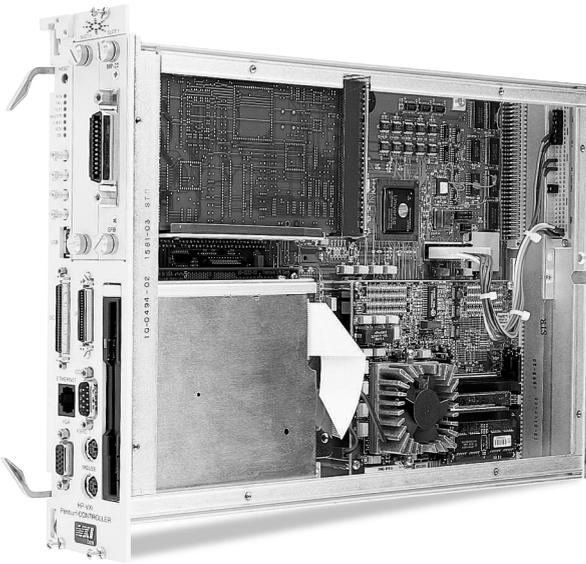

Agilent E6237A

## Description

The Agilent E6237A is a **C-size, 2-slot, message-based, real-time controller** and can be used in all Agilent C-size mainframes. Embedding the controller in the VXI chassis allows direct computer access of other VXI devices, system memory, and triggers as though they were part of the controller hardware. A separate command module is not needed.

The E6237A accesses the VXIbus with a full 32-bit wide data path (D32) for highest performance. It has one additional EXM slot for inclusion of an additional interface that can be ordered separately. For an alternative data path into and out of your VXI system, LAN connection is standard on this module.

This real-time controller supports the Agilent SICL I/O library and Agilent C-SCPI instrument command language.

This product includes a 166 MHz processor, 2.16 GB disk, 3.5" floppy drive, 32 MB RAM, SCSI-2, RS-232, GPIB, ECP parallel port, SVGA I/F with 2 MB VRAM, two PS-2 ports, and one EXM expansion slot.

Option 001 includes LynxOS PosixWorks development software and Agilent SICL/C-SCPI development software on CD-ROM and all user documentation. PosixWorks features TotalView, a multi-process debugger, and TimeScan, a performance analyzer, for optimizing your code development efficiency. Option 002 includes run-time licenses for LynxOS and Agilent software.

Refer to the Agilent Technologies Website for instrument driver availability and downloading instructions, as well as for recent product updates, if applicable.

**Note:** This product uses a notebook-style 2.5" hard drive intended for low-usage operation. Applications that require frequent (more than once per minute) disk read/writes continuously over long periods may cause premature failure of the hard disk. For these applications, you should consider using an external SCSI hard drive, either a standalone drive or a VXI disk, such as the E3249B.



**Agilent Technologies**

Innovating the HP Way

## Product Specifications

---

<b>Processor:</b>	Intel Pentium®
<b>Clock speed:</b>	166 MHz
<b>Performance</b>	
<b>MIPS:</b>	—
<b>MFLOPS:</b>	n/a
<b>SPECmark 89:</b>	—
<b>SPEC int92:</b>	4.82
<b>SPEC fp92:</b>	3.40
<b>SPEC int95_base95:</b>	4.82
<b>SPEC fp95_base95:</b>	2.68
<b>X11 Xmark 93:</b>	n/a
<b>SPECrate int92:</b>	n/a
<b>SPECrate fp92:</b>	n/a
<b>Main memory:</b>	32-128 MB
<b>Built-in interfaces:</b>	Two PS-2 ports SVGA w/2 MB Video RAM RS-232 LAN GPIB ECP Parallel SCSI-2 USB Trigger I/O Clock I/O
<b>Additional interfaces:</b>	GPIB 2-channel RS-232 Thick/thin LAN
<b>Expansion slots:</b>	1 EXM
<b>Graphics support:</b>	Color 640 x 480 800 x 600 1024 x 768 1280 x 1024
<b>Internal mass storage:</b>	2.16 GB Hard Drive 3.5-in Floppy Drive
<b>O.S. (earliest supported):</b>	LynxOS rev 2.5

---

## Environmental Specifications

<b>EMC Specifications:</b>	Meets CISPR 11, 1990/EN 55011 (1991): Group 1, Class A
<b>Shock:</b>	
<b>Operating:</b>	30 g 11 ms, half sine pulse
<b>Non-operating:</b>	50 g 11 ms, half sine pulse
<b>Vibration:</b>	
<b>Operating:</b>	2.5 g acceleration over 5-300 Hz sine wave (P-P), 1 oct/min sine sweep
<b>Non-operating:</b>	5 g acceleration over 5-300 Hz sine wave (P-P), 1 oct/min sine sweep
<b>Environmental- temperature:</b>	
<b>Operating:</b>	5 to 45 °C derated 2 °C per 1000 ft (300 m) over 6600 ft (2000 m)
<b>Non-operating:</b>	-40 to 65 °C (HDD limits)
<b>Environmental-max. altitude:</b>	
<b>Operating:</b>	10,000 ft (3,000 m)
<b>Non-operating:</b>	40,000 ft (12,000 m)
<b>Environmental-rel. humidity:</b>	
<b>Operating:</b>	8-90% non-condensing
<b>Non-operating:</b>	5-95% non-condensing

---

### VXI Characteristics

VXI device type:	Message-based controller
Size:	C
Slots:	2
Connectors:	P1/2
Shared memory:	n/a
VXI busses:	TTL Trigger Bus, ECL Trigger Bus
C-size compatibility:	n/a

---

### Module Current

	$I_{PM}$	$I_{DM}$
+5 V:	11 A	0.02 A
+12 V:	40.2 mA	0.01 A
-12 V:	2.4 mA	0.01 A
+24 V:	0	0
-24 V:	0	0
-5.2 V:	335 mA	0.001 A
-2 V:	120 mA	0.006 A

---

### Cooling/Slot

Watts/slot:	29
$\Delta P$ mm H <sub>2</sub> O:	0.14
Air flow liter/s:	5.6

---

### Ordering Information

Description	Product No.
VXI Pentium® Real-Time Controller*	E6237A*
Pentium Controller w/Development S/W	E6237A 001
Pentium Controller w/Run-time Software	E6237A 002
3 yrs. Return to Agilent to 1 yr. OnSite Warr.	E6237A W01
5 yrs. of Customer Return Repair Service	E6237A W50
16 Mbytes Additional RAM	E6245A
32 Mbytes Additional RAM	E6246A
Additional AU/ThinLAN/10baseT Interface	RADIS-00724
Add'l 8-Channel RS-232 Interface	RADIS-00820
Additional GPIB Interface	RADIS-00848
Additional 2-Channel RS-232 Interface	RADIS-00849

**\*Note: You must specify either Opt. 001 or Opt. 002 when ordering.**

## Related Literature

*2000 Test System and VXI Catalog CD-ROM*,  
Agilent Pub. No. 5980-0308E (detailed specifications for VXI products)

*2000 Test System and VXI Catalog*,  
Agilent Pub. No. 5980-0307E (overview of VXI products )

*1998 Test System and VXI Products Data Book*,  
Agilent Pub. No. 5966-2812E

## Online

Internet access for Agilent product information, services and support  
[www.agilent.com/find/tmdir](http://www.agilent.com/find/tmdir)

VXI product information  
[www.agilent.com/find/vxi](http://www.agilent.com/find/vxi)

Defense Electronics Applications  
[www.agilent.com/find/defense\\_ATE](http://www.agilent.com/find/defense_ATE)

Agilent Technologies VXI Channel Partners  
[www.agilent.com/find/vxichanpart](http://www.agilent.com/find/vxichanpart)

Agilent Technologies' HP VEE Application Website  
[www.agilent.com/find/vee](http://www.agilent.com/find/vee)

Agilent Technologies Data Acquisition and Control Website  
[www.agilent.com/find/data\\_acq](http://www.agilent.com/find/data_acq)

Agilent Technologies Instrument Driver Downloads  
[www.agilent.com/find/inst\\_drivers](http://www.agilent.com/find/inst_drivers)

Agilent Technologies Electronics Manufacturing Test Solutions  
[www.agilent.com/go/manufacturing](http://www.agilent.com/go/manufacturing)

**Get assistance with all your test and measurement needs at**  
[www.agilent.com/find/assist](http://www.agilent.com/find/assist)  
**or check your local phone book for the Agilent office**  
**near you.**

## Agilent Technologies' test and measurement service/support commitment

Agilent strives to maximize the value our test and measurement products give you, while minimizing your risk and service/support problems. We work to ensure that each product is realistically described in the literature, meets its stated performance and functionality, has a clearly stated global warranty, and is supported at least five years beyond its production life. Our extensive self-help tools include many online resources ([www.agilent.com](http://www.agilent.com)).

Experienced Agilent test engineers throughout the world offer practical recommendations for product evaluation and selection. After you purchase an Agilent product, they can provide no-charge assistance with operation verification and basic measurement setups for advertised capabilities. To enhance the features, performance, and flexibility of your test and measurement products—and to help you solve application challenges—Agilent offers free or extra-cost product options and upgrades, and sell expert engineering, calibration, and other consulting services.

### Phone and fax

United States:  
Agilent Technologies  
(tel) 1 800 452 4844

Canada:  
Agilent Technologies Canada Inc.  
(tel) 1 877 894 4414

Europe:  
Agilent Technologies  
Test & Measurement  
European Marketing Organisation  
(tel) (31 20) 547 2000

Japan:  
Agilent Technologies Japan Ltd.  
(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

Latin America:  
Agilent Technologies  
Latin American Region Headquarters, U.S.A.  
(tel) (305) 267 4245  
(fax) (305) 267 4286

Australia/New Zealand:  
Agilent Technologies Australia Pty Ltd.  
(tel) 1 800 629 485 (Australia)  
(fax) (61 3) 9272 0749  
(tel) 0 800 738 378 (New Zealand)  
(fax) (64 4) 802 6881

Asia Pacific:  
Agilent Technologies, Hong Kong  
(tel) (852) 3197-7777  
(fax) (852) 2506-9284

Data Subject to Change  
© Agilent Technologies 2000  
Printed in the U.S.A. 04/2000  
Publication No.: 5965-8821E



**Agilent Technologies**

Innovating the HP Way