


# AHP-1081

8.4" SVGA HMI Touch Panel Computer With Onboard Intel® Atom™ N270 1.6 GHz Processor

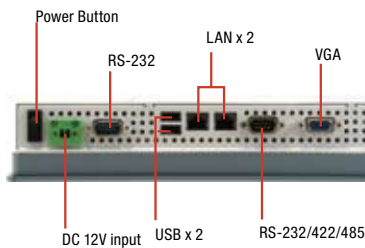

## Features

- Intel® Atom™ N270 1.6 GHz Onboard
- 8.4" 450 Nits SVGA LED Backlight
- Fanless Operation
- IP-65 Front Bezel
- Slim Design: 50 mm
- WiFi (Optional)




## Specifications

System	
Processor	Intel® Atom™ N270, 1.6 GHz
System Memory	DDR2 SODIMM, up to 2GB
LCD/CRT Controller	Integrated graphics in Intel® 945GSE
Ethernet	10/100/1000Base-TX, RJ-45 x 2
I/O Port	USB2.0 x 2, RS-232 x 1, RS-232/422/485 x 1, LAN x 2, VGA x 1
Storage Disk Drive	2.5" SATA Hard Disk Drive /CompactFlash™ Slot (Internal)
Expansion Slot	Mini-PCI x 1
OS support	WinCE 6.0, Windows® XP Embedded, Windows® XP, Windows® 7, Windows® Embedded Standard 7, Linux Fedora
Mechanical	
Construction	IP-65 certified Plastic front panel, Aluminum back panel
Color	Front Panel: Gray, Back panel: Light Gray
Mounting	VESA 75/ Panel
Dimension	9.65" x 7.2" x 1.97" (245mm x 183mm x50mm)
Gross Weight	4.4 lb (2 Kg)
Net Weight	3.3 lb (1.5 Kg)
Environmental	
Operating Temperature	32°F ~ 122°F (0°C ~ 50°C)
Storage Temperature	-4°F ~ 158°F (-20°C ~ 70°C)
Storage Humidity	5%~90% @40°C, non-condensing
Vibration	1 g rms/ 5~ 500Hz/ operation – With HDD
Shock	20 G peak acceleration (11 msec. duration)
EMC	CE/FCC class A
Power Supply	
DC input	DC 12V w/ 2-pin terminal block
LCD	
Display Type	8.4" TFT-LCD
Max Resolution	800 x 600
Max. Colors	262K
Luminance	450 cd/m²
Viewing Angle	160°(H), 140°(V)
Back Light	LED
Back Light MTBF (hours)	50,000
Touchscreen	
Type	5-wire, Analog Resistive
Resolution	2048 x 2048
Light Transmission	>80%
Life time	35 Million activations

# AHP-1081

## Dimension

Unit: mm

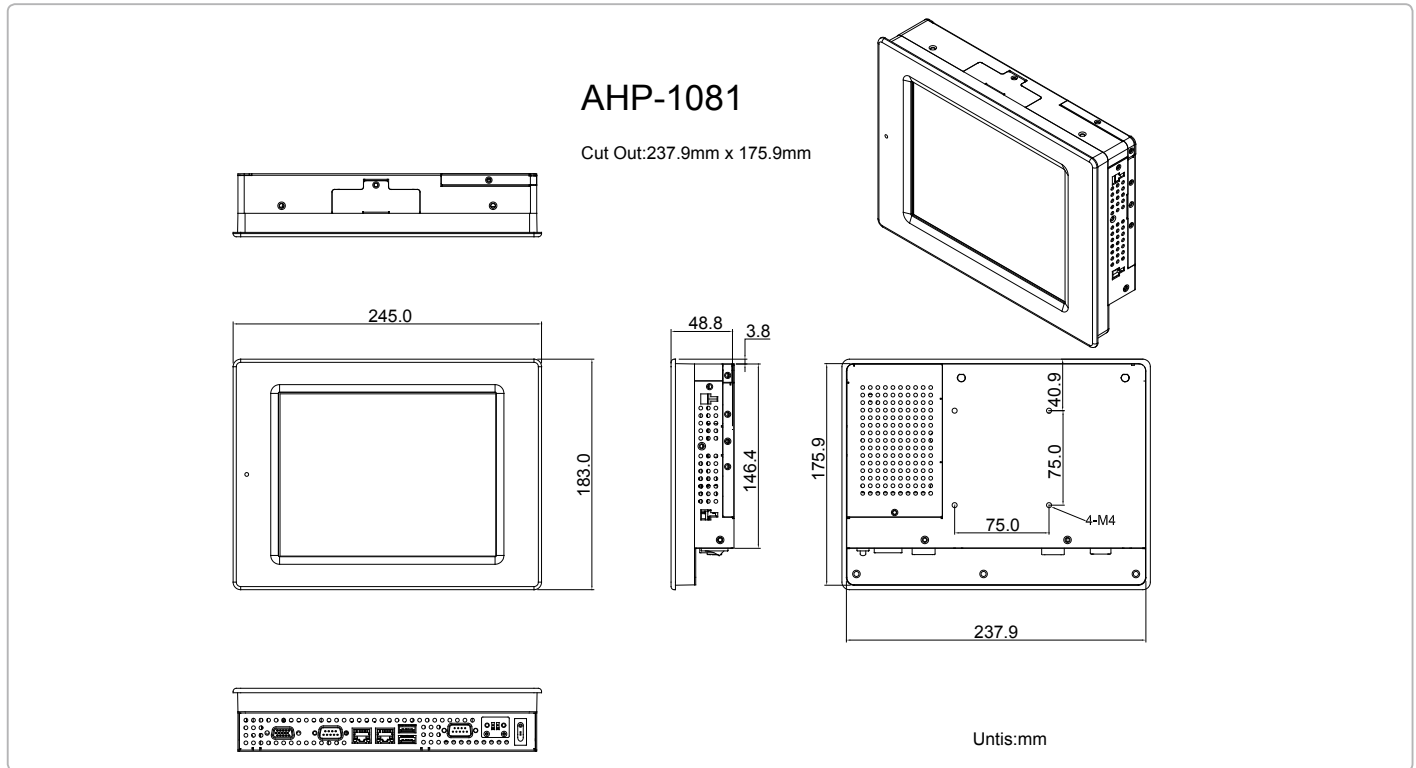

## Ordering Information

Part Number	Display Type	Max Resolution	Luminance	View Angle	Backlight MTBF (Hours)	CPU	LAN	USB	RS-232	RS-485/422/232	Storage	RAM	Display	Expansion	Mounting	Power	Temp.	Touch
TF-AHP-1081HTT-A1-1011	8.4" TFT-LCD	800 x 600	450 cd/m <sup>2</sup>	160(H), 140(V)	50,000	Intel® Atom™ N270 - 1.66GHz	2	2	1	1	CF Kit x 1 SATA-HDD Kit x 1	1G Included	VGA x 1	Mini PCI x 1	VESA 75 / Panel	DC12V	0°C - 50°C (w/o air)	5-wire resistive

## Packing List

- Phoenix Power Connector
- Mounting Brackets and Screws
- CD-ROM for Manual (in PDF Format) and Drivers
- AHP-1081

## Optional Accessories

- **ARM-DR075-0**  
DIN Rail Kit with VESA 75mm Standards
- **ARM-WK075-0**  
Wallmount Kit for VESA 75/100mm Standard Screw Holes
- **1757904005**  
12V 40W Power Adapter w/ 2-pin Terminal Block
- **1702031802**  
Power Cord (US Type)
- **1702031803**  
Power Cord (European Type)
- **9761215303**  
Wireless Module b/g/n