
CYCLOPS-D Series



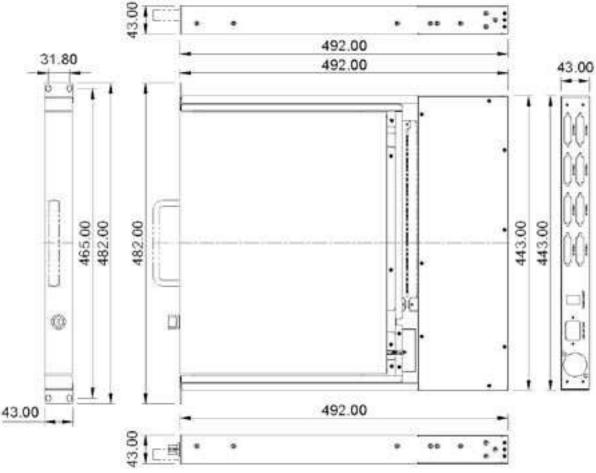

Construction

SECC with Ni Coating

Color

Black or metallic blue

Panel

15"/17" LCD with 250 nit brightness, 16.7 million display colors with maximum resolution (XGA) 1024 x 768

KVM Switch

Ports access trough front panel switch, hotkey and OSD control. DB25 Ports access trough front panel switch, hotkey and OSD control. DB25 pin type female connectors for 8 platform connection (VGA, PS/2 keyboard and PS/2 mouse male connectors at the platform side). Cascading up to 512 systems.

Keyboard and Mouse

PS/2 106 key industrial keyboard and touch pad or optional Cherry keyboard with trackball

On Screen Control

Menu, Auto adjustment, brightness, contrast, phase, H-V position, pitch, zoom, color, language and OSD position Automatic and Manual Scan mode.

Security Lock

Front access lock for system security.

Drawer Design

Special slider for smooth extraction and wrist pad for trackball version

Dimensions

443(W) x 492(D) x 43(H) mm / 17.5" x 19.43" x 1.7" "

Operating Temperatures

0~45 ℃

Gross Weight

16.5 kg

2L-1601P

Ordering Information

CYCLOPS-D158	1U 8 Port KVM switch, 15"LCD, indus-
	trial slim keyboard, touchpad, and one

2L-1601P.

CYCLOPS-D178 1U 8 Port KVM switch, 17"LCD, indus-

trial slim keyboard, touchpad, and one

2L-1601P.

CYCLOPS-D158C 1U 8 Port KVM switch, 15"LCD, Cherry keyboard, trackball, and one 2L-1601P.

1U 8 Port KVM switch, 17"LCD, Cherry

CYCLOPS-D178C keyboard, trackball, and one 2L-1601P.

KVM cable 1.8 M, PS/2 for CYCLOPS D

series .

2L-1603P KVM cable 3.0 M, PS/2 for CYCLOPS D

series .