





ETX-735E

Wide Range Operating Temperature Intel® Atom™ N270 ETX® CPU Module

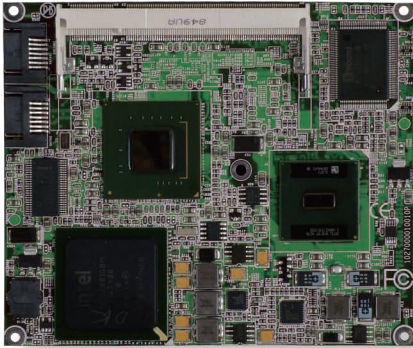

ETX

Features

- Fanless Design
- Soldered Onboard Intel® Atom™ N270 1.6GHz Processor
- Dual Channels 18-bit LVDS, and Analog RGB
- Multi-expansion (2 x SATA on CPU Module, 1 x PATA, 6 x USB, 2 x Serial Ports, 4 x PCI Masters, ISA Bus, and SDVO B Output Connector)
- Wide Range Operating Temp.: -40 ~ 85°C

System

CPU	Intel® Atom™ N270 1.6GHz CPU with 533MHz FSB
Memory	1 x 200-pin DDR2 SO-DIMM Socket supporting 400/533MHz SDRAM up to 2GB
Chipset	Intel® 945GSE + ICH7M
BIOS	Phoenix-Award PnP Flash BIOS
Storage	1 x Ultra ATA, support 2 IDE devices 2 x Serial ATA ports with 150MB/s HDD transfer rate
Watchdog Timer	1~255 levels reset

I/O

I/O Chip	Winbond W83627HG
Serial Port	2 x COM ports (1 x RS-232, 1 x RS-232/422/485 selectable via PBE-1000)
Parallel Port	SPP/EPP/ECP mode
Floppy	1 x Floppy disk drive shared with parallel port
USB Port	4 x USB 2.0 ports
KB/MS	PS/2 interface for Keyboard and Mouse (via PBE-1000)
Expansion Bus	PCI (4 x PCI Masters) and ISA bus

Ethernet

Chipset	1 x Intel® 82562ET PCI 10/100Base-T Ethernet controller
----------------	---

Audio

CODEC/Interface	Realtek ALC655 6 Channel AC97 Audio CODEC, Mic-in/Line-in/Line-out
------------------------	--

Display


Graphics Chipset	Integrated Intel® Graphics Media Accelerator 950
Graphics Interface	Analog RGB support up to 2048 x 1536 LCD: Dual Channels 18-bit LVDS Intel® compliant SDVO port (serial DVO) 200 megapixel/sec, supports external DVI, TV and LVDS transmitter (via customized carrier board or daughterboard)

SDVO Interface

Mechanical & Environmental

Power Consumption	2.61A/4.94V, 0.01A/3.3V, 0.09A/12.18V
Operating Temp.	-40 ~ 85°C (-40 ~ 185°F)
Operating Humidity	0 ~ 90% (non-condensing)
Dimension (L x W)	114 x 95 mm (4.5" x 3.7")

Dimensions

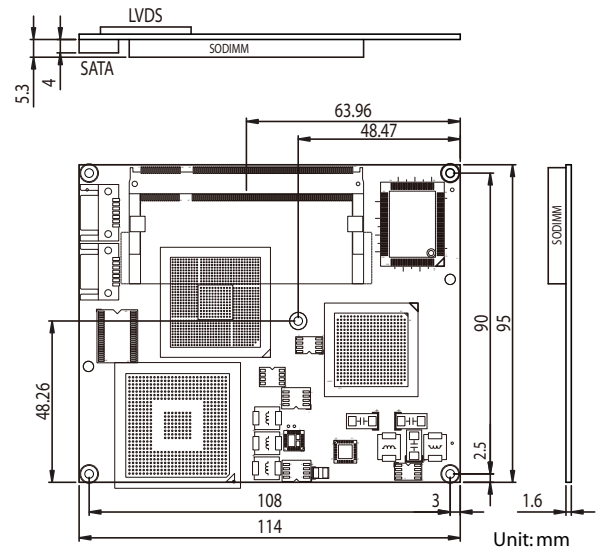

Ordering Information

ETX-735E	Intel® Atom™ N270 1.6GHz ETX® CPU module
HS-2700-W1	Heatsink wave type (114 x 95 x 16 mm)
HS-0735-F1	Heat spreader (dimensions TBD)
PBE-1000 R2.1	ETX® evaluation board in ATX form factor Page 1-20
CBK-05-1000-00	Cable kit for PBE-1000 R2.1
	1 x FDD cable 3 x COM port cables 1 x USB cable 2 x IDE cables 1 x TV-out cable

All specifications are subject to change without notice.