

# 50-200 Watts

## ICH/IFH Series



- 2:1 & 4:1 Input Ranges
- Efficiency up to 90%
- Single Output
- -40 °C to +100 °C Operating Temperature
- Continuous Short Circuit Protection
- Five-sided Metal Case
- 3 Year Warranty

### Specification

#### Input

- |                                  |                                                                                                                                                                                                                                                  |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Input Voltage Range              | • See tables                                                                                                                                                                                                                                     |
| Input Current (no load)          | • See tables                                                                                                                                                                                                                                     |
| Input Reverse Voltage Protection | • None                                                                                                                                                                                                                                           |
| Input Filter                     | • Pi network                                                                                                                                                                                                                                     |
| Undervoltage Lockout             | • 2:1 Input Models:<br>12 Vin, power up 8.8 V, down 8.0 V<br>24 Vin, power up 17.0 V, down 16.0 V<br>48 Vin, power up 34.0 V, down 32.5 V<br><br>4:1 Input Models:<br>24 Vin, power up 8.8 V, down 8.0 V<br>48 Vin, power up 17.0 V, down 16.0 V |

#### Output

- |                          |                                                                                                                                                                                                                                                              |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Output Voltage Trim      | • $\pm 10\%$                                                                                                                                                                                                                                                 |
| Initial Set Accuracy     | • $\pm 1\%$ max (ICH100: $\pm 1.5\%$ )                                                                                                                                                                                                                       |
| Line Regulation          | • $\pm 0.2\%$ max measured from high line to low line                                                                                                                                                                                                        |
| Load Regulation          | • $\pm 0.2\%$ max measured from 0-100% load                                                                                                                                                                                                                  |
| Transient Response       | • 5% max deviation, recovery to within 1% in 500 $\mu$ s, 25% step load change                                                                                                                                                                               |
| Ripple & Noise           | • 2.5, 3.3 & 5 V models: 100 mV pk-pk<br>12 & 15 V models: 150 mV pk-pk<br>24, 28 & 48 V models: 1% max pk-pk<br>ICH50/75 - 2.5 V, 3.3 V, 5 V models: 75mV<br>12 V, 15 V models: 100 mV<br>20 MHz bandwidth (see note 3)                                     |
| Overvoltage Protection   | • 115-140%                                                                                                                                                                                                                                                   |
| Short Circuit Protection | • ICH50/75/100W/IFH200-: Trip & restart (hiccup mode) with auto recovery<br>ICH50W/75W/100/150 & IFH200: Current limit, auto recovery                                                                                                                        |
| Temperature Coefficient  | • $\pm 0.03\%/^{\circ}\text{C}$                                                                                                                                                                                                                              |
| Current Limit            | • IFH200: 110-150% nominal output, all other models: 110-160% nominal output                                                                                                                                                                                 |
| Remote On/Off            | • See note 1 & 2                                                                                                                                                                                                                                             |
| Thermal Shutdown         | • ICH50/50W/75/75W/100/150:<br>Thermal shutdown when case temperature reaches 100 °C, auto recovery when case temperature < +60 °C<br>ICH100W/IFH200:<br>Thermal shutdown when case temperature reaches 105 °C, auto recovery when case temperature < +90 °C |

#### General

- |                      |                                                                                                                                                                                                            |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Efficiency           | • See tables                                                                                                                                                                                               |
| Isolation Voltage    | • 1500 VDC Input to Output<br>1500 VDC Input to Case<br>1500 VDC Output to Case                                                                                                                            |
| Isolation Resistance | • 10 <sup>7</sup> $\Omega$ min                                                                                                                                                                             |
| Switching Frequency  | • ICH50/75 12-24V models: 400 kHz typical<br>ICH50/75 48 V models: 300 kHz typical<br>ICH50W/75W: 300 kHz typical<br>ICH100/ICH150: 500 kHz typical<br>ICH100W: 250 kHz typical<br>IFH200: 350 kHz typical |
| Power Density        | • ICH50: 18.3 W/in <sup>3</sup><br>ICH75: 27.4 W/in <sup>3</sup><br>ICH100: 36.6 W/in <sup>3</sup><br>ICH150: 54.8 W/in <sup>3</sup><br>IFH200: 34.8 W/in <sup>3</sup>                                     |
| MTBF                 | • $\geq 790$ kWhrs to MIL-HDBK-217F at 25 °C, GB                                                                                                                                                           |

#### Environmental

- |                            |                                                                                          |
|----------------------------|------------------------------------------------------------------------------------------|
| Operating Case Temperature | • -40 °C to +100 °C, see derating curve                                                  |
| Storage Temperature        | • ICH50/75: -55 °C to +105 °C<br>ICH100/150 & IFH200: -40 °C to +105 °C                  |
| Shock                      | • 30 g pk, half sine wave for 18 ms, 3 pulses per face, all 6 faces tested on all 3 axes |
| Vibration                  | • 5-500 Hz at 3 g, 10 mins per axis                                                      |

#### EMC & Safety

- |                    |                                                       |
|--------------------|-------------------------------------------------------|
| Emissions          | • EN55022, level A conducted with external components |
| ESD Immunity       | • EN61000-4-2, level 2 Perf Criteria A                |
| EFT/Burst          | • EN61000-4-4, level 1, Perf Criteria A               |
| Surge              | • EN61000-4-5, installation class 1, Perf Criteria A  |
| Conducted Immunity | • EN61000-4-6, 3 V rms Perf Criteria A                |
| Magnetic Field     | • EN61000-4-8, 1 A/m, Perf Criteria A                 |
| Safety Approvals   | • UL60950-1 (ICH100W not UL approved)                 |

# Models and Ratings

# ICH/IFH Series

DC-DC

Input Voltage	Output Voltage	Output Current	Input Current <sup>(4)</sup>		Efficiency	Model Number <sup>(2,5)</sup>
			No Load	Full Load		
9-18 VDC (12 V nominal)	2.5 V	10.00 A	50 mA	2740 mA	76%	ICH5012S2V5
	3.3 V	10.00 A	50 mA	3525 mA	78%	ICH5012S3V3
	5.0 V	10.00 A	50 mA	5145 mA	81%	ICH5012S05
	12.0 V	4.16 A	50 mA	4950 mA	84%	ICH5012S12
	15.0 V	3.33 A	50 mA	4950 mA	84%	ICH5012S15
	24.0 V	2.08 A	50 mA	4950 mA	84%	ICH5012S24
18-36 VDC (24 V nominal)	2.5 V	10.00 A	50 mA	1353 mA	77%	ICH5024S2V5
	3.3 V	10.00 A	50 mA	1740 mA	79%	ICH5024S3V3
	5.0 V	10.00 A	50 mA	2540 mA	82%	ICH5024S05
	12.0 V	4.16 A	50 mA	2450 mA	85%	ICH5024S12
	15.0 V	3.33 A	50 mA	2450 mA	85%	ICH5024S15
	24.0 V	2.08 A	50 mA	2419 mA	86%	ICH5024S24
36-75 VDC (48 V nominal)	2.5 V	10.00 A	50 mA	676 mA	77%	ICH5048S2V5
	3.3 V	10.00 A	50 mA	870 mA	79%	ICH5048S3V3
	5.0 V	10.00 A	50 mA	1250 mA	83%	ICH5048S05
	12.0 V	4.16 A	50 mA	1220 mA	85%	ICH5048S12
	15.0 V	3.33 A	50 mA	1220 mA	85%	ICH5048S15
	24.0 V	2.08 A	50 mA	1209 mA	86%	ICH5048S24

Input Voltage	Output Voltage	Output Current	Input Current <sup>(4)</sup>		Efficiency	Model Number <sup>(2)</sup>
			No Load	Full Load		
9-36 VDC (24 V nominal)	3.3 V	10.00 A	50 mA	1785 mA	77%	ICH5024WS3V3
	5.0 V	10.00 A	50 mA	2570 mA	81%	ICH5024WS05†^
	12.0 V	4.16 A	50 mA	2510 mA	83%	ICH5024WS12
	15.0 V	3.33 A	50 mA	2510 mA	83%	ICH5024WS15
	24.0 V	2.08 A	50 mA	2510 mA	83%	ICH5024WS24†^
18-75 VDC (48 V nominal)	3.3 V	10.00 A	50 mA	880 mA	78%	ICH5048WS3V3
	5.0 V	10.00 A	50 mA	1270 mA	82%	ICH5048WS05
	12.0 V	4.16 A	50 mA	1240 mA	84%	ICH5048WS12
	15.0 V	3.33 A	50 mA	1240 mA	84%	ICH5048WS15
	24.0 V	2.08 A	50 mA	1240 mA	84%	ICH5048WS24

Input Voltage	Output Voltage	Output Current	Input Current <sup>(4)</sup>		Efficiency	Model Number <sup>(2,5)</sup>
			No Load	Full Load		
9-18 VDC (12 V nominal)	2.5 V	15.00 A	50 mA	4110 mA	76%	ICH7512S2V5
	3.3 V	15.00 A	50 mA	5290 mA	78%	ICH7512S3V3
	5.0 V	15.00 A	50 mA	7715 mA	81%	ICH7512S05
	12.0 V	6.25 A	50 mA	7440 mA	84%	ICH7512S12
	15.0 V	5.00 A	50 mA	7440 mA	84%	ICH7512S15
	24.0 V	3.13 A	50 mA	7440 mA	84%	ICH7512S24
18-36 VDC (24 V nominal)	2.5 V	15.00 A	50 mA	2029 mA	77%	ICH7524S2V5
	3.3 V	15.00 A	50 mA	2610 mA	79%	ICH7524S3V3
	5.0 V	15.00 A	50 mA	3810 mA	82%	ICH7524S05†^
	12.0 V	6.25 A	50 mA	3675 mA	85%	ICH7524S12
	15.0 V	5.00 A	50 mA	3675 mA	85%	ICH7524S15
	24.0 V	3.13 A	50 mA	3640 mA	86%	ICH7524S24
36-75 VDC (48 V nominal)	2.5 V	15.00 A	50 mA	1015 mA	77%	ICH7548S2V5
	3.3 V	15.00 A	50 mA	1305 mA	79%	ICH7548S3V3
	5.0 V	15.00 A	50 mA	1883 mA	83%	ICH7548S05
	12.0 V	6.25 A	50 mA	1838 mA	85%	ICH7548S12
	15.0 V	5.00 A	50 mA	1838 mA	85%	ICH7548S15
	24.0 V	3.13 A	50 mA	1820 mA	86%	ICH7548S24

Input Voltage	Output Voltage	Output Current	Input Current <sup>(4)</sup>		Efficiency	Model Number <sup>(2)</sup>
			No Load	Full Load		
9-36 VDC (24 V nominal)	3.3 V	15.00 A	50 mA	2611 mA	79%	ICH7524WS3V3
	5.0 V	15.00 A	50 mA	3811 mA	82%	ICH7524WS05
	12.0 V	6.25 A	50 mA	3765 mA	83%	ICH7524WS12
	15.0 V	5.00 A	50 mA	3720 mA	84%	ICH7524WS15
	24.0 V	3.12 A	50 mA	3720 mA	84%	ICH7524WS24
18-75 VDC (24 V nominal)	3.3 V	15.00 A	50 mA	1289 mA	80%	ICH7548WS3V3
	5.0 V	15.00 A	50 mA	1883 mA	83%	ICH7548WS05
	12.0 V	6.25 A	50 mA	1860 mA	84%	ICH7548WS12
	15.0 V	5.00 A	50 mA	1838 mA	85%	ICH7548WS15
	24.0 V	3.12 A	50 mA	1835 mA	85%	ICH7548WS24

† Available from Farnell & element14. See pages 284-290.

^ Available from Newark. See pages 291-296.



## Models & Ratings

Input Voltage	Output Voltage	Output Current	Input Current <sup>(4)</sup>		Efficiency	Model Number <sup>(2)</sup>
			No Load	Full Load		
18-36 VDC (24 V nominal)	2.5 V	20.00 A	50 mA	2705 mA	77%	ICH10024S2V5
	3.3 V	20.00 A	50 mA	3480 mA	79%	ICH10024S3V3
	5.0 V	20.00 A	50 mA	5020 mA	83%	ICH10024S05
	12.0 V	8.30 A	50 mA	4880 mA	85%	ICH10024S12†^
	15.0 V	6.70 A	50 mA	4925 mA	85%	ICH10024S15
	24.0 V	4.17 A	50 mA	4905 mA	85%	ICH10024S24
36-75 VDC (48 V nominal)	2.5 V	20.00 A	50 mA	1335 mA	78%	ICH10048S2V5
	3.3 V	20.00 A	50 mA	1720 mA	80%	ICH10048S3V3
	5.0 V	20.00 A	50 mA	2480 mA	84%	ICH10048S05
	12.0 V	8.30 A	50 mA	2442 mA	85%	ICH10048S12
	15.0 V	6.70 A	50 mA	2463 mA	85%	ICH10048S15
	24.0 V	4.17 A	50 mA	2463 mA	85%	ICH10048S24

Input Voltage	Output Voltage	Output Current	Input Current <sup>(4)</sup>		Efficiency	Model Number <sup>(2)</sup>
			No Load	Full Load		
9-36 VDC (24 V nominal)	3.3 V	20.00 A	35 mA	3374 mA	81%	ICH10024WS3V3
	5.0 V	20.00 A	35 mA	4990 mA	83%	ICH10024WS05
	12.0 V	8.30 A	35 mA	4902 mA	85%	ICH10024WS12
	15.0 V	6.70 A	35 mA	4817 mA	86%	ICH10024WS15
	24.0 V	4.17 A	35 mA	4849 mA	86%	ICH10024WS24
	18-75 VDC (48 V nominal)	3.3 V	20.00 A	30 mA	1708 mA	80%
5.0 V		20.00 A	30 mA	2422 mA	86%	ICH10048WS05
12.0 V		8.30 A	30 mA	2408 mA	86%	ICH10048WS12
15.0 V		6.70 A	30 mA	2381 mA	87%	ICH10048WS15
24.0 V		4.17 A	30 mA	2367 mA	88%	ICH10048WS24

Input Voltage	Output Voltage	Output Current	Input Current <sup>(4)</sup>		Efficiency	Model Number <sup>(2)</sup>
			No Load	Full Load		
36-75 VDC (48 V nominal)	2.5 V	30.00 A	25 mA	2.10 A	74%	ICH15048S2V5
	3.3 V	30.00 A	25 mA	2.60 A	79%	ICH15048S3V3
	5.0 V	30.00 A	25 mA	3.70 A	83%	ICH15048S05
	12.0 V	12.50 A	25 mA	3.60 A	85%	ICH15048S12
	15.0 V	10.00 A	25 mA	3.60 A	85%	ICH15048S15
	24.0 V	6.25 A	25 mA	3.60 A	85%	ICH15048S24

Input Voltage	Output Voltage	Output Current	Input Current <sup>(4)</sup>		Efficiency	Model Number <sup>(2)</sup>
			No Load	Full Load		
36-75 VDC (48 V nominal)	2.5 V	40.00 A	25 mA	2.8 A	74%	IFH20048S2V5
	3.3 V	40.00 A	25 mA	3.5 A	79%	IFH20048S3V3
	5.0 V	40.00 A	25 mA	5.0 A	83%	IFH20048S05
	12.0 V	17.00 A	25 mA	5.0 A	85%	IFH20048S12
	15.0 V	13.30 A	25 mA	5.0 A	85%	IFH20048S15
	24.0 V	8.33 A	25 mA	5.0 A	85%	IFH20048S24
	28.0 V	7.14 A	25 mA	4.7 A	89%	IFH20048S28
	48.0 V	4.20 A	25 mA	4.7 A	90%	IFH20048S48

### Notes


- Logic compatibility: Module On = Open circuit (or >3.5 VDC for ICH100 W models). Module Off = <0.8 VDC (<1.8 VDC for ICH100 W models).
- Add suffix 'N' to the model number to receive the unit with negative logic Remote On/Off.
- Ripple & noise is measured with a 10 μF tantalum capacitor and 0.1 μF ceramic capacitor across output.
- Input current specified at 24 V for 18-36 & 9-36 VDC and 48 V for 36-75 & 18-75 VDC models.
- For dual output models available, contact sales.

† Available from Farnell. See pages 284-290.


^ Available from Newark. See pages 291-296.

## Mechanical Details

### ICH50 to ICH150

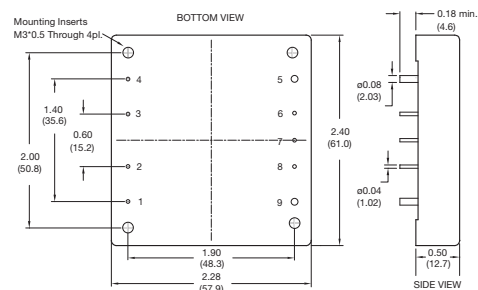

### IFH200

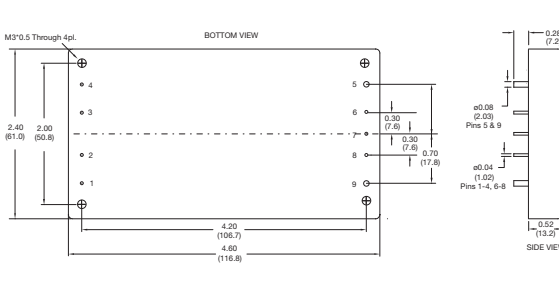

PIN CONNECTIONS	
Pin	Function
1	+Vin
2	On/Off
3	Case*
4	-Vin
5	-Vout
6	-Sense
7	Trim
8	+Sense
9	+Vout

\* IFH200: N.C.

### Notes


- All dimensions are in inches (mm)
- Weight: ICH50: 0.194 lbs (88 g)  
ICH50W: 0.207 lbs (94 g)  
ICH75: 0.202 lbs (92 g)  
ICH75W: 0.207 lbs (94 g)  
ICH100: 0.209 lbs (95 g)  
ICH150: 0.220 lbs (100 g)  
IFH200: 0.425 lbs (193 g)
- Case tolerance: ±0.02 (±0.50)
- Pin diameter tolerance: ICH series ±0.002 (±0.05), ±0.004 (±0.1),  
IFH series ±0.006 (±0.15)
- Case Material: ICH50/75/100/150 - Aluminium  
IFH200 - Aluminium baseplate with plastic case
- Pin pitch tolerance: ±0.01 (±0.25)

THERMAL RESISTANCE vs AIR FLOW		
Air Flow Rate	ICH Typical Rca	IFH Typical Rca
Natural Convection 20 ft./min (0.1 m/s)	7.12 °C/W	3.82 °C/W
100 ft./min (0.5 m/s)	6.21 °C/W	3.23 °C/W
200 ft./min (1.0 m/s)	5.17 °C/W	2.71 °C/W
300 ft./min (1.5 m/s)	4.29 °C/W	2.28 °C/W
400 ft./min (2.0 m/s)	3.64 °C/W	1.92 °C/W
500 ft./min (2.5 m/s)	2.96 °C/W	1.68 °C/W
600 ft./min (3.0 m/s)	2.53 °C/W	1.50 °C/W
700 ft./min (3.5 m/s)	2.37 °C/W	1.35 °C/W
800 ft./min (4.0 m/s)	2.19 °C/W	1.23 °C/W


Temperature Rise = Pd x Rca, Where Pd = Pin - Pout or Pout (1-η) / η, Where η= efficiency

Maximum Power Dissipation vs Ambient Temperature and Air Flow (without Heatsink)

ICH50-150S

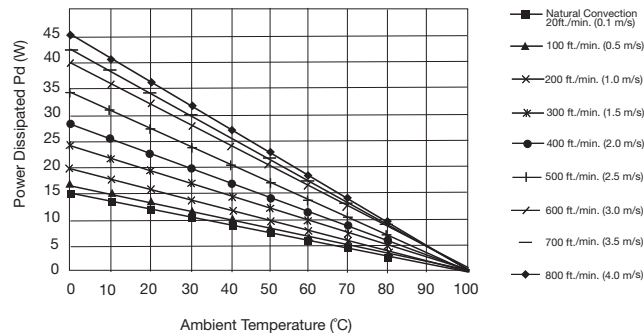


IFH200S

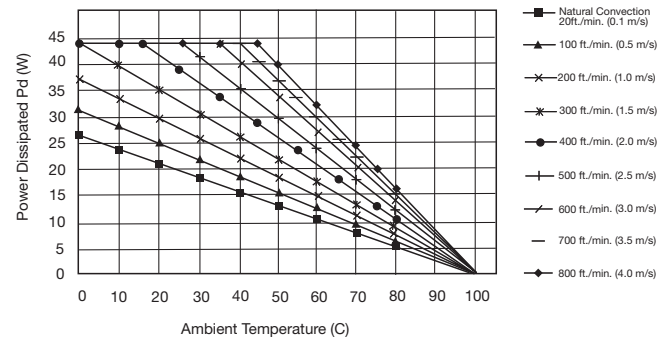

Application Notes


External Output Trimming

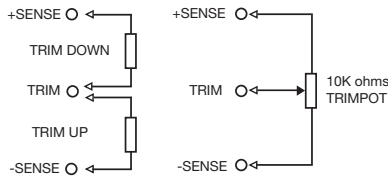

LOGIC TABLE		
Logic State (Pin 2)	Positive Logic	Negative Logic (-N)
Logic Low Switch Closed	Module Off	Module On
Logic High Switch Open	Module On	Module Off

Output may be trimmed by ±10% (±5% for dual output models) with a fixed resistor or an external trimpot as shown. Contact sales for details.

Output Noise

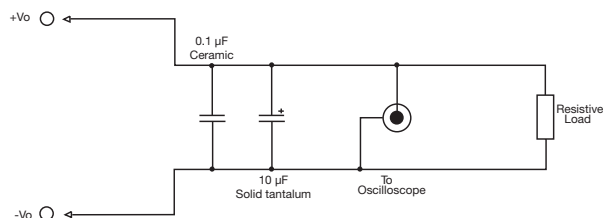

Output noise is measured with a 10 μF tantalum capacitor and 0.1 μF ceramic capacitor across output. Oscilloscope limited to 20 MHz bandwidth