


# MI810

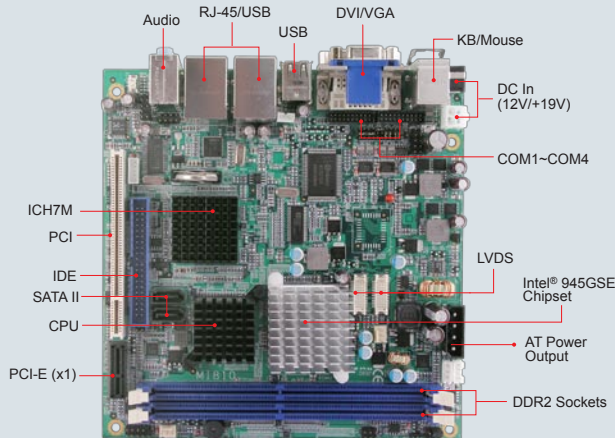

## Features

- Onboard Intel® Atom™ Processor N270, 1.6GHz, 533MHz FSB
- 2x DDR2 DIMM, Max. 2GB
- Supports CRT, DVI and LVDS (dual display)
- 10/100 BaseT and PCI-E Gigabit LAN
- 2x SATA, 8x USB 2.0, 4x COM, 1x IDE
- 1x PCI, 1x PCI-E(x1), 1x Mini PCI-E(x1)

## System

CPU	Intel® Atom™ Processor N270, 1.6GHz
System Memory	2x DDR2 DIMM, 533MHz, Max. 2GB
System Chipset	Intel® 945GSE + ICH7M, 533MHz FSB
BIOS	Award
Watchdog Timer	256 levels
SSD	CF socket
H/W Monitor	Yes
Expansion Slots	1x PCI, 1x PCI-E (x1), 1x Mini PCI-E (x1)

## Graphics

VGA Controller	Intel® 945GSE integrated GMA950
VGA Memory	Supports DVMT 3.0; Max. shared memory - 224MB
Display Interface	Supports CRT and 18-bit dual channels LVDS interface, onboard Chronitel CH7307 for DVI

## Ethernet

Controller	Intel® ICH7M integrated 10/100BaseT LAN, optional Intel® 82574L PCI-E Gigabit LAN
Connector	RJ-45 on board

## Multi I/O

Chipset	Winbond W83627EHG, Fintek F81216DG 1x IDE, 1x KB, 1x mouse, 1x LPT, 3x RS-232, 1x RS-232/422/485, 2x SATA
USB	6 ports on board Pin header for 2 ports (USB 2.0)
Audio	Intel® ICH7M built-in audio w/ Realtek ALC662 codec for 5.1CH
Others	Digital I/O (4-in/4-out), +12V/+19V DC In



## Mechanical and Environmental

Dimensions	170mm x 170mm (6.7" x 6.7")
Max. Power Requirement	Intel® Atom™ N270 1.6GHz w/ 2x 1GB DDR2-800 +12V: 2.65A
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	10%~90% (non-condensing)

## Ordering Information

MI810	Intel® Atom™ N270 945GSE Mini-ITX motherboard w/ VGA and 10/100 LAN
MI810F	Intel® Atom™ N270 945GSE Mini-ITX motherboard w/ VGA, 10/100 and PCI-E Gigabit LAN
CMI300-810F	Mini-ITX system with MI810F, Intel® Atom™ N270 (1.6GHz) CPU, 1GB DDR2 DIMM, 2.5" 80GB HDD, 60W power adaptor



### Remarks:

1. For optional daughter boards and riser cards, please refer to page 19-20.
2. Specifications are subject to change without prior notice.

