


TR6C-S

6U Individual Cassette Enclosure

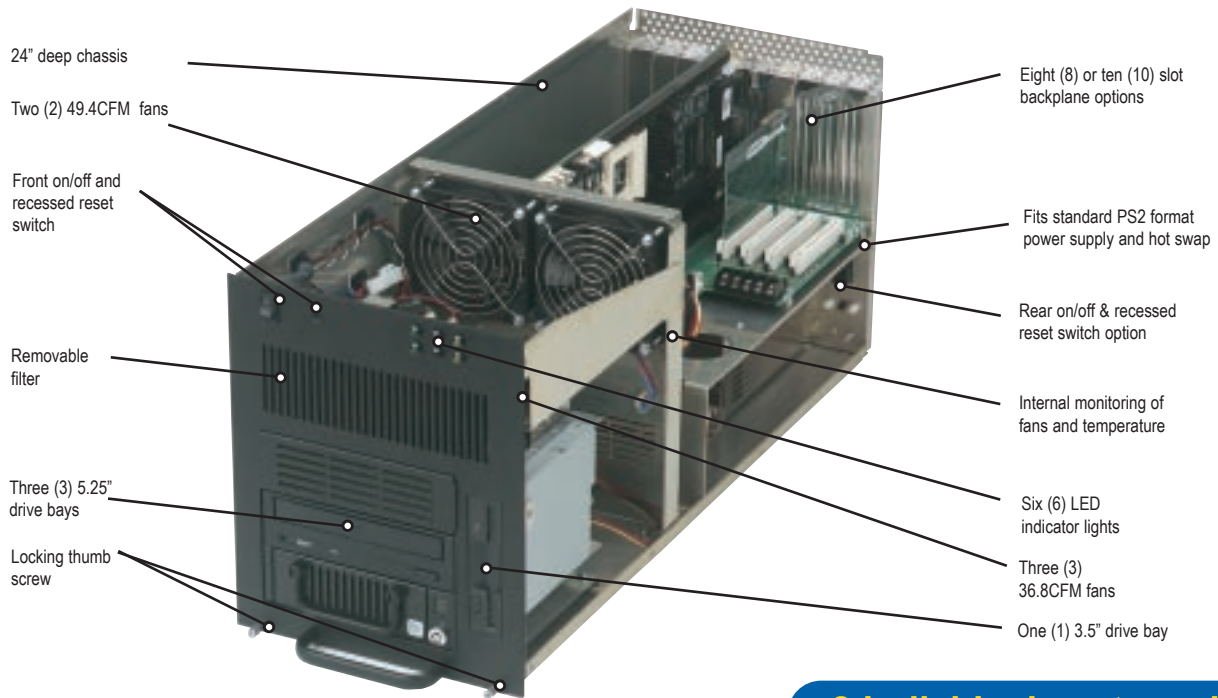

2 individual systems in 6U

Ordering Information

- TR6C-S-A0-BLK-008**
6U 8 slot cassette enclosure, with 3 x 5.25" drive bay and alarm module.
- TR6C-S-A0-BLK-010**
6U 10 slot cassette enclosure, with 3 x 5.25" drive bay and alarm module.
- OP-TR6C-S**
Mounting shelf for 6U cassette enclosures, 8 or 10 slot versions.



TR6C-S showing hot swap power supply

Specifications

Dimensions

- 6U height
- 10.5" (H) x 8.8" (W) x 24" (D)
266mm (H) x 224mm (W) x 611mm (D)
- 2 individual systems in 6U

Standard Colour Options

- Black, cream and grey

Backplanes

- 8 slot ISA
- 8 slot ISA/PCI
- 10 slot ISA/PCI

Drive Bays

- Three x 5.25" drive bays
- One x 3.5" drive bay

Rear Panel

- AC input for power supply
- ON / OFF switch option
- Recessed reset option

Cooling

- Two 49.4CFM fans
- Three 36.8CFM fans

Front Panel Options

- 6 x LEDs
- On/off switch
- Recessed reset switch
- Locking thumb screws

Alarm Module

- Over temperature sensor
- Fan sensor
- Audible buzzer
- LED indicator

Power Supplies (Call)

- Single 400W PSU(AC, 90-132/180-264Vac)
(+5V@ 50A) (+12V@ 27A)
(-5V@ 1A) (-12V@ 3A)
- Single 400W PSU(AC, 90-132/180-264Vac)
(+5V@ 50A) (+12V@ 27A)
(-5V@ 1A) (-12V@ 3A) (+3.3V@ 30A)
- Dual mini-redundant 300W ATX PSU
90-132/180-264Vac
(+5V@ 30A) (+12V@ 13A)
(-5V@ 1A) (-12V@ 1A) (+3.3V@ 22A)
DC Power supply optional (Call)

Cassette Shelf

- Mounting positions for enclosures
- Takes up no additional U space in rack

CE Approval

- EN 55022 class A
- EN50082-1
- EN60950

