


# SPECIFICATIONS



**Model Number:** TNE3A  
**Part Number:** 020172

August 3, 2005

## Mechanical Drawing:

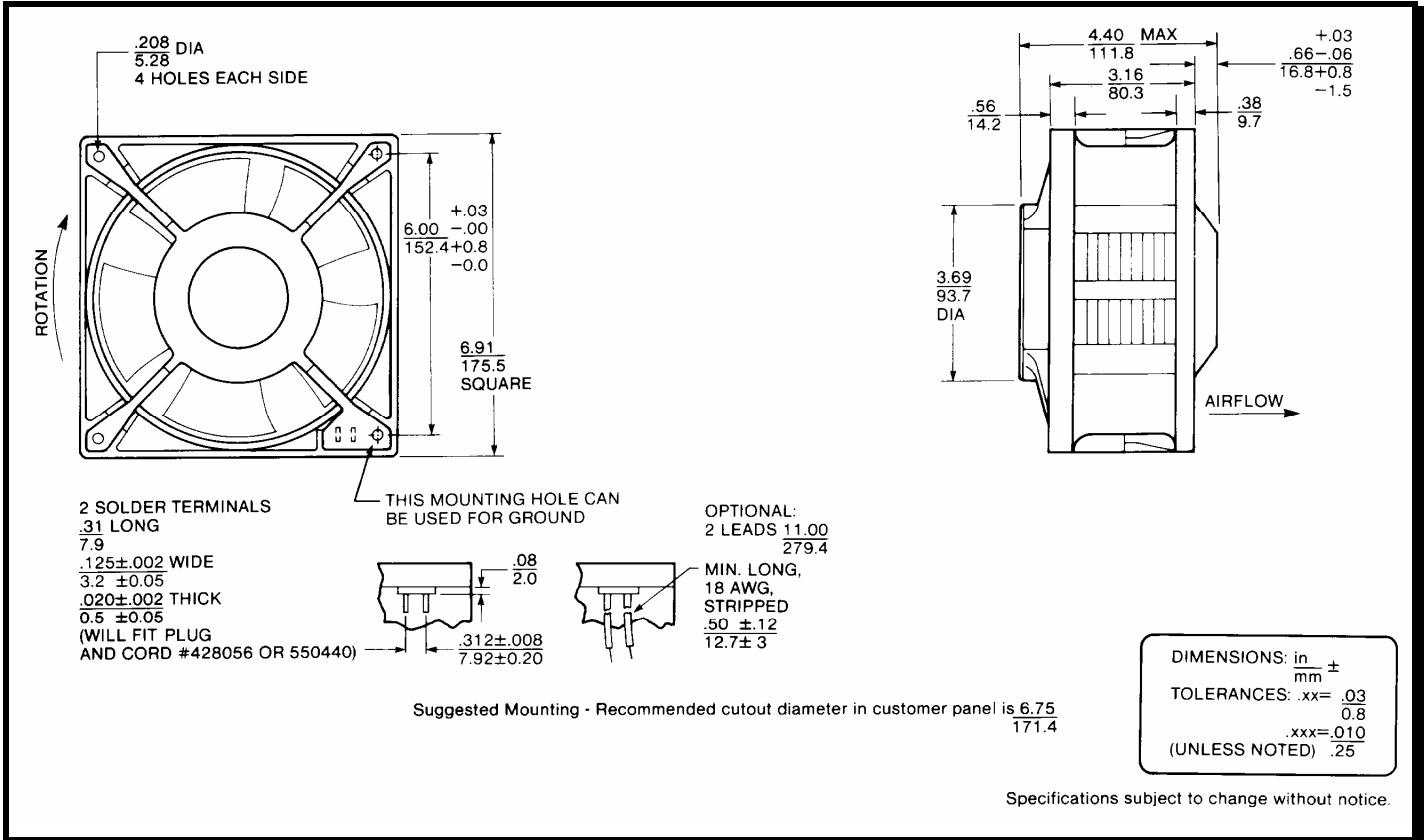

### Motor:

Frequency	= 50/60 Hz
Nominal Voltage	= 220/230 VAC
Nominal Running Current	= 0.260 Amps
Max. Locked Rotor Current	= 0.650 Amps
Running Power	= 59 Watts
Average Speed	= 3470 RPM
Bearings	= Ball
Air Flow	= 280/340 CFM
Acoustic	= 61.6/65.4 dBA

### Construction:

Venturi: Plastic, Black, UL 94V-0  
 Propeller & Cover: Plastic, Black, UL 94V-0

### Life Expectancy:

This fan is designed for continuous duty life of 25,000 hours at 40°C.

### Additional Features:

Permanent Split Capacitor Motor  
 Automatic Reset Thermal Protector  
 Locked Rotor Protection  
 Operating Temperature: -10°C to 70°C  
 Storage Temperature: -40°C to 85°C

### Termination:

Two blade terminals

### Agencies:

UL, CSA, TUV, CE