


## ENERGIZER NO. 1215

### AA

**SUPER HEAVY DUTY**



Industry Standard Dimensions in mm (inches)

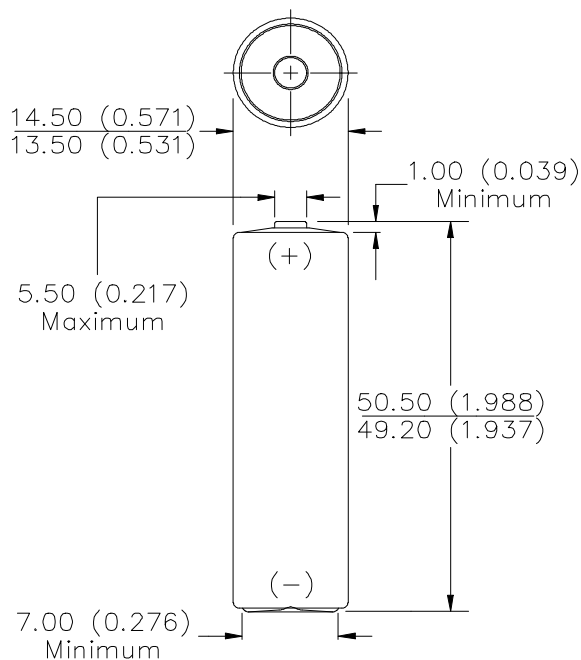

**Chemical System:** Zinc-Manganese Dioxide (Zn/MnO<sub>2</sub>)  
 (No Added Mercury or Cadmium)

**Designation:** ANSI-15D, IEC-R6  
**Battery Voltage:** 1.5 Volts  
**Operating Temp:** -18°C to 55°C (0°F to 130°F)  
**Average Weight:** 15.0 grams (0.5 oz.)  
**Volume:** 8.0 cubic centimeters (0.5 cubic inch)  
**Average Capacity:** 1,100 mAh to 0.8 volts  
 (Rated capacity at 25 mA continuous at 21°C)  
**Cell:** One No. 15 (size "AA")  
**Jacket:** Metal


### INTERNAL RESISTANCE VS. TEMPERATURE

The measurement is an approximation of the battery's actual internal resistance. It is sensitive to the loads and operator technique.


**Schedule:** Background Load 750 ohms  
 Pulse Load 4.0 ohms  
 Pulse Duration 1 second

Temperature	Typical Ri (ohms)
45°C (113°F)	0.4
21°C (70°F)	0.5
0°C (32°F)	0.8
-21°C (-4°F)	5.0

**CONSTANT RESISTANCE PERFORMANCE**  
 Typical Service

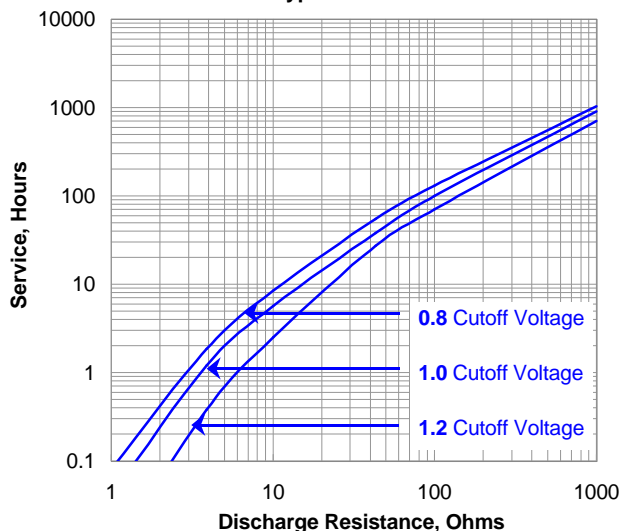

**CONSTANT CURRENT DISCHARGE**  
 Typical Service

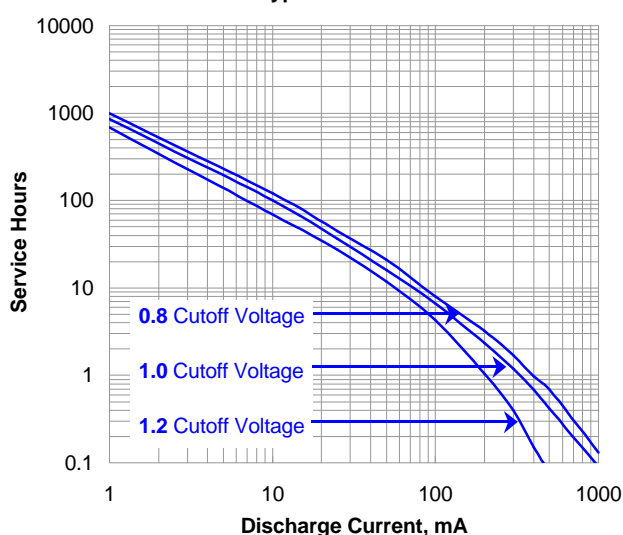

### Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.


**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. - All rights reserved


## ENERGIZER NO. 1215

### ANSI Industry Standard Tests @ 20° C


**RADIO**  
43 ohm - 4 hours/day

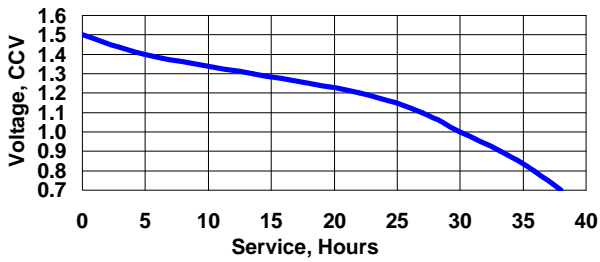


**RECORDER**  
10 ohm - 1 hr/day

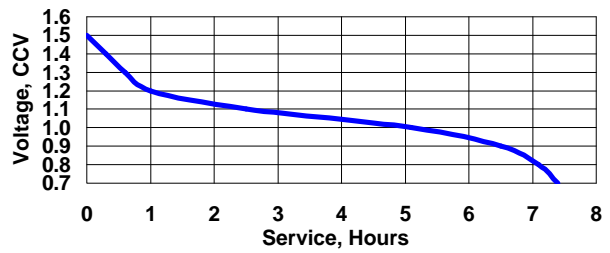

**TOY**  
3.9 ohm - 1 hr/day

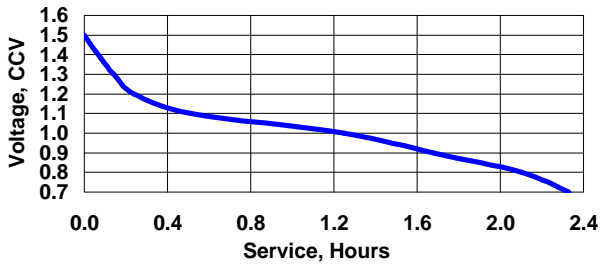

**PULSE TEST**  
1.8 ohms - 15sec/min 24 hours/day

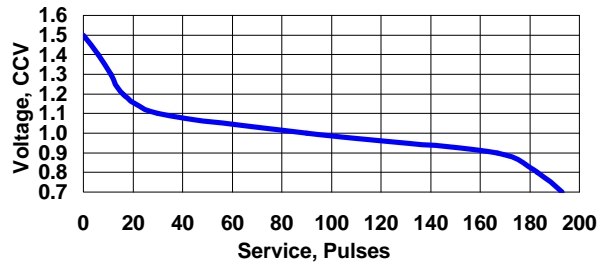

#### **Important Notice**

This data sheet contains information specific to batteries manufactured at the time of its publication.

**Contents herein do not constitute a warranty.**

Copyright © Eveready Battery Co. - All rights reserved