


ENERGIZER NO. 1222

9V

SUPER HEAVY DUTY



Industry Standard Dimensions in mm (inches)

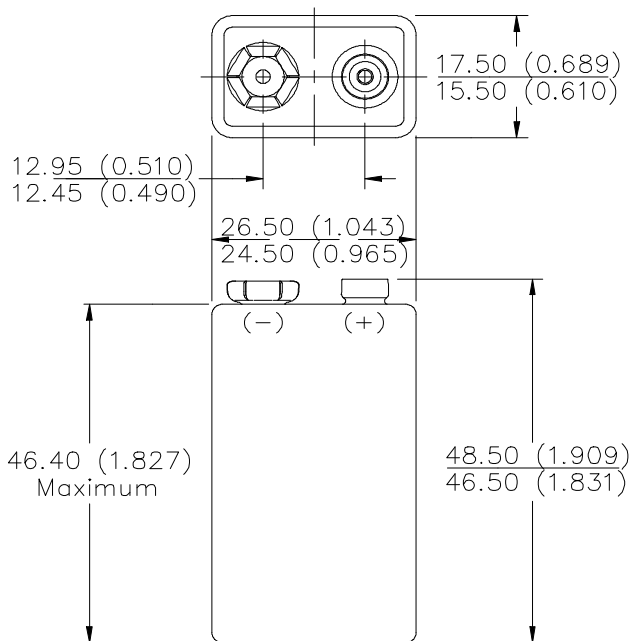

Chemical System: Leclanche
 Zinc-Manganese Dioxide (Zn/MnO₂)
 (No Added Mercury or Cadmium)

Designation: ANSI-1604D, IEC-6F22

Battery Voltage: 9.0 Volts

Operating Temp: -5°C to 55°C (20°F to 130°F)

Average Weight: 37.0 grams (1.3 oz.)


Volume: 20.3 cubic centimeters (1.2 cubic inch)

Average Capacity: 400 mAh to 0.8 volts per cell
 (Rated capacity at 5 mA continuous at 21°C)


Cell: Six No. 118P in series

Jacket: Metal


TEMPERATURE EFFECTS
 Typical Service to 4.8 Volts

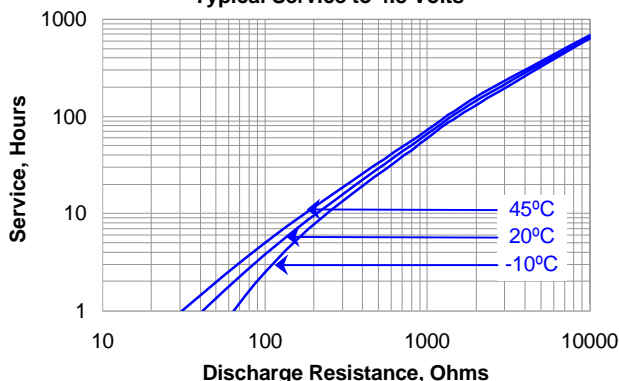

CONSTANT RESISTANCE PERFORMANCE
 Typical Service

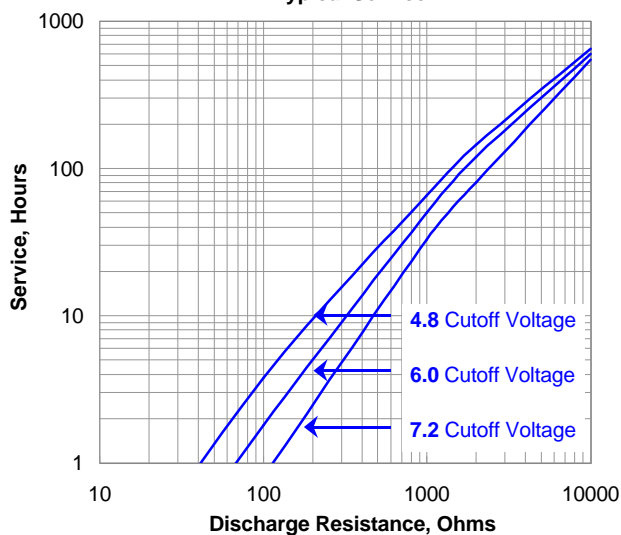

CONSTANT CURRENT DISCHARGE
 Typical Service

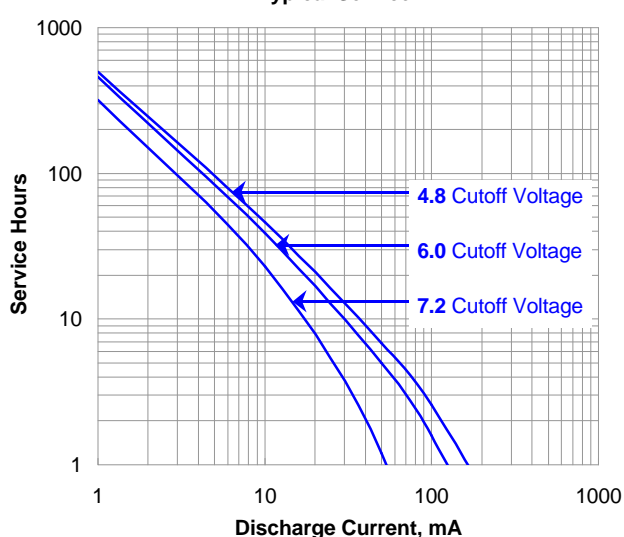

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.
Contents herein do not constitute a warranty.

ENERGIZER NO. 1222

Typical Applications

RADIO
620 ohm - 2 hours/day




TOY
270 ohm - 1 hr/day



CALCULATOR
180 ohm - 0.5 hr/day



RECORDER
180 ohms - 1 hr/day

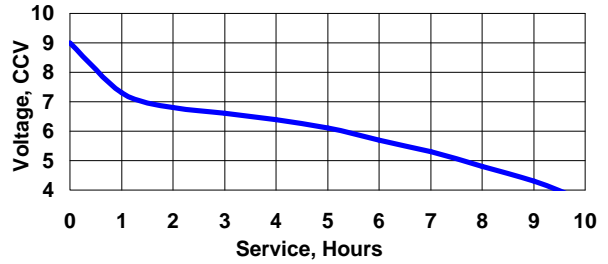

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.
Contents herein do not constitute a warranty.