
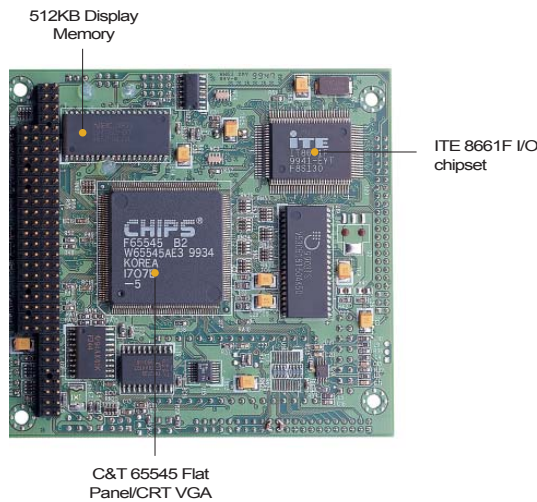


PCM-3336 386SX-40

LCD

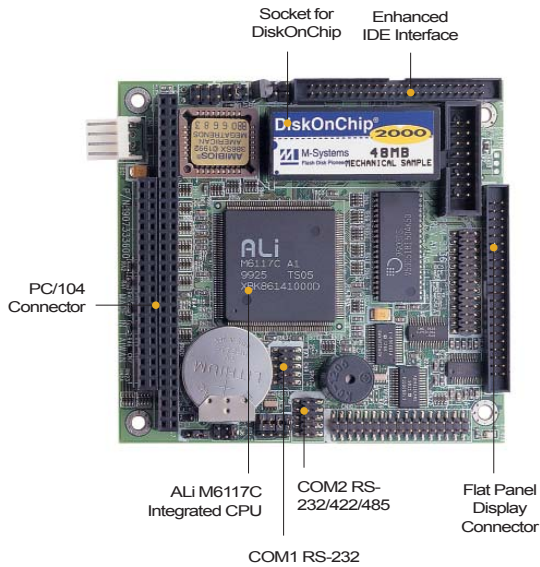

Features

- Onboard ALi M6117C, Intel® 386SX-40 compatible CPU
- Onboard 4MB/8MB Fast Page DRAM
- C&T 65545 LCD controller with 512KB display memory

Specifications

System

- | | |
|-------------------------|---|
| ■ CPU | ALi M6117C, Intel®80386SX-40 compatible CPU |
| ■ System Memory | Onboard 4MB(Rev A1.1) / 8MB (Rev A1.3) Fast Page DRAM |
| ■ Chipset | ALi M6117C |
| ■ I/O Chipset | ITE8661F. Fully 16-bit I/O decoded |
| ■ BIOS | AMI 128KB FLASH BIOS |
| ■ SSD | Supports DiskOnChip® up to 1GB |
| ■ Watchdog Timer | Can generate a system reset, IRQ or NMI |
| ■ Battery | Lithium battery |
| ■ DMA | 7 DMA channels (8237 equivalent) |
| ■ Interrupt | 15 interrupt levels (8259 equivalent) |
| ■ Power supply voltage | +5V (4.75V to 5.25V) |
| ■ Size/ Weight | 3.55" (L) x 3.775" (90mm x 96mm), 0.6lb (0.25kg) |
| ■ Operating temperature | 32°F to 140°F (0°C to 60°C) |

I/O

- | | |
|-------|--|
| ■ MIO | IDE x 1, FDD x 1, KB+Mouse x 1, RS-232 x 1, RS-232/422/485 x 1, Parallel x 1 |
|-------|--|

Display

- | | |
|-----------------|--------------------------------|
| ■ Chip | C&T 65545 |
| ■ Memory Size | Onboard 512KB display memory |
| ■ Resolution | Up to 800 x 600@ 256 colors |
| ■ LCD Interface | 24-bit TFT/DSTN/MONO LCD panel |

Packing List

- | | |
|----------------------------|------------|
| ■ IDE cable | |
| ■ FDD cable | |
| ■ Serial Port cable | |
| ■ Parallel Port cable | |
| ■ CRT cable | 9681333600 |
| ■ KB/Mouse cable | 1700080201 |
| ■ Quick Installation Guide | |